Batis generator

SERIES BRUSHLESS STAMFORD STYLE ALTERNATORS

PROLEADER POWER
LIGHT YOUR LIFE



8/8–800 kVA

Batis

SERIES BRUSHLESS STAMFORD STYLE ALTERNATORS





164


Technical Data


	Three phase, Class H(125°C/40°C)							Single phase, Class H(125°C/40°C)					
	50Hz(1500RPM)			60Hz (1800RPM)				50Hz(1500RPM)			60Hz(1800RPM)		
STAR-SERIES	380	400	415	416	440	460	480	220	230	240	220	230	240
STAR-PARALELL	190	200	208	208	220	230	240	110	115	120	110	115	120
DELTA-SERIES	220	230	240	240	254	266	267	N/A	N/A	N/A	N/A	N/A	N/A
DAC-164A													
RATED CAPACITY(KVA)	8.1	8.1	8.1	9.6	10.2	10.2	10.2	5.4	5.4	5.4	6.4	6.4	6.4
RATED POWER(KW)	6.5	6.5	6.5	7.7	8.2	8.2	8.2	4.3	4.3	4.3	5.1	5.1	5.1
EFFICIENCY %	75.5	76.2	76.6	75.7	75.8	76.4	77.0	69.6	69.6	70.0	69.5	70.1	70.6
DAC-164B													
RATED CAPACITY(KVA)	11.0	11.0	11.0	13.0	13.8	13.8	13.8	7.4	7.4	7.4	8.8	8.8	8.8
RATED POWER(KW)	8.8	8.8	8.8	10.4	11.0	11.0	11.0	5.9	5.9	5.9	7.0	7.0	7.0
EFFICIENCY %	78.7	79.4	79.8	79.0	79.1	79.7	80.2	73.5	73.8	73.9	73.3	73.9	74.4
DAC-164C													
RATED CAPACITY(KVA)	13.5	13.5	13.5	16.0	16.9	16.9	16.9	9.0	9.0	9.0	10.8	10.8	10.8
RATED POWER(KW)	10.8	10.8	10.8	12.8	13.5	13.5	13.5	7.2	7.2	7.2	8.6	8.6	8.6
EFFICIENCY %	80.1	80.7	81.1	80.3	80.4	81.0	81.5	75.2	75.5	75.7	75.0	75.6	76.0
DAC-164D													
RATED CAPACITY(KVA)	16.0	16.0	16.0	18.9	20.0	20.0	20.0	10.8	10.8	10.8	13.5	13.5	13.5
RATED POWER(KW)	12.8	12.8	12.8	15.1	16.0	16.0	16.0	8.6	8.6	8.6	10.8	10.8	10.8
EFFICIENCY %	81.0	81.7	82.1	81.3	81.4	82.0	82.5	76.5	76.7	76.9	76.4	76.9	77.4

Note: The generators have been designed for use in a maximum ambient temperature of 40°C and altitude less than 1000m above sea level
Other special voltage range can be met by YUKUN QIANGWEI company

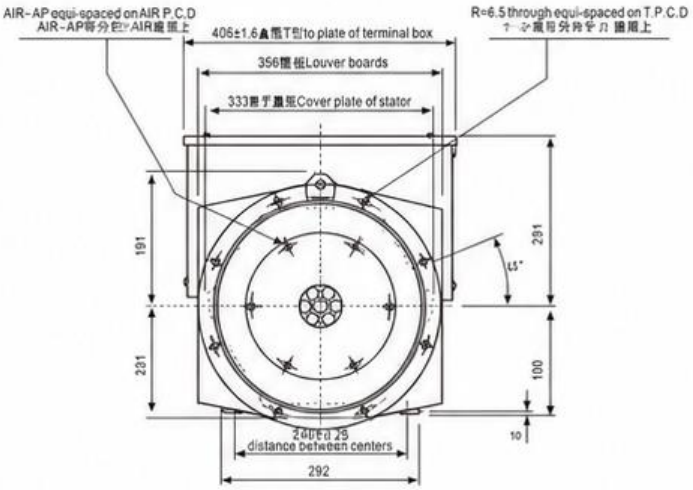

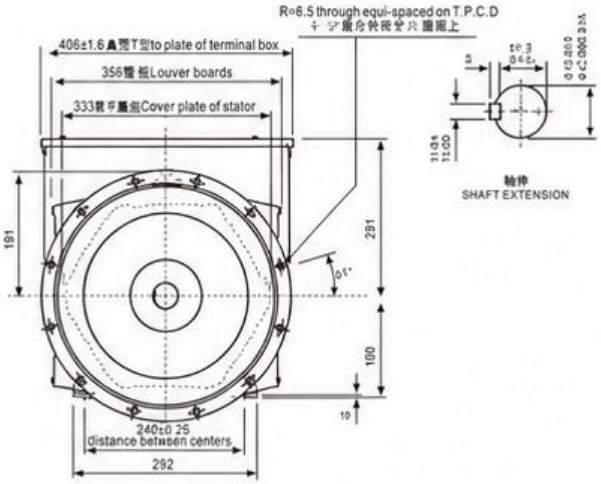

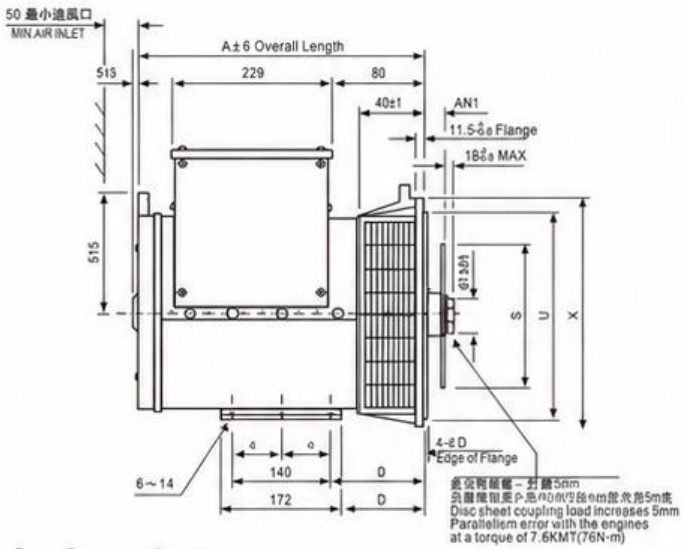

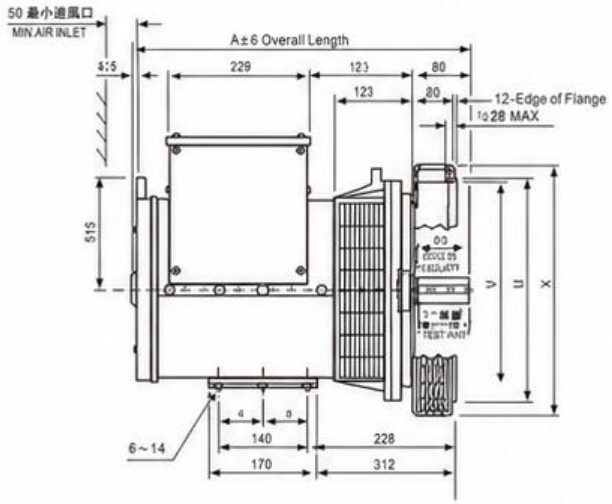

Single-bearing

DIMENSION		
TYPE	A	B
DAC-164A	391.5	107
DAC-164B	391.5	107
DAC-164C	391.5	107
DAC-164D	391.5	107

COUPLING DISC					
S.A.E.No.	AN	AM	AP	AR	V
6.5	30.16	6	8.7	200.0	215.8
7.5	30.16	8	8.7	222.2	241.2
8	61.9	6	11	244.5	263.4
10	53.98	8	11	295.3	314.2

ADAPTOR									
S.A.E.No.	AW	R	S	T	U°	W	X	C	D
2	132.3	12	11	466.7	15	447.6	489	172	156
3	105	8	11	428.6	15	409.5	451	145	129
4	93	8	11	381.0	15	361.9	402	133	117
5	93	8	11	333.3	22.5	314.3	356	133	117
6*	124.7	8	11	385.8	22.5	266.7	308	164.7	148.7

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-164A	85	95	53×55×59
DAC-164B	90	102	53×55×59
DAC-164C	96	110	53×55×59
DAC-164D	99	116	53×55×59

Double-bearing

DIMENSION		
TYPE	A	B
DAC-164A	484.5	123
DAC-164B	484.5	123
DAC-164C	511.5	137
DAC-164D	511.5	137

ADAPTOR							
S.A.E.No.	R	S	T	U°	V	W	X
2	12	11	466.7	15	432	447.6	495
3	12	11	428.6	15	396	409.5	451
4	12	11	381.0	15	352	361.9	403
5	8	11	333.3	22.5	301	314.3	356

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-164A	91	101	62×55×59
DAC-164B	98	108	62×55×59
DAC-164C	106	116	62×55×59
DAC-164D	112	122	62×55×59

All drawings and weight data for reference only, please contact YUKUN QIANGWEI company if there is any doubt

Batis

SERIES BRUSHLESS STAMFORD STYLE ALTERNATORS




184

Technical Data

	Three phase, Class H(125°C/40°C)							Single phase, Class H(125°C/40°C)					
	50Hz(1500RPM)			60Hz(1800RPM)				50Hz(1500RPM)			60Hz(1800RPM)		
STAR-SERIES	380	400	415	416	440	460	480	220	230	240	220	230	240
STAR-PARALLEL	190	200	208	208	220	230	240	110	115	120	110	115	120
DELTA-SERIES	220	230	240	240	254	266	277	N/A	N/A	N/A	N/A	N/A	N/A
DAC-184E													
RATED CAPACITY(KVA)	22.5	22.5	22.5	27.5	28.8	28.8	30.0	15.0	15.0	15.0	18.4	18.4	18.4
RATED POWER(KW)	18.0	18.0	18.0	22.0	23.0	23.0	24.0	12.0	12.0	12.0	14.7	14.7	14.7
EFFICIENCY %	83.7	84.5	84.5	83.4	83.6	84.1	84.2	81.3	81.7	81.9	79.9	80.6	81.1
DAC-184F													
RATED CAPACITY(KVA)	27.5	27.5	27.5	32.5	34.4	34.4	35.0	18.5	18.5	18.5	21.9	21.9	21.9
RATED POWER(KW)	22.0	22.0	22.0	26.0	27.5	27.5	28.0	14.8	14.8	14.8	17.5	17.5	17.5
EFFICIENCY %	85.3	86.0	86.0	85.4	85.5	86.0	86.1	82.7	83.3	83.3	81.9	81.9	82.8
DAC-184G													
RATED CAPACITY(KVA)	31.3	31.3	31.3	35.0	37.5	37.5	37.5	21.0	21.0	21.0	25.0	25.0	25.0
RATED POWER(KW)	25.0	25.0	25.0	28.0	30.0	30.0	30.0	16.8	16.8	16.8	20.0	20.0	20.0
EFFICIENCY %	85.7	86.4	86.4	86.3	86.3	86.7	87.0	83.7	83.9	83.9	83.0	83.0	83.7
DAC-184H													
RATED CAPACITY(KVA)	37.5	37.5	37.5	44.3	46.9	46.9	46.9	25.0	25.0	25.0	31.3	31.3	31.3
RATED POWER(KW)	30.0	30.0	30.0	35.4	37.5	37.5	37.5	20.0	20.0	20.0	25.0	25.0	25.0
EFFICIENCY %	86.2	86.9	86.9	86.2	86.3	86.7	87.0	82.9	82.9	82.9	82.8	82.8	82.8
DAC-184J													
RATED CAPACITY(KVA)	40.0	42.5	40.0	47.3	50.0	50.0	50.0	28.0	28.0	28.0	35.0	35.0	35.0
RATED POWER(KW)	32.0	34.0	32.0	37.8	40.0	40.0	40.0	22.4	22.4	22.4	28.0	28.0	28.0
EFFICIENCY %	87.6	87.1	87.1	87.3	86.7	86.8	87.2	87.5	83.0	83.0	82.9	83.0	83.0

Note: The generators have been designed for use in a maximum ambient temperature of 40°C and altitude less than 1000m above sea level
Other special voltage range can be met by YUKUN QIANGWEI company

DAC184 External Dimension

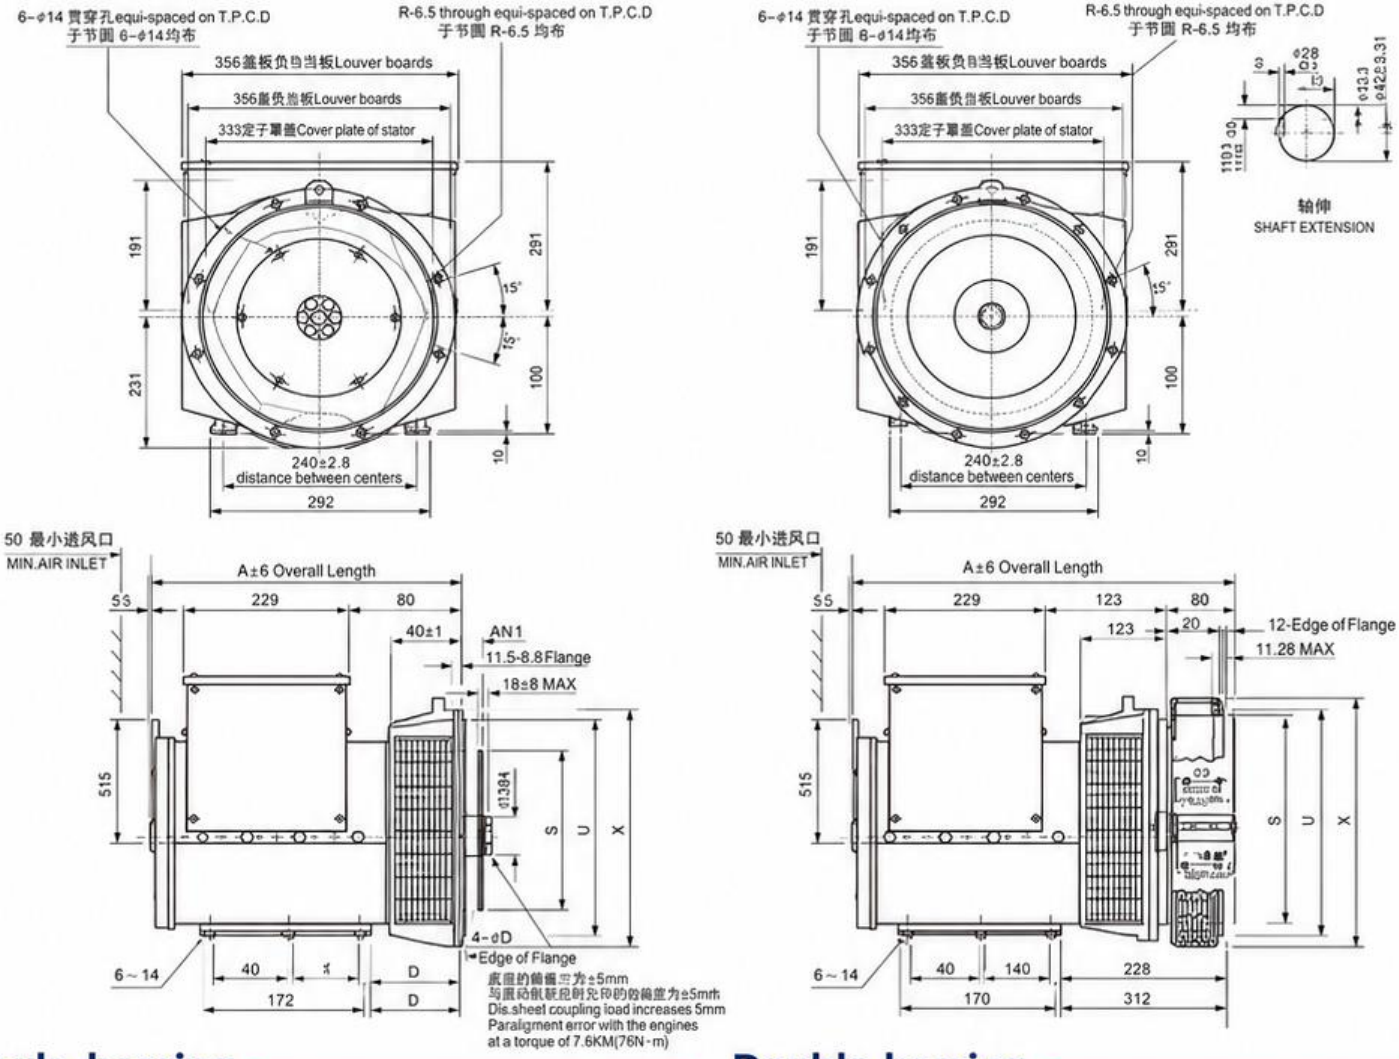

Single-bearing

COUPLING DISC						
S.A.E.No.	AN	AM	AP	AR	AT	V
6.5	30.16	6	8.7		200.0	215.8
7.5	30.16	8	8.7		222.2	241.2
8	61.9	8	11		244.5	263.4
10	53.98	8	11		295.3	314.2
11.5	39.68	8	11		383.4	352.3
14	25.4	8	13.5		438.2	466.5

ADAPTOR									
S.A.E.No.	AW	R	S	T	U°	V	W	w	x
2	132.3	12	11	466.7	15	447.6	489	172	156
3	105	8	11	428.6	15	409.5	451	145	129
4	93	8	11	381.0	15	361.9	402	133	117
5	93	8	11	333.3	22.5	314.3	356	133	117
6	124.7	8	11	385.8	22.5	266.7	308	164.7	148.7

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-184E	120	133	58 × 55 × 59
DAC-184F	150	156	67 × 55 × 59
DAC-184G	156	172	67 × 55 × 59
DAC-184H	216	226	74 × 55 × 59
DAC-184J	226	236	74 × 55 × 59

Double-bearing

DIMENSION						
TYPE	A	B	C	D	E	F
DAC-184E	551.5	177	65	228	82	77
DAC-184F	641.5	267	65	228	82	77
DAC-184G	641.5	267	65	228	82	77
DAC-184H	641.5	267	105	271	110	100
DAC-184J	641.5	267	105	271	110	100

ADAPTOR							
S.A.E.No.	R	S	T	U°	V	W	X
2	12	12	466.7	15	432	447.6	495
3	12	11	428.6	15	396	409.5	451
4	12	11	381.0	15	352	361.9	403
5	8	11	333.3	22.5	301	314.3	356

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-184E	131	141	62 × 55 × 59
DAC-184F	154	164	74 × 55 × 59
DAC-184G	170	180	74 × 55 × 59
DAC-184H	220	230	80 × 55 × 59
DAC-184J	230	240	80 × 55 × 59

All drawings and weight data for reference only, please contact YUKUN QIANGWEI company if there is any doubt

Batis

SERIES BRUSHLESS STAMFORD STYLE ALTERNATORS




224


Technical Data


DAC224																		
	50Hz(1500rpm)									60Hz(1800rpm)								
AMBIENT TEMP.	PRIME 40°C			PEAK 40°C			PEAK 27°C			PRIME 40°C			PEAK 40°C			PEAK 27°C		
TEMP. RISE	PRIME 125°C			STANDBY150°C			STANDBY163°C			PRIME 125°C			STANDBY 150°C			STANDBY163°C		
VOLTAGE	380	400	415	380	400	415	380	400	415	416	440	480	416	440	480	416	440	480
DAC-224C																		
RATED CAPACITY(KVA)	42.5	42.5	42.5	45.0	45.0	45.0	46.8	46.8	46.8	50.0	52.5	55.0	53.1	55.0	58.1	55.0	56.3	60.0
RATED POWER(KW)	34.0	34.0	34.5	36.0	36.0	36.0	37.4	37.4	37.4	40.0	42.0	44.0	42.5	44.0	46.5	44.0	45.0	48.0
EFFICIENCY %	86.6	87.1	87.4	86.2	86.2	87.1	86.0	86.6	86.9	87.1	87.5	88.1	86.7	87.2	87.8	86.8	87.1	87.6
DAC-224D																		
RATED CAPACITY(KVA)	50.0	50.0	50.0	53.0	53.0	53.0	55.0	55.0	55.0	60.0	62.5	65.0	62.5	65.0	68.8	65.0	66.3	71.3
RATED POWER(KW)	40.0	40.0	40.0	42.4	42.4	42.4	44.0	44.0	44.0	48.0	50.0	52.0	50.0	52.0	55.0	52.0	53.0	57.0
EFFICIENCY %	87.7	88.2	88.5	87.4	87.4	88.2	87.2	87.7	88.0	88.0	88.4	89.0	87.8	88.2	88.7	87.5	88.1	88.5
DAC-224E																		
RATED CAPACITY(KVA)	60.0	60.0	60.0	61.0	61.0	61.0	63.0	63.0	63.0	67.5	70.0	75.0	70.0	73.8	78.8	72.5	75.0	80.0
RATED POWER(KW)	48.0	48.0	48.0	48.8	48.8	48.8	50.4	50.4	50.4	54.0	56.0	60.0	56.0	59.0	63.0	58.0	60.0	64.0
EFFICIENCY %	88.3	88.8	89.1	88.2	88.2	89.0	88.0	88.5	88.8	88.8	89.2	89.6	88.6	88.9	89.4	88.4	88.8	89.3
DAC-224F																		
RATED CAPACITY(KVA)	72.5	72.5	72.5	77.0	77.0	77.0	80.0	80.0	80.0	83.8	87.5	93.8	88.8	92.5	100.0	91.9	95.0	102.5
RATED POWER(KW)	58.0	58.0	58.0	61.6	61.6	61.6	64.0	64.0	64.0	67.0	70.0	75.0	71.0	74.0	80.0	73.5	76.0	82.0
EFFICIENCY %	89.6	89.9	90.1	89.4	89.4	89.9	89.2	89.6	89.8	90.0	90.3	90.6	89.8	90.1	90.4	89.6	89.9	90.3
DAC-224G																		
RATED CAPACITY(KVA)	85.0	85.0	85.0	87.5	87.5	87.5	90.8	90.8	90.8	93.8	97.5	103.8	98.1	102.5	110.0	101.3	106.3	113.8
RATED POWER(KW)	68.0	68.0	68.0	70.0	70.0	70.0	72.6	72.6	72.6	75.0	78.0	83.0	78.5	82.0	88.0	81.0	85.0	91.0
EFFICIENCY %	89.8	90.2	90.4	89.7	89.7	90.3	89.6	89.9	90.1	90.5	90.8	91.0	90.3	90.6	90.9	90.2	90.4	90.8


Note: The generators have been designed for use in a maximum ambient temperature of 40°C and altitude less than 1000m above sea level
Other special voltage range can be met by YUKUN QIANGWEI company

DAC224 External Dimension

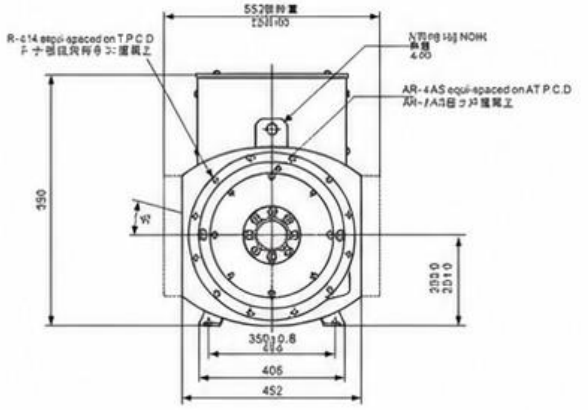

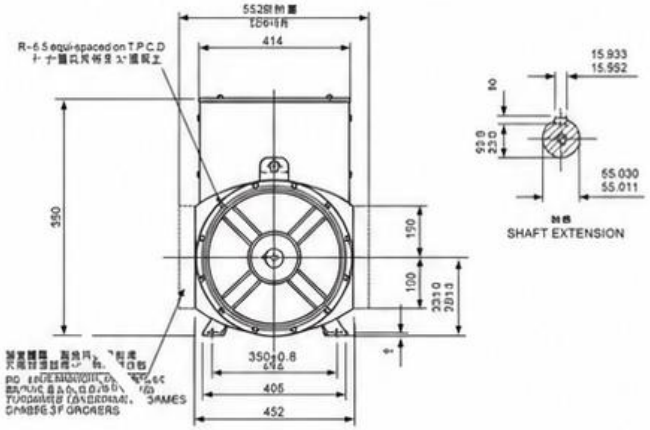

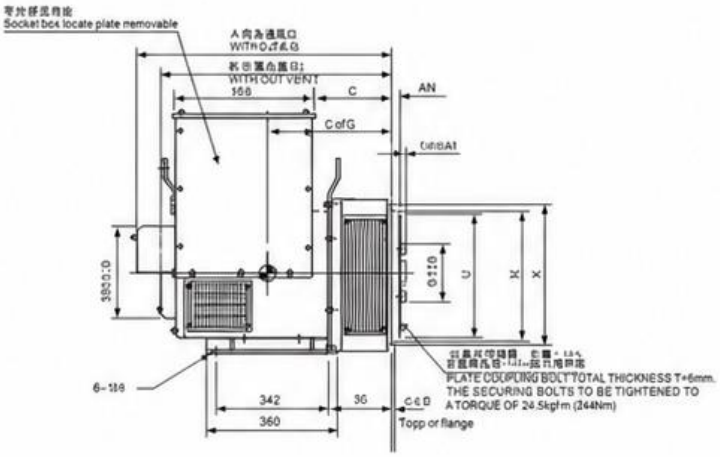

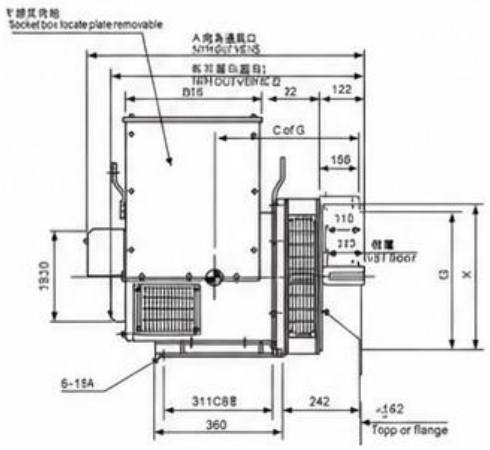

Single-bearing

DIMENSION					
	TYPE	A	B	C	C of G
SAE1	DAC-224C	724.3	661.3	224.3	323
	DAC-224D	724.3	661.3	224.3	333
	DAC-224E	814.3	751.3	314.3	348
	DAC-224F	814.3	751.3	314.3	358
	DAC-224G	859.3	796.3	359.3	373
SAE2&3	DAC-224C	710	647	210	311
	DAC-224D	710	647	210	321
	DAC-224E	800	737	300	336
	DAC-224F	800	737	300	346
	DAC-224G	845	782	345	361

ADAPTOR							
S.A.E.No.	D	R	T	S	U	W	X
1	191.3	12	12.7	530.2	511.1		553
2	177	12	11	466.7	447.6		490
3	177	12	11	428.6	409.5		451
4	177	12	11	381.0	361.9		453

COUPLING DISC					
S.A.E.No.	AN	AR	AS	AT	V
8	61.9	6	10.3	244.5	263.4
10	53.98	8	10.3	295.3	314.2
11.5	39.68	8	10.3	333.4	352.3
14	25.40	8	13.5	438.2	466.5

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-224C	235	255	82×55×81
DAC-224D	250	270	82×55×81
DAC-224E	270	290	91×55×81
DAC-224F	310	330	91×55×81
DAC-224G	350	370	96×55×81

Double-bearing

DIMENSION				
TYPE	A	B	C	C of G
DAC-224C	792	729	170	368
DAC-224D	792	729	170	378
DAC-224E	882	819	260	393
DAC-224F	882	819	260	403
DAC-224G	972	864	305	418

ADAPTOR					
S.A.E.No.	R	S	T	W	R
1	12	12.7	530.2	511.17	553
2	12	11	466.7	447.6	495
3	12	11	428.6	409.5	451
4	12	11	381.0	361.9	403
5	8	11	333.3	314.3	356

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-224C	250	275	82×55×81
DAC-224D	270	295	82×55×81
DAC-224E	290	315	91×55×81
DAC-224F	320	345	91×55×81
DAC-224G	360	385	96×55×81

All drawings and weight data for reference only, please contact YUKUN QIANGWEI company if there is any doubt

Batis

SERIES BRUSHLESS STAMFORD STYLE ALTERNATORS




274


Technical Data


	DAC274																	
	50Hz(1500rpm)									60Hz(1800rpm)								
AMBIENT TEMP.	PRIME 40°C			PEAK 40°C			PEAK 27°C			PRIME 40°C			PEAK 40°C			PEAK 27°C		
TEMP. RISE	PRIME 125°C			STANDBY150°C			STANDBY163°C			PRIME 125°C			STANDBY150°C			STANDBY163°C		
VOLTAGE	380	400	415	380	400	415	380	400	415	416	440	480	416	440	480	416	440	480
DAC-274J																		
RATED CAPACITY(KVA)	230	230	230	250	250	250	260	260	260	269	281	300	288	300	319	294	306	325
RATED POWER(KW)	184	184	184	200	200	200	208	208	208	215.2	224.8	240	230.4	240	255.2	235.2	244.8	260
EFFICIENCY %	92.4	92.6	92.6	92.1	92.2	92.3	91.8	92.0	92.1	92.8	92.8	92.8	92.5	92.5	92.5	92.4	92.4	92.4
DAC-274K																		
RATED CAPACITY(KVA)	250	250	250	265	265	365	275	275	275	291	299	312.5	304	312.5	331.3	312	320	343.8
RATED POWER(KW)	200	200	200	212	212	212	220	220	220	232.8	239.2	250	243.2	250	265	149.6	256	275
EFFICIENCY %	92.5	92.7	92.8	92.2	92.4	92.6	92.0	92.2	92.4	92.6	92.7	92.9	92.4	92.6	92.7	92.2	92.4	92.5


Note: The generators have been designed for use in a maximum ambient temperature of 40°C and altitude less than 1000m above sea level
Other special voltage range can be met by YUKUN QIANGWEI company

DAC274 External Dimension

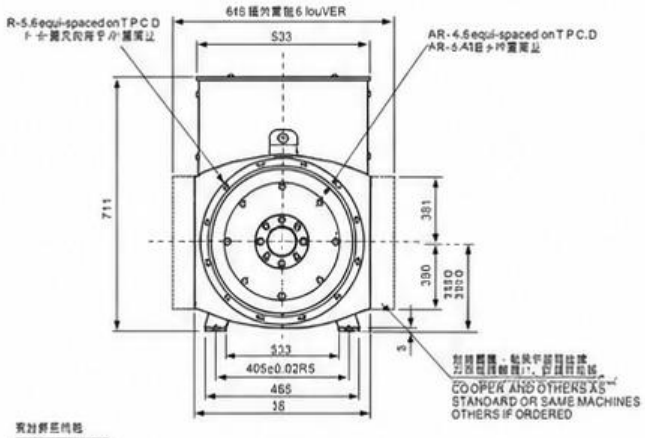

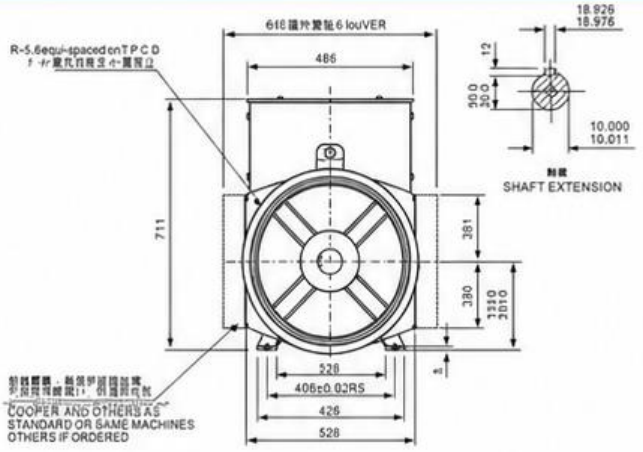

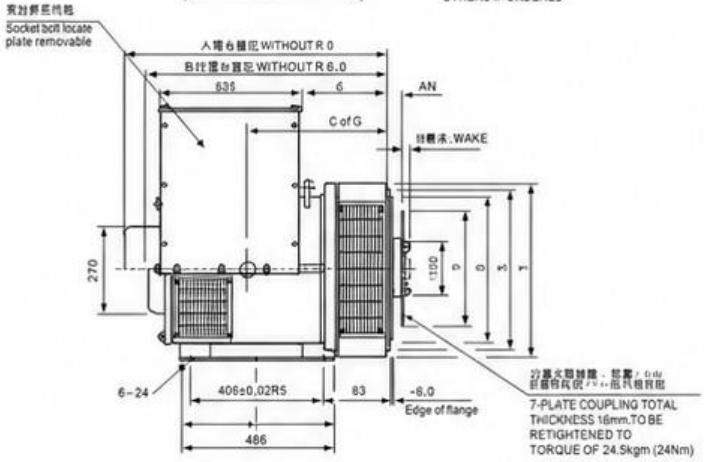

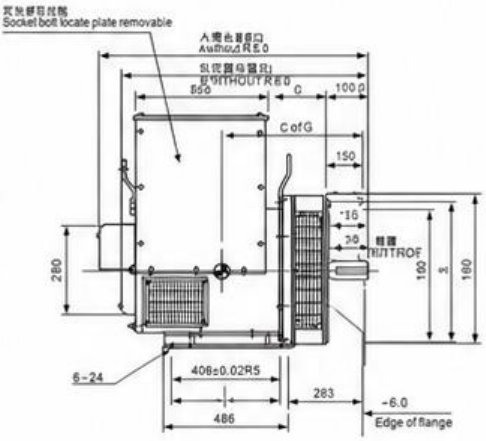

Single-bearing

DIMENSION						
	TYPE	A	B	C	E	C of G
SAE1	DAC-274C	813.3	750.3	274.3	554	365
	DAC-274D	831.3	750.3	274.3	554	375
	DAC-274E	928.3	865.3	389.3	554	390
	DAC-274F	928.3	865.3	389.3	554	415
	DAC-274G	978.3	915.3	439.3	554	435
	DAC-274H	1018.3	955.3	479.3	554	455
SAE2 & 3	DAC-274C	799	736	260	554	398
	DAC-274D	799	736	260	554	422
	DAC-274E	914	851	375	554	489
	DAC-274F	914	851	375	554	527
	DAC-274G	964	904	425	554	579
	DAC-274H	1004	941	465	554	625

ADAPTOR							
S.A.E.No.	D	R	S	T	W	W	Y
1	216.3	12	12.7	530.2	511.1	533	580
2	202	12	11	466.7	447.6	490	530
3	202	12	11	428.6	409.5	451	530

COUPLING DISC					
S.A.E.No.	AN	AR	AS	AT	V
10	53.98	8	10.3	295.3	314.2
11.5	39.68	8	10.3	333.4	352.3
14	25.40	8	13.5	438.2	466.5

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-S274C	385	415	91×65×87
DAC-S274D	405	435	91×65×87
DAC-S274E	455	485	100×65×87
DAC-S274F	500	530	100×65×87
DAC-S274G	550	580	105×65×87
DAC-S274H	600	630	100×65×87

Double-bearing

DIMENSION				
TYPE	A	B	C	C of G
DAC-274C	905	842	215	420
DAC-274D	905	842	215	430
DAC-274E	1020	957	330	445
DAC-274F	1020	957	330	475
DAC-274G	1070	1007	380	490
DAC-274H	1110	1047	420	510

ADAPTOR					
S.A.E.No.	R	S	T	W	X
1	12	12.7	530.2	511.17	553
2	12	11	466.7	447.6	489
3	12	11	428.6	409.5	451

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-274C	395	435	93×65×87
DAC-274D	420	460	93×65×87
DAC-274E	470	510	105×65×87
DAC-274F	510	550	105×65×87
DAC-274G	560	500	110×65×87
DAC-274H	610	650	114×65×87

All drawings and weight data for reference only, please contact YUKUN QIANGWEI company if there is any doubt

Batis

SERIES BRUSHLESS STAMFORD STYLE ALTERNATORS




274

Technical Data

DAC274																		
	50Hz(1500rpm)									60Hz(1800rpm)								
AMBIENT TEMP.	PRIME 40°C			PEAK 40°C			PEAK 27°C			PRIME 40°C			PEAK 40°C			PEAK 27°C		
TEMP. RISE	PRIME 125°C			STANDBY150°C			STANDBY163°C			PRIME 125°C			STANDBY 150°C			STANDBY163°C		
VOLTAGE	380	400	415	380	400	415	380	400	415	416	440	480	416	440	480	416	440	480
DAC-274C																		
RATED CAPACITY(KVA)	100.0	100.0	100.0	106.0	106.0	106.0	110.0	110.0	110.0	112.5	117.5	125.0	116.3	125.0	132.5	120.0	127.5	137.5
RATED POWER(KW)	80.0	80.0	80.0	84.8	84.8	84.8	88.0	88.0	88.0	90.0	94.0	100.0	93.0	100.0	106.0	96.0	102.0	110.0
EFFICIENCY %	89.8	90.3	90.6	89.5	90.0	90.4	89.2	89.8	90.2	90.2	90.6	91.1	90.0	90.2	90.8	89.8	90.1	90.6
DAC-274D																		
RATED CAPACITY(KVA)	114.0	120.0	114.0	121.0	127.0	121.0	125.0	130.0	125.0	131.3	137.5	146.3	137.5	145.0	156.3	142.5	150.0	158.8
RATED POWER(KW)	91.2	96.0	91.2	96.8	101.6	96.8	100.0	104.0	100.0	105.0	110.0	117.0	110.0	116.0	125.0	114.0	120.0	127.0
EFFICIENCY %	90.3	90.6	91.1	91.1	91.6	91.8	91.0	91.4	91.7	90.5	90.8	91.3	91.2	91.5	92.0	91.0	91.4	91.9
DAC-274E																		
RATED CAPACITY(KVA)	140.0	140.0	140.0	145.0	145.0	145.0	150.0	150.0	175.0	160.0	167.5	178.8	170.0	175.0	187.5	175.0	181.3	193.8
RATED POWER(KW)	128.0	128.0	128.0	136.0	136.0	136.0	140.0	140.0	140.0	128.0	134.0	165.0	150.0	160.0	170.0	154.0	165.0	175.0
EFFICIENCY %	92.0	91.7	92.5	91.7	92.1	92.3	91.6	92.0	92.2	92.1	92.4	92.7	91.0	92.2	92.6	91.9	92.1	92.5
DAC-274F																		
RATED CAPACITY(KVA)	160.0	160.0	160.0	170.0	170.0	170.0	175.0	175.0	175.0	181.3	190.0	206.3	187.5	200.0	212.5	192.5	206.3	218.8
RATED POWER(KW)	128.0	128.0	128.0	136.0	136.6	136.0	140.0	140.0	140.0	145.0	152.0	165.0	150.0	160.0	170.0	154.0	165.0	175.0
EFFICIENCY %	92.0	92.4	92.5	91.7	92.1	92.3	91.6	92.0	92.2	92.1	92.4	92.7	92.0	92.2	92.6	91.9	92.1	92.5
DAC-274G																		
RATED CAPACITY(KVA)	182.0	182.0	182.0	187.0	187.0	187.0	200.0	200.0	200.0	205.0	218.5	231.4	213.0	228.8	250.0	218.5	234.0	253.3
RATED POWER(KW)	145.6	145.6	145.6	149.6	149.6	149.6	160.0	160.0	160.0	164.0	174.8	185.1	170.4	183.0	200.0	174.8	187.2	202.6
EFFICIENCY %	92.0	92.4	92.6	91.9	92.2	92.5	91.7	92.1	92.3	92.2	92.4	92.7	92.0	92.2	92.5	91.9	92.1	92.5
DAC-274H																		
RATED CAPACITY(KVA)	200.0	200.0	200.0	212.0	212.0	212.0	220.0	220.0	220.0	237.5	245.0	255.0	250.0	258.8	275.0	256.3	265.0	280.0
RATED POWER(KW)	160.0	160.0	160.0	169.6	169.6	169.6	176.0	176.0	176.0	190.0	196.0	204.0	200.0	207.0	220.0	205.0	212.0	224.0
EFFICIENCY %	93.0	93.3	93.4	92.8	93.1	93.3	92.7	93.0	93.2	93.0	93.2	93.6	92.8	93.1	93.4	92.7	93.0	93.3

Note: The generators have been designed for use in a maximum ambient temperature of 40°C and altitude less than 1000m above sea level
Other special voltage range can be met by YUKUN QIANGWEI company

DAC274 External Dimension

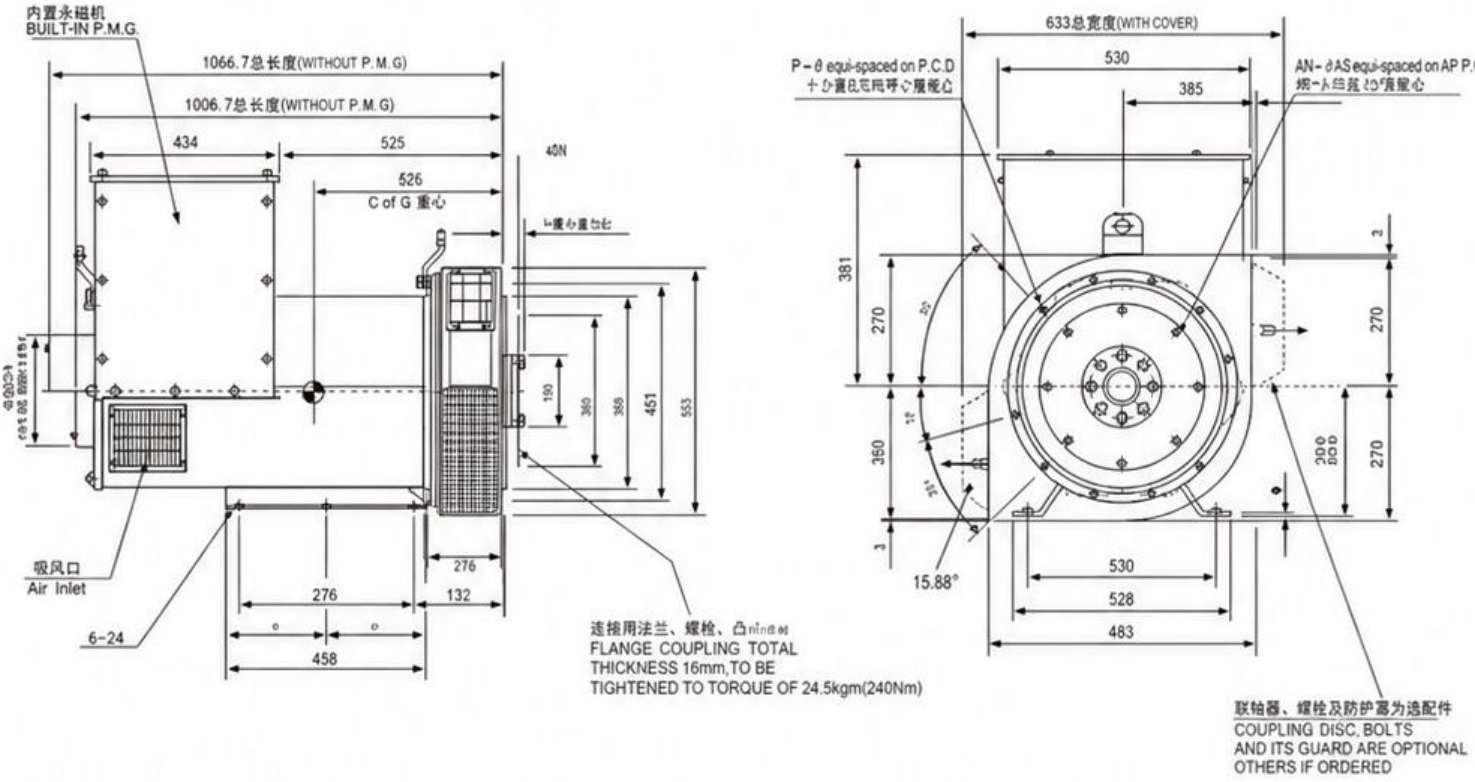

Single-bearing

ADAPTOR						
S.A.E.No.	R	S	T	W	X	Y
1	10	12.7	530.2	511.1	553	575
2	10	11.0	466.7	447.6	489	575

COUPLING DISC					
S.A.E.No.	AN	AR	AS	AT	V
11.5	39.68	8	11.0	333.3	352.35
14	25.4	8	13.5	438.2	466.67

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-274J	720	760	115x70x90
DAC-274K	740	760	115x70x90

All drawings and weight data for reference only, please contact YUKUN QIANGWEI company if there is any doubt

Batis

SERIES BRUSHLESS STAMFORD STYLE ALTERNATORS




314


Technical Data


DAC314																		
	50Hz(1500rpm)									60Hz(1800rpm)								
AMBIENT TEMP.	PRIME 40°C			PEAK 40°C			PEAK 27°C			PRIME 40°C			PEAK 40°C			PEAK 27°C		
TEMP. RISE	PRIME 125°C			STANDBY150°C			STANDBY163°C			PRIME 125°C			STANDBY150°C			STANDBY163°C		
VOLTAGE	380	400	415	380	400	415	380	400	415	416	440	480	416	440	480	416	440	480
DAC-314C																		
RATED CAPACITY(KVA)	250	250	250	270	270	270	275	275	275	287.5	300	315	300	320	335	310	330	345
RATED POWER(KW)	200	200	200	216	216	216	220	220	220	230	240	252	240	256	268	248	264	276
EFFICIENCY %	92.5	92.8	93.0	92.0	92.3	92.6	91.8	92.2	92.5	92.6	92.7	93.0	92.3	92.3	92.7	92.1	92.2	92.5
DAC-314D																		
RATED CAPACITY(KVA)	300	300	300	320	320	320	330	330	330	343.7	360	375	365	385	400	375	395	415
RATED POWER(KW)	240	240	240	256	256	256	264	264	264	275	288	300	292	308	320	300	316	332
EFFICIENCY %	92.7	93.0	93.2	92.3	92.7	92.9	92.1	92.5	92.9	92.9	93.0	93.3	92.5	92.6	93.0	92.4	92.5	92.8
DAC-314E																		
RATED CAPACITY(KVA)	325	325	325	345	345	345	358	358	358	381	394	419	406	419	444	419	431	456
RATED POWER(KW)	260	260	260	276	276	276	286	286	286	305	315.2	335.2	325	335	355	335	345	365
EFFICIENCY %	93.6	93.7	93.8	92.7	93.0	93.2	92.7	93.0	93.2	93.6	93.7	93.8	93.2	93.2	93.3	92.4	92.7	93.1
DAC-314F																		
RATED CAPACITY(KVA)	350	350	350	370	370	370	380	400	400	400	420	440	420	445	460	435	455	475
RATED POWER(KW)	280	280	280	296	296	296	304	320	320	320	336	352	336	356	368	348	364	380
EFFICIENCY %	93.2	93.5	93.6	93.2	93.5	93.6	92.7	92.9	92.9	93.4	93.5	93.7	93.4	93.5	93.7	92.9	93.0	93.3
DAC-314FS																		
RATED CAPACITY(KVA)	380	380	380	390	390	390	404	404	404	404	445	456	475	475	500	488	500	519
RATED POWER(KW)	304	304	304	312	312	312	323	323	323	323	355.2	365	380	386	400	390	400	415
EFFICIENCY %	93.4	93.7	93.8	93.1	93.2	93.5	93.2	93.6	93.6	93.5	93.6	93.9	93.1	93.3	93.4	93.0	93.1	93.4
DAC-314G																		
RATED CAPACITY(KVA)	400	400	400	415	430	430	425	450	450	455	480	500	485	515	535	500	530	550
RATED POWER(KW)	320	320	320	332	344	344	340	360	360	364	384	400	388	412	428	400	424	440
EFFICIENCY %	93.2	93.4	93.6	92.9	93.0	93.2	92.8	92.8	93.1	93.4	93.4	93.7	93.1	93.1	93.4	92.9	92.9	93.2


Note: The generators have been designed for use in a maximum ambient temperature of 40°C and altitude less than 1000m above sea level
Other special voltage range can be met by YUKUN QIANGWEI company

DAC314 External Dimension

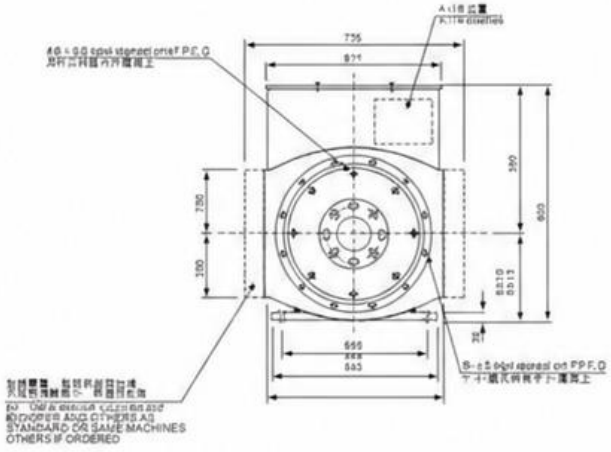

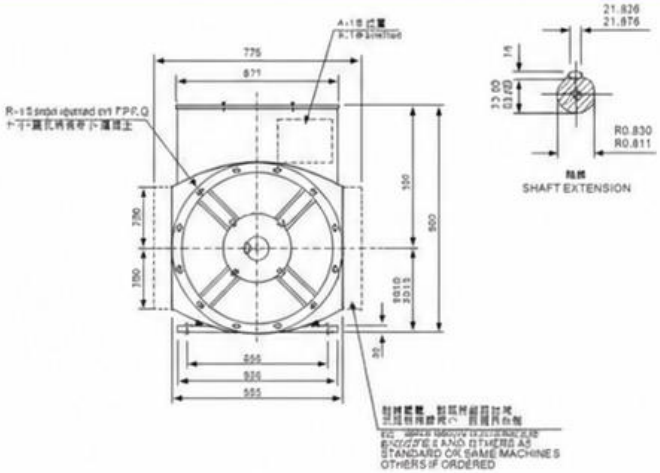

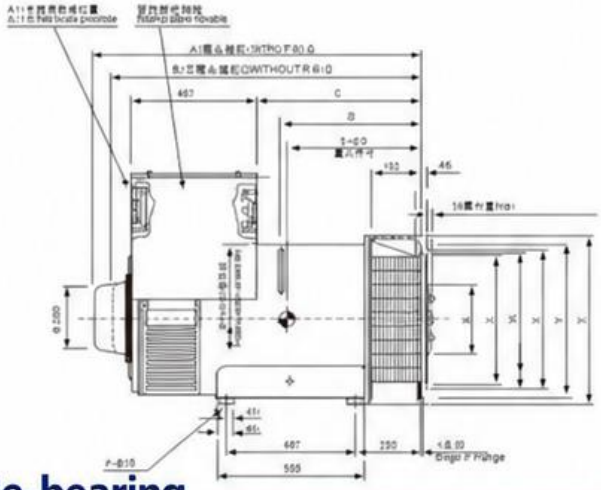

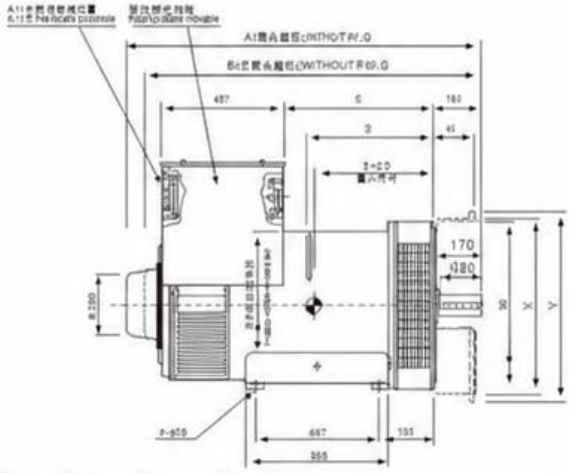

Single-bearing

DIMENSION					
TYPE	A	B	C	D	C of G
DAC-314C	1172	1101	584	493	463
DAC-314D	1172	1101	584	493	483
DAC-314ES	1172	1101	584	493	504
DAC-314E	1172	1101	584	493	504
DAC-314FS	1262	1191	674	583	530
DAC-314F	1262	1191	674	583	530

ADAPTOR						
S.A.E.No.	R	S	T	W	X	Y
0	12	14	679.5	626	647.6	711
1/2	12	14	619.1	569	584.1	680
1	12	12.7	530.2	496	511.1	617
2	12	11	466.7	432	447.6	617
3	12	11	428.6	394	409.5	617

COUPLING DISC						
S.A.E.No.	AN	AR	AS	AT	U	V
11.5	39.68	8	10.3	333.4	250	352.3
14	25.40	8	13.5	438.1	250	466.6
18	15.87	6	16.7	543.0	250	571.1

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-314C	850.5	910	130×77×99
DAC-314D	915.5	975	130×77×99
DAC-314ES	995.5	1055	130×77×99
DAC-314E	995.5	1055	130×77×99
DAC-314FS	1123.5	1183	139×77×99
DAC-314F	1123.5	1183	139×77×99

Double-bearing

DIMENSION					
TYPE	A	B	C	D	C of G
DAC-314C	1326	1255	554	463	433
DAC-314D	1326	1255	554	463	453
DAC-314ES	1326	1255	554	463	474
DAC-314E	1326	1255	554	463	474
DAC-314FS	1416	1345	644	553	500
DAC-314F	1416	1345	644	553	500

ADAPTOR							
S.A.E.No.	R	S	T	W	X	Y	E
0	16	14	679.5	632	647.6	711	150
1/2	12	14	619.1	569	584.1	648	150
1	12	12.7	530.2	496	511.1	553	150
12V135	12	14.0	625.0	590	604.9	660	158

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-314C	850.5	910	140×77×99
DAC-314D	915.5	975	140×77×99
DAC-314ES	995.5	1055	140×77×99
DAC-314E	995.5	1055	140×77×99
DAC-314FS	1123.5	1183	150×77×99
DAC-314F	1123.5	1183	150×77×99

All drawings and weight data for reference only, please contact YUKUN QIANGWEI company if there is any doubt

Batis

SERIES BRUSHLESS STAMFORD STYLE ALTERNATORS




354


Technical Data


DAC354																				
	50Hz(1500rpm)										60Hz(1800rpm)									
AMBIENT TEMP.	PRIME 40°C			PEAK 40°C				PEAK 27°C			PRIME 40°C			PEAK 40°C			PEAK 27°C		
TEMP. RISE	PRIME 125°C		PRIME 105°C	STANDBY150°C				STANDBY163°C			PRIME 125°C			STANDBY150°C			STANDBY163°C		
VOLTAGE	380	400	415	600	380	400	415	380	400	415	416	440	480	416	440	480	416	440	480
DAC-354C																			
RATED CAPACITY(KVA)	455.0	500.0	455.0	375.0	478.0	512.0	478.0	500.0	520.0	500.0	525.0	550.0	594.0	550.0	581.0	625.0	569.0	600.0	644.0
RATED POWER(KW)	364.0	400.0	364.0	300.0	382.0	410.0	382.0	400.0	416.0	400.0	420.0	440.0	475.0	440.0	464.8	500.0	455.2	480.0	515.2
EFFICIENCY %	94.0	93.8	94.4	94.5	93.8	93.7	94.2	93.6	93.6	94.1	94.0	94.1	94.2	93.8	93.9	94.0	93.6	93.7	93.9
DAC-354D																			
RATED CAPACITY(KVA)	500.0	550.0	550.0	425.0	515.0	575.0	515.0	550.0	590.0	550.0	575.0	594.0	644.0	588.0	625.0	675.0	606.0	644.0	694.0
RATED POWER(KW)	400.0	440.0	400	340.0	412.0	460.0	412.0	440.0	472.0	440.0	460.0	475.2	515.2	515.2	500.0	540.0	484.8	515.2	555.2
EFFICIENCY %	94.5	94.3	94.8	95.0	94.4	94.1	94.7	94.2	94.0	94.6	94.5	94.6	94.7	94.4	94.4	94.5	94.3	94.3	94.4
DAC-354E																			
RATED CAPACITY(KVA)	600.0	610.0	600	525.0	636.0	640.0	636.0	660.0	665.0	660.0	681.0	713.0	750.0	719.0	750.0	800.0	738.0	769.0	819.0
RATED POWER(KW)	480.0	488.0	480.0	420.0	509.0	512.0	509.0	528.0	532.0	528.0	544.8	570.4	600.0	575.2	600.0	640.0	590.4	615.2	655.2
EFFICIENCY %	94.7	94.9	95.0	95.1	94.5	94.7	94.8	94.3	94.5	94.8	94.8	94.9	95.0	94.6	94.7	94.8	94.5	94.6	94.8
DAC-354FS																			
RATED CAPACITY(KVA)	625.0	625.0	625.0	550.0	636.0	640.0	636.0	660.0	665.0	660.0	700.0	725.0	775.0	719.0	750.0	800.0	738.0	769.0	819.0
RATED POWER(KW)	500.0	500.0	500.0	440.0	509.0	512.0	509.0	528.0	532.0	528.0	560.0	580.0	620.0	575.0	600.0	640.0	590.0	615.0	655.0
EFFICIENCY %	95.0	95.1	95.2	95.3	94.4	94.6	96.6	94.2	94.4	94.6	95.0	95.1	95.1	94.5	94.4	94.7	94.4	94.6	94.6
DAC-354F																			
RATED CAPACITY(KVA)	670.0	670.0	670.0	600.0	710.0	710.0	710.0	738.0	738.0	738.0	738.0	775.0	825.0	781.0	819.0	875.0	806.0	844.0	906.0
RATED POWER(KW)	536.0	536.0	536.0	480.0	568.0	568.0	568.0	590.0	590.0	590.0	590.4	620.0	660.0	6258	6.5.2	700.0	644.8	675.2	724.8
EFFICIENCY %	94.8	95.0	95.1	95.2	94.6	94.8	94.9	94.4	94.6	94.8	95.0	95.0	95.1	94.8	94.9	94.7	94.7	94.8	94.9


Note: The generators have been designed for use in a maximum ambient temperature of 40°C and altitude less than 1000m above sea level
Other special voltage range can be met by YUKUN QIANGWEI company

DAC354 External Dimension

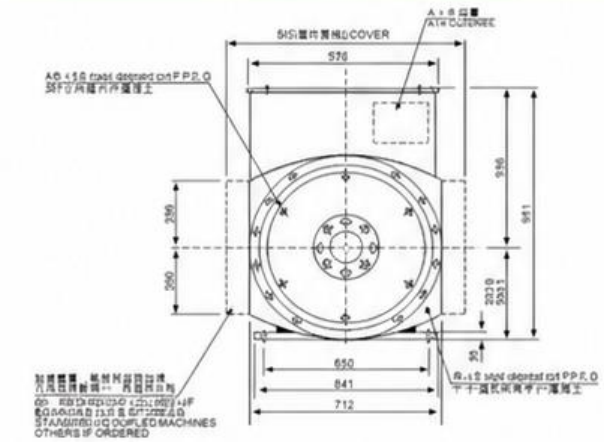

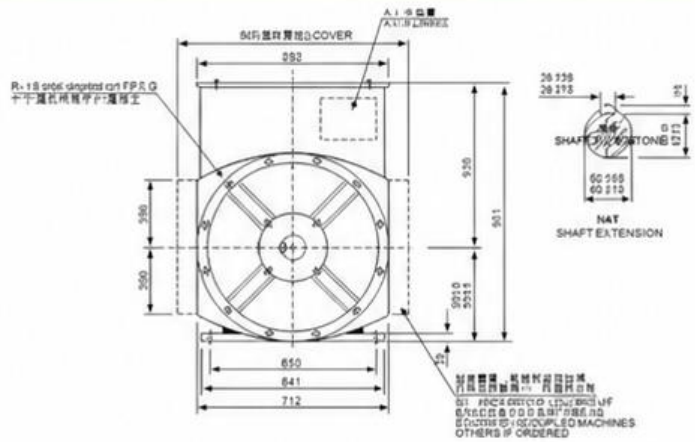

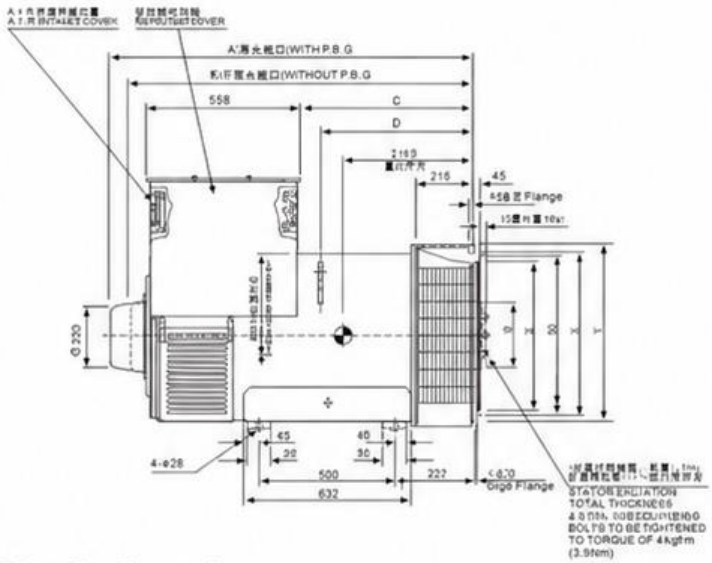

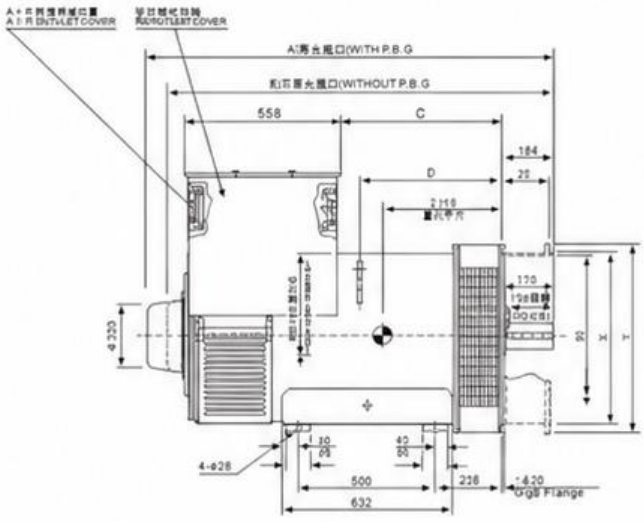

Single-bearing

DIMENSION					
TYPE	A	B	C	D	C of G
DAC-354C	1337	1266	642	568	555
DAC-354D	1337	1266	642	568	575
DAC-354E	1337	1266	642	568	595
DAC-354FS	1412	1341	717	643	620
DAC-354F	1412	1341	717	643	620

ADAPTOR						
S.A.E.No.	R	S	T	W	X	Y
00	12	14	850.9	772	787.3	882
0	12	14	679.5	632	647.6	711
1/2	12	14	619.1	568	584.1	700
1	12	12.7	530.2	496	511.1	700

COUPLING DISC						
S.A.E.No.	AN	AR	AS	AT	U	V
14	25.40	8	13.5	438.1	250	466.6
18	15.87	6	16.7	543.0	250	571.4
21	0	12	16.7	641.3	250	673.0

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-354C	1250	1350	146×84×100
DAC-354D	1358	1450	146×84×100
DAC-354E	1498	1598	146×84×100
DAC-354FS	1653	1753	154×84×100
DAC-354F	1653	1753	154×84×100

Double-bearing

DIMENSION					
TYPE	A	B	C	D	C of G
DAC-354C	1464	1393	585	511	498
DAC-354D	1464	1393	585	511	518
DAC-354E	1464	1393	585	511	538
DAC-354FS	1539	1468	660	586	565
DAC-354F	1539	1468	660	586	565

ADAPTOR							
S.A.E.No.	R	S	T	W	X	Y	E
00	16	14	850.9	772	882		170
0	16	14	679.5	632	711		170
1/2	12	14	619.1	569	648		150
1	12	12.7	530.2	496	553		170
12V150	12	14.5	625.0	589	660		162

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-354C	1250	1350	154×84×100
DAC-354D	1358	1450	154×84×100
DAC-354E	1498	1598	154×84×100
DAC-354FS	1653	1753	162×84×100
DAC-354F	1653	1753	162×84×100

All drawings and weight data for reference only, please contact YUKUN QIANGWEI company if there is any doubt

Batis

SERIES BRUSHLESS STAMFORD STYLE ALTERNATORS




404


Technical Data


DAC404																				
	50Hz(1500rpm)										60Hz(1800rpm)									
AMBIENT TEMP.	PRIME 40°C			PEAK 40°C				PEAK 27°C			PRIME 40°C			PEAK 40°C			PEAK 27°C		
TEMP. RISE	PRIME 125°C		PRIME 105°C	STANDBY150°C				STANDBY163°C			PRIME 125°C			STANDBY150°C			STANDBY163°C		
VOLTAGE	380	400	415	600	380	400	415	380	400	415	416	440	480	416	440	480	416	440	480
DAC-404B																			
RATED CAPACITY(KVA)	710	750	750	687.5	730	775	775	745	790	790	812.5	855	938	840	889	970	849	898	980
RATED POWER(KW)	568	600	600	550	584	620	620	596	634	632	650	684	750	672	711	776	679	718	784
EFFICIENCY %	93.2	93.3	93.5	93.5	93.1	93.1	93.3	93.0	93.2	93.3	92.8	93.0	93.1	92.8	93.0	93.1	92.8	92.9	93.4
DAC-404C																			
RATED CAPACITY(KVA)	760	800	800	735	785	825	825	800	840	840	865	966	1000	897	948	1035	905	958	1045
RATED POWER(KW)	608	640	640	588	628	660	660	640	670	672	692	733	800	718	758	828	724	766	836
EFFICIENCY %	93.6	93.6	93.8	93.9	93.4	93.5	93.7	93.4	93.5	93.7	93.2	93.4	93.5	93.2	93.4	93.5	93.2	93.3	93.4
DAC-404D																			
RATED CAPACITY(KVA)	865	910	910	835	890	938	938	910	955	955	986	1043	1138	1018	1077	1175	1030	1090	1190
RATED POWER(KW)	692	728	728	668	712	750	750	728	764	764	789	834	910	814	862	940.0	824	827	952
EFFICIENCY %	93.5	93.5	93.7	93.9	93.3	93.4	93.6	93.3	93.4	93.6	93.1	93.3	93.4	93.1	93.3	93.4	93.1	93.2	93.3
DAC-404E																			
RATED CAPACITY(KVA)	950	1000	1000	912.5	980	1030	1030	1000	1050	1050	1083	1145	1250	1118	1180	1290	1130	1195	1305
RATED POWER(KW)	760	800	800	730	784	824	824	800	840	840	866	916	1000	894	944	1032	904	956	1044
EFFICIENCY %	94.2	94.2	94.4	94.3	94.1	94.1	94.3	94.1	94.2	94.3	93.9	94.0	94.0	93.9	94.0	94.1	93.9	94.0	94.0
DAC-404F																			
RATED CAPACITY(KVA)	1090	1130	1130	1037.5	1125	1165	1165	1145	1185	1185	1204	1274	1390	1243	1315	1435	1257	1329	1450
RATED POWER(KW)	872	901	904	830.0	900	932	932	916	948	948	963	1019	1112	994	1052	1148	1006	1063	1160
EFFICIENCY %	94.6	94.7	94.8	94.7	94.5	94.6	94.7	94.6	94.7	94.8	94.5	94.6	94.6	94.5	94.6	94.6	94.5	94.5	94.5
DAC-404G																			
RATED CAPACITY(KVA)	1190	1250	1250	1150	1225	1288	1288	1250	1313	1313	1310	1386	1513	1354	1422	1563	1369	1448	1580
RATED POWER(KW)	952	1000	1000	920	980	1030	1030	1000	1050	1050	1048	1109	1210	1083	1146	1250.4	1095	1158	1264
EFFICIENCY %	94.8	94.9	95.0	94.9	94.8	94.8	94.9	94.9	94.9	95.0	94.8	94.9	94.8	94.8	94.9	94.8	94.8	94.8	94.7


Note: The generators have been designed for use in a maximum ambient temperature of 40°C and altitude less than 1000m above sea level
Other special voltage range can be met by YUKUN QIANGWEI company

DAC404 External Dimension

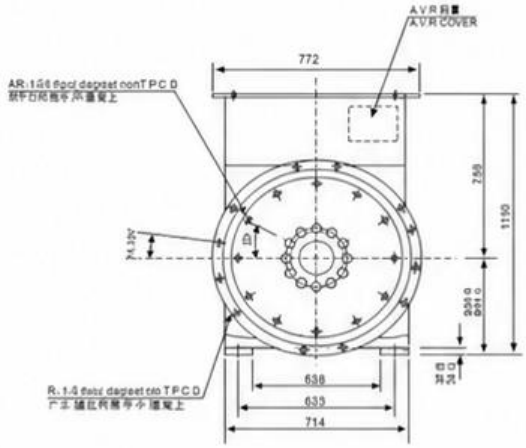

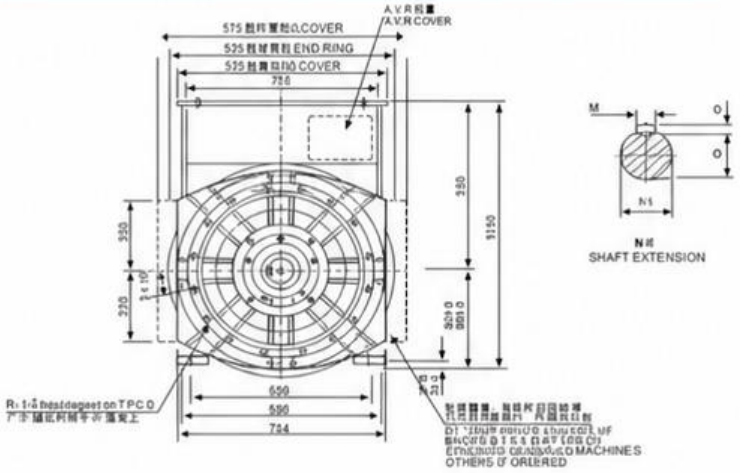

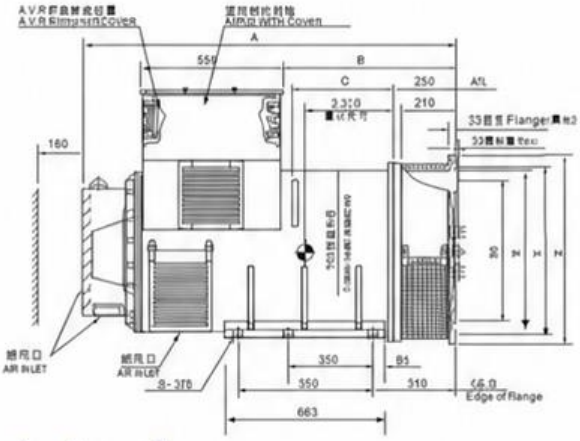

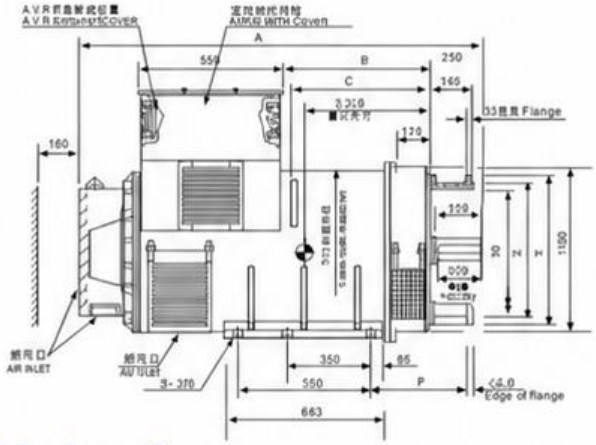

Single-bearing

DIMENSION				
TYPE	A	B	C	C of G
DAC-404B	1578	726	405	587
DAC-404C	1578	726	405	591
DAC-404D	1578	726	405	597
DAC-404E	1578	726	405	607
DAC-404F	1578	726	405	625
DAC-404G	1679	826	464	735

ADAPTOR							
S.A.E.No.	X	Y	Z	N	R	S	T
00	772	787.3	883	16	16	14	851.0
0	632	647.6	810	16	16	14	679.5
0.5	559	584.1	810	16	16	14	619.1

COUPLING DISC					
S.A.E.No.	W	AN	AR	AS	AT
24	733.3	0	12	20.7	692
21	673.02	0	12	16.7	641.3
18	571.42	15.87	6	16.7	543.0
14	466.64	25.40	8	13.5	438.1

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-404B	1950	2020	168×95×130
DAC-404C	1970	2040	168×95×130
DAC-404D	2030	2100	168×95×130
DAC-404E	2190	2260	168×95×130
DAC-404F	2420	2490	168×95×130
DAC-404G	2750	2820	178×95×130

Double-bearing

DIMENSION					
TYPE	A	B	C	F	C of G
DAC-404B	1718	640	570	446	587
DAC-404C	1718	640	570	446	591
DAC-404D	1718	640	570	446	597
DAC-404E	1718	640	570	446	607
DAC-404F	1718	640	570	446	625
DAC-404G	1904	826	716	531	753


ADAPTOR							
S.A.E.No.	W	X	Y	N	R	S	T
00	768	787.3	882	16		14	851.0
0	621	647.6	711	16		14	679.5
0.5	568	584.1	648	12		14	619.1

COUPLING DISC				
BCDEF	M	N	O	P
G	27.978	110.035	100.0	16
	27.926	110.013	99.8	
	31.974	125.040	114.0	18
	31.912	125.015	113.8	

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE(CM)
DAC-404B	1960	2030	186×95×130
DAC-404C	1980	2050	186×95×130
DAC-404D	2040	2110	186×95×130
DAC-404E	2210	2280	186×95×130
DAC-404F	2430	2500	186×95×130
DAC-404G	2760	2830	206×95×130

Batis

SERIES BRUSHLESS STAMFORD STYLE ALTERNATORS

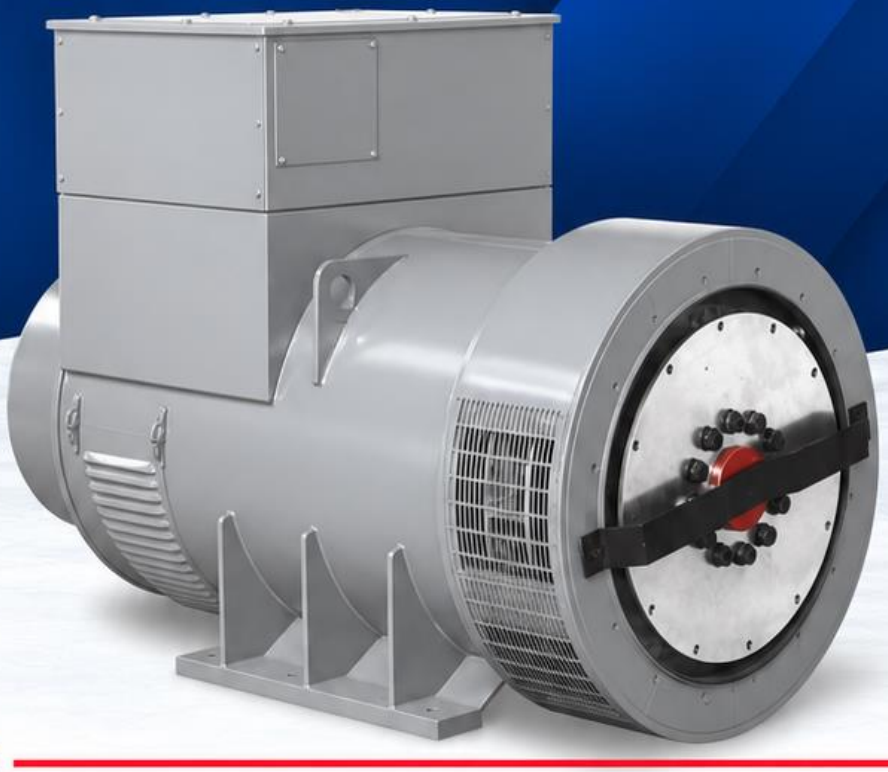


504


Technical Data


INDUSTRIAL GENERATORS								
FREQUENCY		400V~50Hz 1500rpm			600V~60Hz	60Hz 1800rpm		
PRIME		PRIME40°C	PRIME40°C	PRIME27°C	PRIME40°C	PRIME40°C	PRIME40°C	PRIME27°C
AMBIEN TEMP		PRIME125°C	PRIME150°C	PRIME163°C	PRIME105°C	PRIME125°C	PRIME150°C	PRIME163°C
DAC-504A	KVA	1260	1315	1350	1125	1525	1585	1630
	kW	1008	1052	1080	900	1220	1268	1304
	Eff	94.8	94.6	94.5	94.9	95.0	94.9	94.8
DAC-504B	KVA	1400	1460	1500	1237.5	1690	1760	1810
	kW	1120	1168	1200	990	1352	1408	1448
	Eff	95.3	95.2	95.1	95.1	95.5	95.4	95.3
DAC-504C	KVA	1550	1615	1660	1375	1890	1970	2025
	kW	1240	1292	1328	1100	1512	1576	1620
	Eff	95.7	95.6	95.5	95.3	95.9	95.8	95.7
DAC-504D	KVA	1650	1720	1770	N/A	2015	2100	2160
	kW	1320	1376	1416	N/A	1612	1680	1728
	Eff	96.2	96.1	96.0	N/A	96.3	96.2	96.1
DAC-504E	KVA	1900	1980	2035	1662.5	2300	2395	2465
	kW	1520	1584	1628	1330	1840	1916	1972
	Eff	96.2	96.1	96.0	95.6	96.3	96.3	96.5
DAC-504F	KVA	2080	2170	2250	1787.5	2600	2705	2785
	kW	1664	1736	1800	1430	2080	2164	2228
	Eff	96.4	96.3	96.2	95.6	96.5	96.4	96.3
DAC-504G	KVA	2200	2295	2360	1900	2750	2860	2945
	kW	1760	1836	1888	1520	220	2288	2356
	Eff	96.0	95.9	95.9	95.7	96.1	96.0	95.9


Note: The generators have been designed for use in a maximum ambient temperature of 40°C and altitude less than 1000m above sea level
Other special voltage range can be met by YUKUN QIANGWEI company

DAC-504 External Dimension

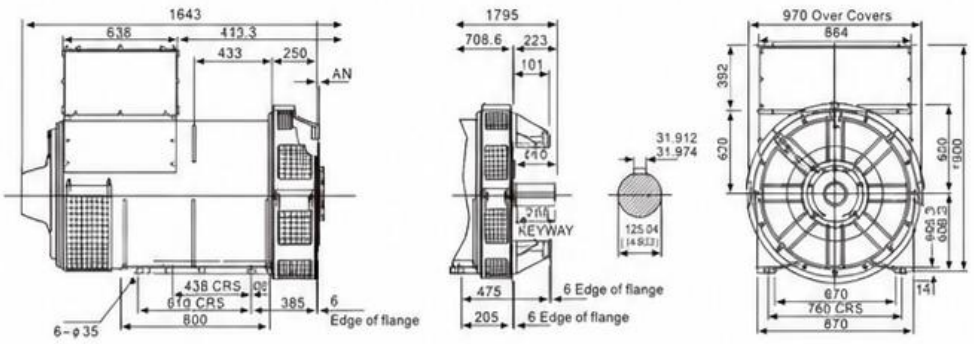

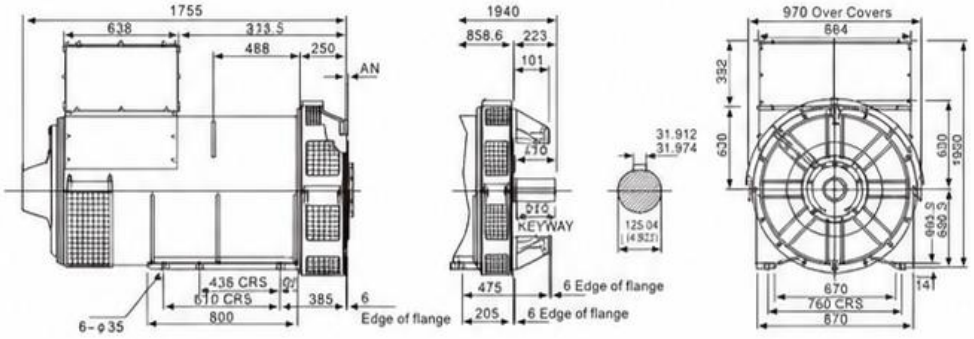

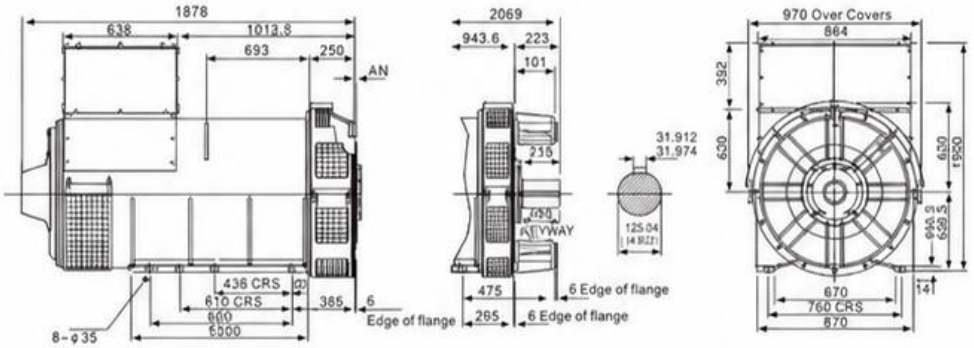

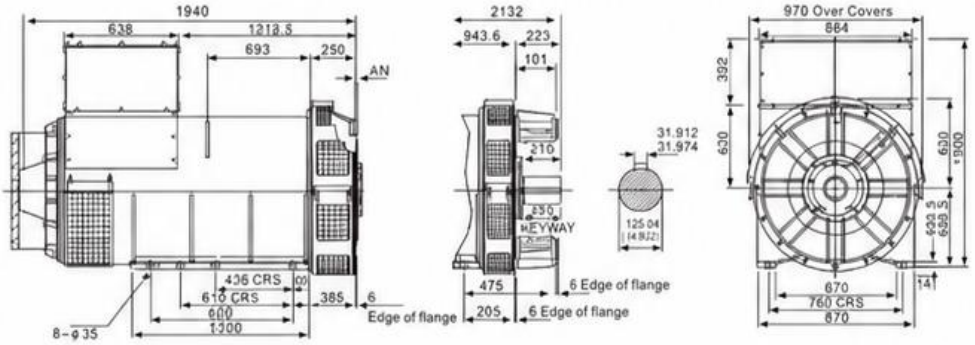

DAC-504A,B&C

Coupling disc	'AN'
SAE NO.18	15.7
SAE NO.21	0
SAE NO.24	0

Single point of transition joint sleeve

SAE NO.0
SAE NO.00

Two point of transition joint sleeve

SAE NO.0
SAE NO.00

DAC-504E&D

Coupling disc	'AN'
SAE NO.18	15.7
SAE NO.21	0
SAE NO.24	0

Single point of transition joint sleeve

SAE NO.0
SAE NO.00

Two point of transition joint sleeve

SAE NO.0
SAE NO.00

DAC-504F

Coupling disc	'AN'
SAE NO.18	15.7
SAE NO.21	0
SAE NO.24	0

Single point of transition joint sleeve

SAE NO.0
SAE NO.00

Two point of transition joint sleeve

SAE NO.0
SAE NO.00

DAC-504G

Coupling disc	'AN'
SAE NO.18	15.7
SAE NO.21	0
SAE NO.24	0

Single point of transition joint sleeve

SAE NO.0
SAE NO.00

Two point of transition joint sleeve

SAE NO.0
SAE NO.00

Single-bearing

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE (cm)
DAC-504A	2760	2833	194×105×154
DAC-504B	2760	2833	194×105×154
DAC-504C	3018	3091	194×105×154
DAC-504D	3318	3391	216×105×154
DAC-504E	3556	3629	216×105×154
DAC-504F	3840	3913	216×105×154
DAC-504G	4054	4127	216×105×154

Double-bearing

TRANSPORTATION DATA			
TYPE	N.W(kg)	G.W(kg)	PACKAGE SIZE (cm)
DAC-504A	2710	2779	194×105×154
DAC-504B	2710	2779	194×105×154
DAC-504C	2967	3036	194×105×154
DAC-504D	3267	3336	216×105×154
DAC-504E	3506	3575	216×105×154
DAC-504F	3807	3876	216×105×154
DAC-504G	4022	4091	216×105×154