



کاتالوگ جامع بلوتی

پاور استیشن های قابل حمل و پرتابل

مدل Premium 200V2



درباره کالاصنعتی



گروه کالاصنعتی با هدف تعریف چارچوبی حرفه‌ای و راهبردی برای پاسخ به نیازهای بنیادین صنایع، کارخانجات و واحدهای تولیدی کشور شکل گرفته است. کالاصنعتی امروز فراتر از یک ساختار فروشگاهی سنتی عمل می‌کند و به‌عنوان یک زنجیره‌ی تأمین یکپارچه و تخصصی B2B در صنعت ایران شناخته می‌شود؛ مجموعه‌ای که بر پایه‌ی پیوند میان ظرفیت‌های بازرگانی و نیازمندی‌های واقعی بدنه‌ی اجرایی صنعت بنا شده است

اصل بنیادین عرضه و سامان‌دهی تأمین منطق کاری کالاصنعتی بر این اصل استوار است که تجهیزات

و کالاهای سنگین صنعتی باید در کوتاه‌ترین زمان ممکن، با اصالت تضمین‌شده و به‌صورت مستقیم از سوی تولیدکنندگان و بازرگانان معتبر، به خطوط تولید کارخانجات کشور برسند. کالاصنعتی با اتکا به زیرساخت دیجیتال و زنجیره‌ی لجستیک تخصصی خود، نقشی محوری در این سامان‌دهی و مدیریت یکپارچه‌ی زنجیره‌ی تأمین بر عهده دارد؛ فرایندی که نتیجه‌ی مستقیم آن، ساده‌سازی خریدهای پیچیده‌ی صنعتی، کاهش توقف و خطا در تأمین، و در نهایت افزایش بهره‌وری صنایع کشور است

وجوه تمایز و ارزش‌های ما

راهکارهای مهندسی و مشاوره‌ی فنی جامع: ارزش واقعی تأمین تجهیزات صنعتی، فراتر از تحویل صرف کالا، در ارائه‌ی مشاوره‌ی دقیق فنی-مهندسی و متناسب با شرایط خطوط تولید نهفته است. کارشناسان متخصص ما با ارائه‌ی دیتاشیت و نقد و بررسی فنی، خریدی آگاهانه و پایدار را برای مدیران فنی و تدارکاتی رقم می‌زنند؛ چرا که آموزش و اطلاع‌رسانی درست را بخشی جدایی‌ناپذیر از تأمین مسئولانه می‌دانیم

تأمین مسئولانه و روابط پایدار: همکاری مستمر با صنایع بزرگ فولاد، سیمان، پتروشیمی و مجموعه‌های دستگاه‌سازی سراسر کشور، حاصل تعهد ما به تأمین مسئولانه، تضمین اصالت و پایش دقیق کالا تا لحظه‌ی تحویل به خط تولید است

سبد جامع محصولات و دیپارتمان‌های تخصصی کالاصنعتی

گروه کالاصنعتی با هدف تعریف چارچوبی حرفه‌ای و راهبردی برای پاسخ به نیازهای بنیادین صنایع، کارخانجات و واحدهای تولیدی کشور شکل گرفته است. کالاصنعتی امروز فراتر از یک ساختار فروشگاهی سنتی عمل می‌کند و به‌عنوان یک زنجیره‌ی تأمین یکپارچه و تخصصی B2B در صنعت ایران شناخته می‌شود؛ مجموعه‌ای که بر پایه‌ی پیوند میان ظرفیت‌های بازرگانی و نیازمندی‌های واقعی بدنه‌ی اجرایی صنعت بنا شده است

اصل بنیادین عرضه و سامان‌دهی تأمین

منطق کاری کالاصنعتی بر این اصل استوار است که تجهیزات و کالاهای سنگین صنعتی باید در کوتاه‌ترین زمان ممکن، با اصالت تضمین‌شده و به‌صورت مستقیم از سوی تولیدکنندگان و بازرگانان معتبر، به خطوط تولید کارخانجات کشور برسند. کالاصنعتی با اتکا به زیرساخت دیجیتال و زنجیره‌ی لجستیک تخصصی خود، نقشی محوری در این سامان‌دهی و مدیریت یکپارچه‌ی زنجیره‌ی تأمین بر عهده دارد؛ فرایندی که نتیجه‌ی مستقیم آن، ساده‌سازی خریدهای پیچیده‌ی صنعتی، کاهش توقف و خطا در تأمین، و در نهایت افزایش بهره‌وری صنایع کشور است

وجوه تمایز و ارزش‌های ما

راهکارهای مهندسی و مشاوره‌ی فنی جامع: ارزش واقعی تأمین تجهیزات صنعتی، فراتر از تحویل صرف کالا، در ارائه‌ی مشاوره‌ی دقیق فنی-مهندسی و متناسب با شرایط خطوط تولید نهفته است. کارشناسان متخصص ما با ارائه‌ی دیتاشیت و نقد و بررسی فنی، خریدی آگاهانه و پایدار را برای مدیران فنی و تدارکاتی رقم می‌زنند؛ چرا که آموزش و اطلاع‌رسانی درست را بخشی جدایی‌ناپذیر از تأمین مسئولانه می‌دانیم

تأمین مسئولانه و روابط پایدار: همکاری مستمر با صنایع بزرگ فولاد، سیمان، پتروشیمی و مجموعه‌های دستگاه‌سازی سراسر کشور، حاصل تعهد ما به تأمین مسئولانه، تضمین اصالت و پایش دقیق کالا تا لحظه‌ی تحویل به خط تولید است

کالاصنعتی با پوشش گسترده‌ی نیازهای صنعت، سبد کالایی و خدمات مهندسی خود را در قالب هشت دیپارتمان تخصصی عرضه می‌کند

1. دیپارتمان تخصصی الکتروموتور: تأمین و توزیع جامع انواع الکتروموتورهای صنعتی و خانگی؛ شامل الکتروموتورهای تک‌فاز و سه‌فاز (پوسته‌ی آلومینیومی و چدنی)، ضدانفجار، ترمزدار، تخت، موتورهای کولری و نسل جدید موتورهای کم‌مصرف و هوشمند (CDLB)، به‌همراه کلیه‌ی لوازم جانبی

2. دیپارتمان تخصصی گیربکس‌های صنعتی: ارائه‌ی طیف وسیعی از تجهیزات انتقال قدرت؛ شامل گیربکس‌های حلزونی، هلیکال (شافت مستقیم)، بول‌هلیکال، چندمحوره و روسی، گیربکس‌های سنگین اکسترودر، بالابر، جک‌اسکرو، کتابی و انواع کاهنده‌های سرعت خطوط تولید

3. دیپارتمان تخصصی پمپ و تجهیزات سیالات: پاسخگویی جامع به مصارف خانگی، کشاورزی و صنعتی؛ با ارائه‌ی پمپ‌های خانگی، کشاورزی، استخری، دنده‌ای، لجن‌کش، کفکش، سیرکولاتور، جتی، بشقابی، شناور، وکیوم، کارواش، دوزینگ‌پمپ (تزریق)، مونوپمپ، پمپ‌های مگنتی، دیافراگمی، ساید چنل و انواع موتورپمپ‌های دیزلی و بنزینی

4. دپارتمان تجهیزات برق صنعتی و اتوماسیون: مدیریت و هوشمندسازی خطوط صنعتی؛ شامل انواع اینورترهای تک فاز و سه فاز (درایوهای صنعتی و آسانسوری)، سیستم‌های کنترلی CLP، تجهیزات فرمان و کلیدزنی، کنتاکتورها و انواع موتور و بیرره‌های استاندارد و فلانچ‌دار
5. دپارتمان تخصصی انرژی: تأمین راهکارها و تجهیزات جامع تبدیل و ذخیره‌سازی انرژی؛ شامل انواع موتور برق، ژنراتورهای صنعتی، باتری‌های تخصصی، سیستم‌های برق اضطراری و یوپی‌اس (SPU) و توسعه‌ی راهکارهای نوین انرژی خورشیدی (سولار)
6. دپارتمان تخصصی فن و تهویه صنعتی: پشتیبانی، طراحی و ارائه‌ی دامنه‌ی گسترده‌ای از سیستم‌های تهویه و جریان هوا؛ شامل انواع فن‌های صنعتی، هواکش‌ها، دمنده‌ها، مکندوها و تجهیزات تخصصی تهویه مطبوع کارگاهی و کارخانجاتی
7. دپارتمان قطعات صنعتی و قطعات یدکی: تأمین قطعات استراتژیک خطوط تولید؛ شامل انواع بلبرینگ‌های شیار عمیق، خودتنظیم و کف‌گرد، رولبرینگ‌های کروی، انواع یاتاقان‌های صنعتی و کوپلینگ‌های تخصصی (دنده‌ای، لقمه‌ای، دیسکی، میل‌پینی و xepue-N)
8. دپارتمان تخصصی ابزارآلات صنعتی: تأمین و تجهیز جامع کارگاه‌ها و واحدهای صنعتی با ارائه‌ی دامنه‌ی گسترده‌ای از ابزارآلات دستی، برقی، بادی و کارگاهی تخصصی؛ فراتر از مصارف عمومی و ابزارهای شارژی، جهت پشتیبانی کامل فرایندهای ساخت، مونتاژ، تعمیرات و نگهداری (ORM) در خطوط تولید





Premium 200 V2

Portable Power Station


User Manual v1.1

Important Instructions

For the best experience and performance, fully charge your unit and update to the latest firmware before first use. See the appendix "Update Firmware via BLUETTI App" for guidance.

Read and understand this manual before use and keep it handy for future reference.



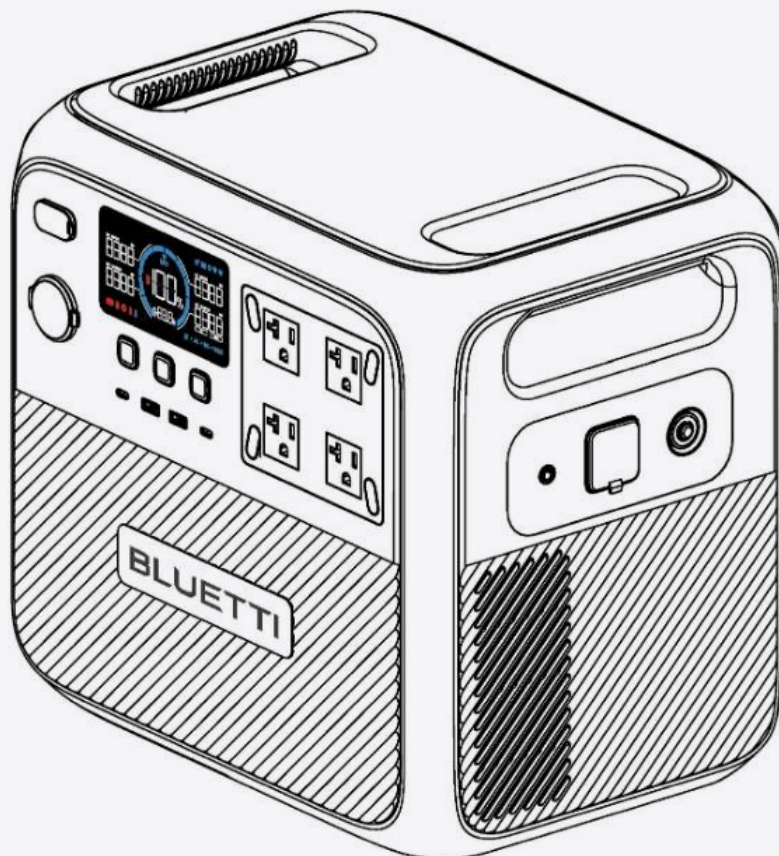

Tips

1. Charge the unit before first use.
2. Do not use solar panels with open circuit voltage higher than 60V. Solar input voltage range for the unit is 12V-60V.
3. If the unit's SoC falls below 5%, please recharge the unit in time. If the SoC drops to 0, power off the unit and charge it for at least 30 minutes before restarting.
4. The unit is for off-grid use only. Do not connect its AC output to the grid.
5. If not used for more than 3 months, charge the unit to 40%-60% SoC and store it with the power off. For optimum battery life, discharge and charge the unit every 3 months.

Legal Information

Notice

BLUETTI's products and services are subject to the terms and conditions agreed upon during purchase. Some aspects described in this manual may not be available under your purchase contract. Unless otherwise specified in the contract, BLUETTI makes no express or implied representations or warranties regarding the contents of this manual.

The contents of this manual are subject to change without notice. Please obtain the latest version from BLUETTI official website.

If you have any questions or concerns about this manual, please contact BLUETTI support for further assistance.

Contents

1	Safety Information	05
2	What's in the Box	08
3	Get to Know Your Premium 200 V2	09
3.1	Premium 200 V2 Overview	09
3.2	Display Screen	10
4	Use Your Premium 200 V2	11
4.1	Power On/Off	11
4.2	Charging	12
4.3	Power Your Devices	14
5	Configure Your Premium 200 V2	15
5.1	Setting Mode	15
5.2	AC Charging Mode	16
5.3	Power Lifting Mode	16
5.4	ECO Mode	16
6	View Device Information	17
7	UPS Feature	17
8	Grid Self-adaption Mode	19
9	Adjust Grid Input Current	20
10	System Switch Recovery	20
11	Maintenance and Care	21
12	Specifications	22
13	Troubleshooting & FAQ	23
	Appendix	24
	Compliance	27

1. Safety Information

INSTRUCTIONS PERTAINING TO RISK OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS

WARNING - When using the product, basic precautions should always be followed, including the following:

- Read all the instructions before using the product.
- Handle the product with care, avoiding drops, violent impacts, or tilting.
- To reduce the risk of injury, close supervision is necessary when the product is used near children.
- Do not put fingers or foreign objects into the product's ports.
- Use of an attachment not recommended or sold by the manufacturer may result in a risk of fire, electric shock, or injury to persons.
- Do not move the product during operation to avoid poor connections.
- Do not expose the battery to high temperatures, as this may cause an explosion or leakage of flammable liquids or gases.
- Do not use the product in the rain or high humidity environments.
- Do not use a battery pack or appliance that is damaged or modified. Damaged or modified batteries may exhibit unpredictable behavior resulting in fire, explosion or risk of injury.
- Handle the product with caution in low air pressure environments to prevent explosions or leaks.
- Charge the product in a well-ventilated area.
- Under abusive conditions, liquid may be ejected from the product's battery; avoid contact. If contact accidentally occurs, flush with water. If liquid contacts eyes, additionally seek medical help. Battery liquid may cause irritation or burns.
- In case of fire, use a dry powder fire extinguisher appropriate for the product.
- Never dispose of the product's battery in fire, hot ovens, or by cutting it.
- Do not operate the product with a damaged cord, plug, or output cable.
- To reduce the risk of damage to the electric plug and cord, pull the plug rather than the cord when disconnecting the product.
- Do not disassemble the product; take it to a qualified service person if service or repair is required. Incorrect reassembly may result in a risk of fire or electric shock.
- Unplug the product before any servicing to prevent electric shock.
- **WARNING - RISK OF EXPLOSIVE GASES.** Follow these instructions and those published by manufacturer of any equipment you intend to use in vicinity of the product to reduce risk of battery explosion.

- **WARNING - RISK OF ELECTRIC SHOCK.** Never use the product to power tools to cut or access live parts, wirings or materials containing them, such as building walls.
- Have servicing performed by a qualified repair person using only identical replacement parts. This will ensure that the safety of the product is maintained.
-   The symbols on unit and its accessories are intended to remind you to read the instructions in the literature accompanying the product before operation and maintenance.
- The socket-outlet should be installed near the product and easily accessible for safety purposes.
- **Caution:** The output of USB-C port is classified as PS3 according to standard IEC 62368-1. Consider implementing safeguards against fire, such as a fire enclosure, for connected equipment or accessories.

Attention



Not permitted on aircraft.

- When charging with lead-acid batteries or using the product to charge them, follow these safety precautions:
 - a. Wear eye and clothing protection; do not touch eyes when working near a battery.
 - b. No smoking, sparks, or flames near the battery or engine.
 - c. Avoid dropping metal tools onto the battery to prevent sparks or short circuits.

Disposal and Recycling

1. Take old electronic components and batteries to designated recycling centers. This prevents improper disposal and supports material recovery.
2. If possible, fully discharge the batteries and then place them in designated battery recycling boxes. The batteries in this product contain hazardous chemicals. Do not dispose of them with regular household waste. Please follow local laws and regulations for proper battery disposal.
3. If a battery cannot fully discharge due to product malfunction, do not place it in the battery recycling box. Instead, contact a professional battery recycling organization for safe handling.

Grounding Instructions (For AC charging only)


- This product must be grounded when connected to the grid. If this product should malfunction, grounding provides a path of least resistance for electric current to reduce the risk of electric shock.
- The product is equipped with an AC charging cable having an equipment grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.
- **WARNING** - Improper connection of the grounding conductor can result in a risk of electric shock. Check with a qualified electrician if you're in doubt as to whether the product is properly grounded. Don't modify the plug provided with the product – if it'll not fit the outlet, have a proper outlet installed by a qualified electrician.

SAVE THESE INSTRUCTIONS

2. What's in the Box



Premium 200 V2
Portable Power Station



AC Charging Cable
(70.87in / 1.8m)



Grounding Screw




Documentation

The following accessories are not included.


Please purchase optional accessories below at <https://www.bluettipower.com>

Note: All images are for reference only.


Optional Accessories



Solar Charging Cable
MC4 - XT60
(59.06in / 1.5m)




Car Charging Cable
Cigarette Lighter Plug - XT60 (F)
(28.35in / 0.72m)



12V DC Power Cable*
Cigarette Lighter Plug - DC5521 (F)
(28.35in / 0.72m)



Lead-acid Battery Charging Cable
Cigarette Lighter Plug - Clamps
(19.69in / 0.5m)




USB-C to USB-C Cable
(78.74in / 2m)

* Used to charge devices with DC5521 input using Premium 200 V2's cigarette lighter port.

3. Get to Know Your Premium 200 V2

3.1 Premium 200 V2 Overview

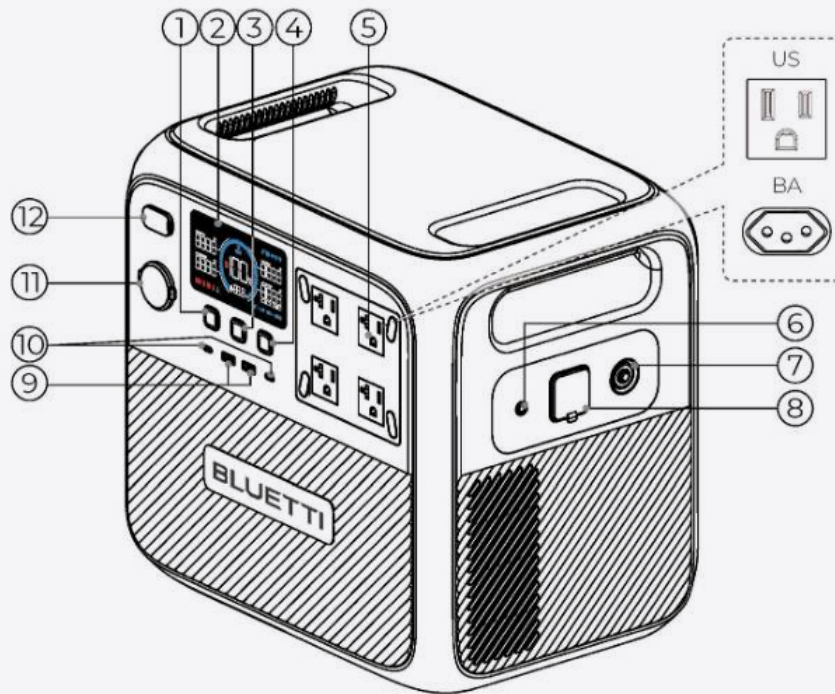

① DC Power Button

② LCD Display

③ Power Button

④ AC Power Button

⑤ AC Outlet

⑥ Grounding Terminal*

⑦ Circuit Breaker

⑧ AC Input

⑨ USB-A Ports


⑩ USB-C Ports

⑪ Cigarette Lighter Port (Car Outlet)

⑫ DC Input

* Used for grounding when powering certain equipment. For assistance, contact us or seek guidance from the appendix "Grounding Guidelines".

3.2 Display Screen

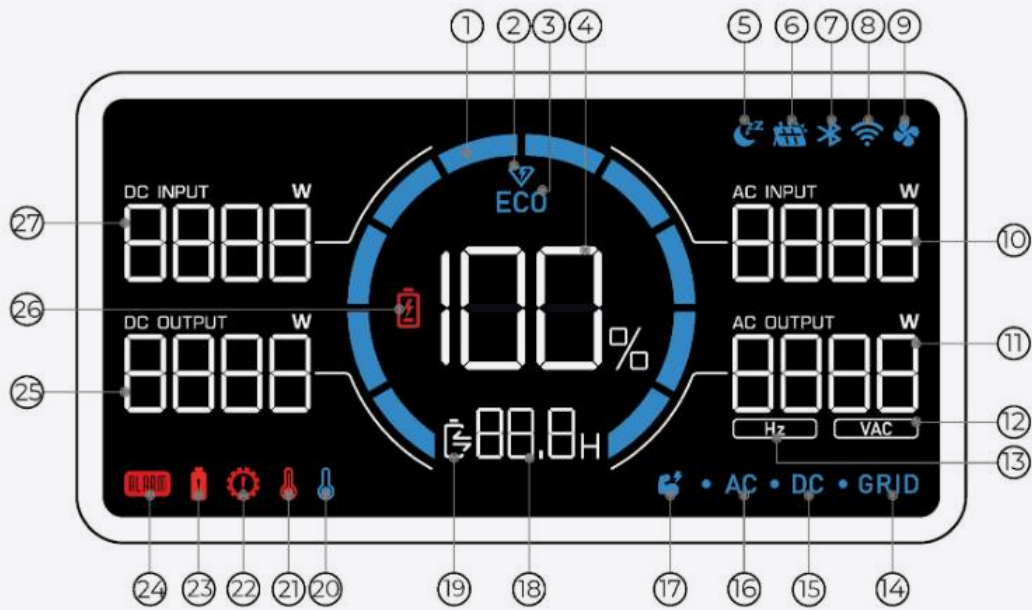

- | | | |
|-------------------------|----------------------|--------------------|
| ① Progress Bar* | ⑩ AC Input Power | ⑲ Battery Status* |
| ② Turbo Charging | ⑪ AC Output Power | ⑳ Low Temperature |
| ③ ECO Mode | ⑫ Inverter Voltage | ㉑ High Temperature |
| ④ State of Charge (SoC) | ⑬ Inverter Frequency | ㉒ Overload |
| ⑤ Silent Charging | ⑭ AC Input* | ㉓ Overcurrent |
| ⑥ DC Input* | ⑮ DC Output* | ㉔ System Fault |
| ⑦ Bluetooth Connection | ⑯ AC Output* | ㉕ DC Output Power |
| ⑧ WiFi Connection | ⑰ Power Lifting Mode | ㉖ Low Battery* |
| ⑨ Fan* | ⑱ Remaining Time* | ㉗ DC Input Power |

* Progress Bar: Fill up while charging and deplete while discharging.

DC Input: Charges from solar panels, cars, or lead-acid batteries.

Fan: Flashing for abnormal fan operation.

AC Input: Charges from a wall outlet or generator.

DC/AC Output: Output is active.


Remaining Time: Remaining charging or discharging time.

Battery Status:  for charging,  for discharging.

Low Battery: SoC below 5%. CHARGE THE UNIT IN TIME.

4. Use Your Premium 200 V2

4.1 Power On/Off

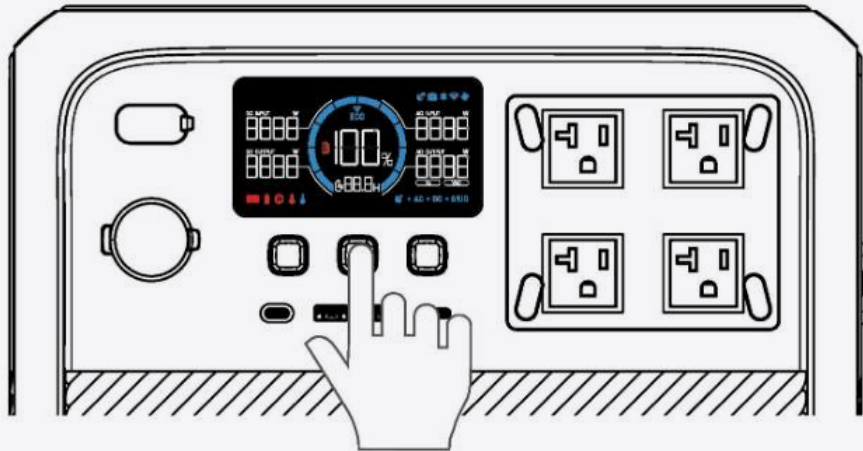

Power On

Press the power button; the lit button indicates that the Premium 200 V2 is on standby.

Power Off

Long press the power button for about 2 seconds to turn off the unit.

AC On/Off

Press AC power button when Premium 200 V2 is on.

DC On/Off

Press DC power button when Premium 200 V2 is on.

Note:


- When Premium 200 V2 is on, press the power button to turn on/off the display.
- If there is no DC or AC output for over one minute, the Premium 200 V2 automatically powers off.
- By default, the display turns off after one minute of inactivity. You can adjust the sleep time via the app.

4.2 Charging

AC Charging (Wall Outlet)

Plug the Premium 200 V2 into a standard wall outlet. It stops charging when fully charged to prevent overcharging. For quicker charging, enable Turbo Charging in the app. This lets the Premium 200 V2 reach 80% charge in approximately 1 hour and 100% in about 1.4 hours, at an ambient temperature of 25°C (77°F).

Note: Do not plug the unit's AC charging cable into its own AC outlets, as this could damage the connected device.

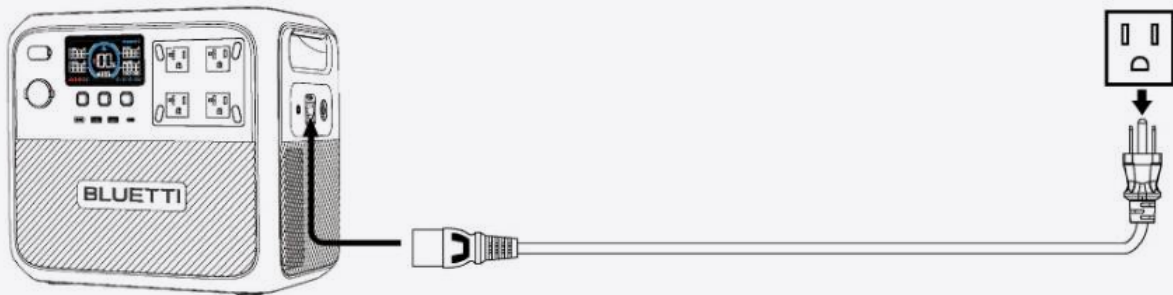

Solar Charging

Connect the solar panel(s) either in series or parallel, and use the solar charging cable to link them to Premium 200 V2. With a continuous input of 1,000W, the Premium 200 V2 reaches full capacity in about 2.4 hours.

Note:

- Make sure the solar panel(s) meets the following requirements:
Voc: 12V-60V Current: 20A Max. Power: 1,000W Max.
- For dual solar charging, use both sets of the cable's MC4 connectors. They will be connected in parallel. Ensure both sets have the same power rating and type of solar panels. For example, if one set has two 200W (20V/10A) panels in series, the other set should also have two 200W (20V/10A) panels of the same type in series.




Car Charging

Connect the Premium 200 V2 to your car's 12V or 24V cigarette lighter port or socket using the car charging cable. It charges at up to 96W with a 12V port and 192W with a 24V port.

Note:

- Make sure your car has power and the engine is running while charging.
- The Premium 200 V2 has a safety feature that stops charging when your car's battery is too low, preventing the battery from being over-discharged.

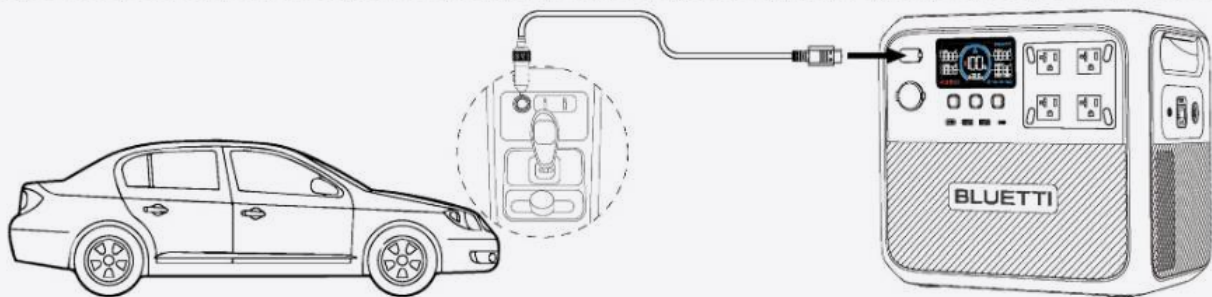


Generator Charging

Connect the Premium 200 V2 to a generator using the AC charging cable. The charging stops automatically when fully charged.


Note:

- Make sure the generator delivers a pure sine wave output with matching voltage and frequency.
- It's recommended to enable the Grid Self-Adaption mode when charging the Premium 200 V2 with a generator.

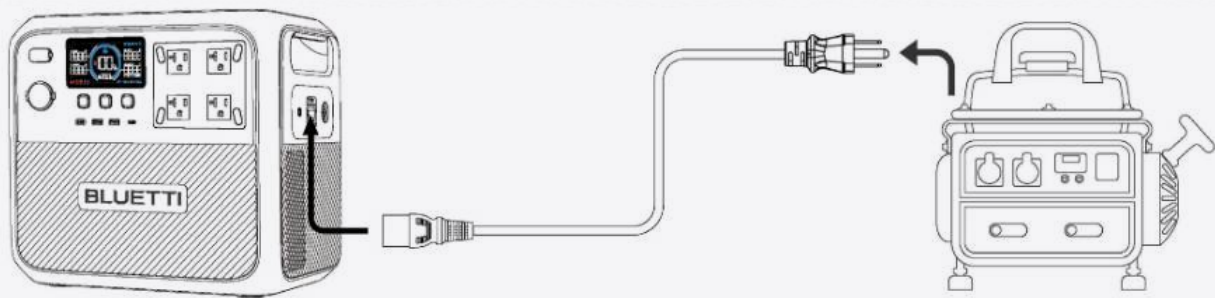


4.3 Power Your Devices

AC Outlets

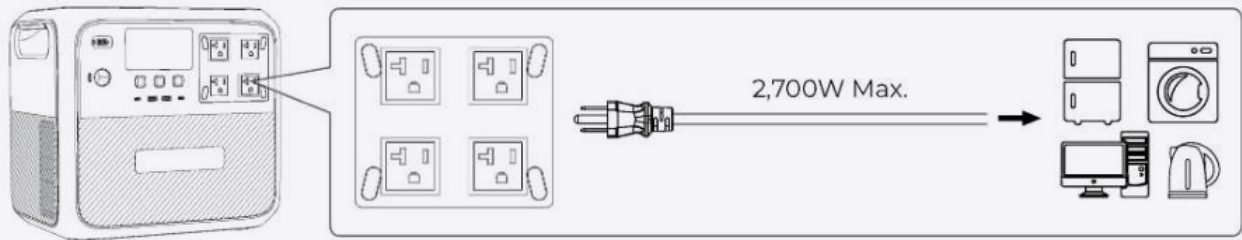

Note: When servicing the devices connected to the unit, remember to unplug them from the outlets. Even if the AC output is turned off, physically unplugging the devices is necessary for complete disconnection.

DC Outlets

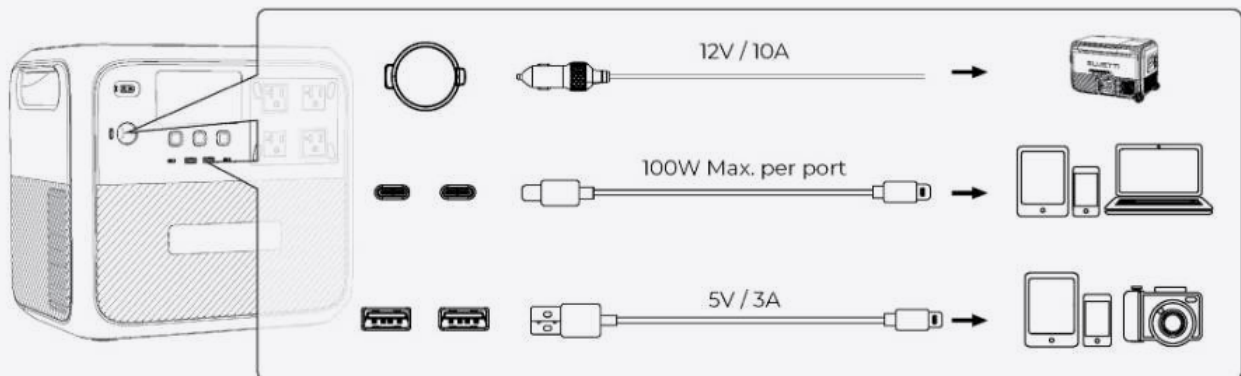


5. Configure Your Premium 200 V2

Press AC or DC button to switch frequencies, toggle WiFi and Bluetooth, and activate modes like Power Lifting, Standard and Silent Charging, and ECO. For advanced settings and features - such as Grid Self-Adaption mode, UPS mode, setting the maximum grid input current, and detailed ECO mode settings - use the BLUETTI app. Refer to the app manual for more details.

5.1 Settings Mode

Enter the Mode: Press and hold the AC and DC power buttons simultaneously for about 2 seconds. The frequency icon flashes.

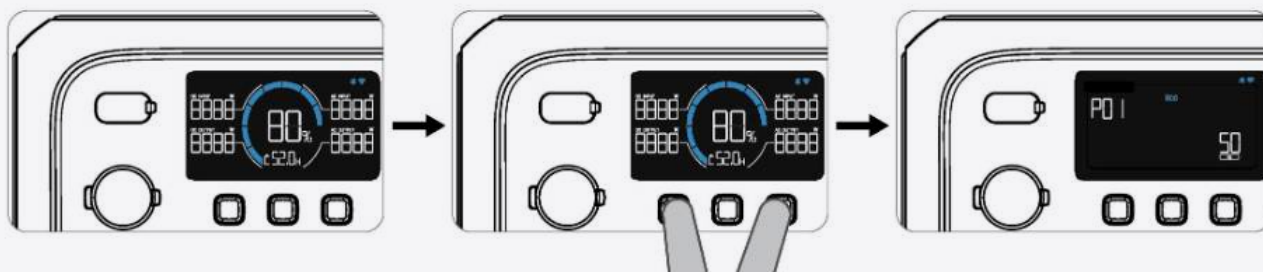


Exit the Mode: Press and hold both the AC and DC power buttons again.

If left idle for 1 minute, the Premium 200 V2 automatically exits without saving any changes.

Adjust settings in Settings Mode.

- Turn off the AC power before setting the frequency.
- Press the DC power button to navigate through the items, and press the AC power button to adjust.

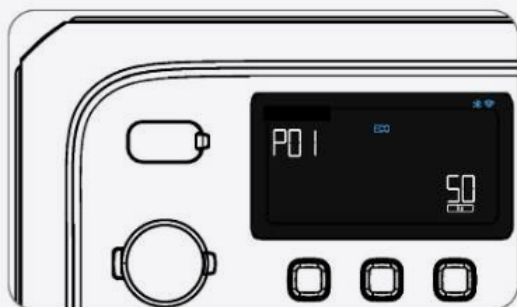

Page Code	Setting
P01	Frequency
P03	Charging Mode
P04	Power Lifting Mode
P05	ECO Mode
P06	Bluetooth
P07	WiFi

5.2 Charging Mode

The Premium 200 V2 offers three charging modes: Standard, Turbo, and Silent. Set Standard and Silent modes directly on the display, and use the app to activate Turbo mode. By default, the unit charges in Standard mode.

Mode	AC Input	Solar Input	AC + Solar Input	AC Charging Time (Estimated)	Note
Standard	1,440W Max.	1,000W Max.	2,400W Max.	1.6 hrs	Battery-friendly
Turbo	1,800W Max.	1,000W Max.	2,400W Max.	80% in 1 hour, 100% in 1.4 hrs	Quick recharge
Silent	800W Max.	800W Max.	800W Max.	3 hrs	Low noise

Note:

- To activate the Turbo mode, please contact BLUETTI support for help.
- When Turbo mode is enabled, the maximum grid input current automatically increases to 15A. In Standard or Silent mode, it reverts to 12A.
- The data above is for reference only.

5.3 Power Lifting Mode

Power Lifting mode is disabled by default. It allows Premium 200 V2 to power up to 4,050W pure resistive loads like kettles, electric blankets, hairdryers, and similar heating devices.

Note: This mode is only for pure resistive loads rated 2,700W-4,050W. While the Premium 200 V2 can handle such loads, its actual output power is still 2,700W.

5.4 ECO Mode

AC-ECO and DC-ECO modes are enabled by default. The Premium 200 V2 shuts off the AC or DC output after a period of low or no load.


Note:

- AC-ECO mode is not available when charging with AC power.
- Press the AC power button to turn on/off AC-ECO and DC-ECO modes together, and use the BLUETTI app to control them separately.
- Disable the ECO mode when connecting small devices under 60W or critical appliances such as lights and refrigerators.

6. View Device Information

View device information in Setting Mode, too.

- Go to the P01 frequency page and long press the DC power button to view the unit's SN. Press the DC power button again to navigate through other information.
- When on Fault History page, long press the AC power button for about 2 seconds, then release to clear the history.

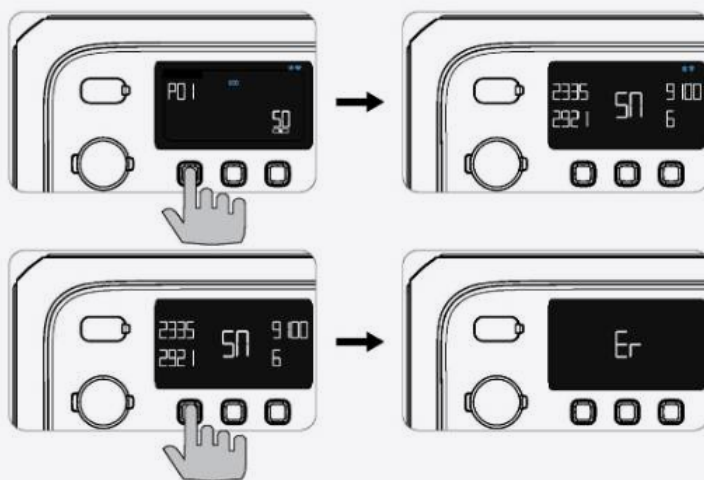


Page Code	Information
SN	Serial Number (SN)
Er	Error Code
HI	Fault History
UE	Version

7. UPS Feature

Connect Premium 200 V2 to the wall, and it directly draws power from the outlet to operate connected devices. It swiftly switches to battery power within 15 ms during an outage. Set UPS modes in the app.


• Standard

Premium 200 V2 charges using available solar and grid power, with a priority on solar.

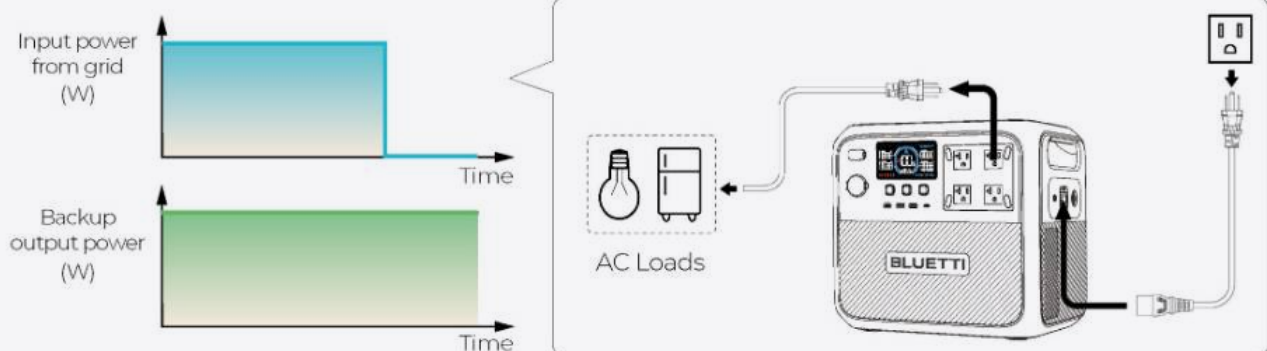


• Time Control

Save costs by scheduling Premium 200 V2 to charge during off-peak hours and power devices during peak hours.

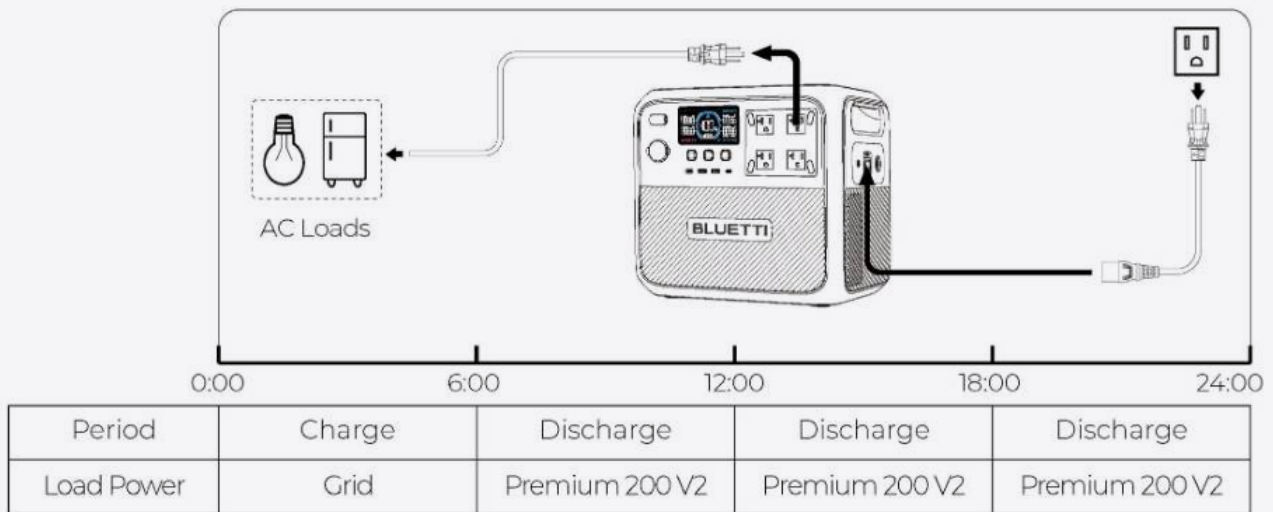


• PV Priority

Efficiently uses solar energy. Premium 200 V2 initially charges from the grid to a set SoC and seamlessly switches to solar replenishment.

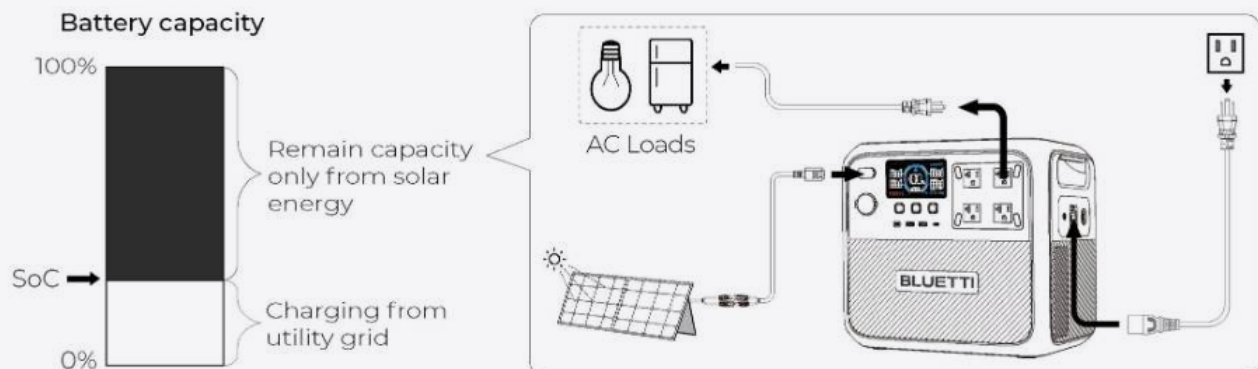

• Custom


Personalize charging/discharging schedule, set battery SoC limits, and control the schedule and grid input switches.

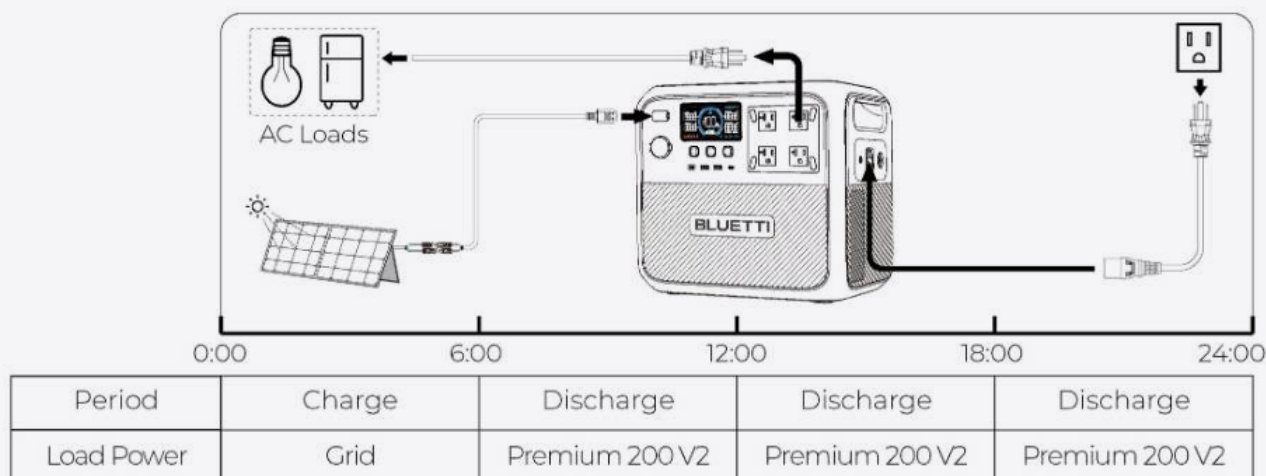

Attention: Not for devices like data servers or workstations that require high-performance UPS. BLUETTI assumes no liability for issues arising from violating this restriction.

8. Grid Self-adaption Mode

When charging with an unstable generator or grid power, or if consumption power exceeds charging power, enable this mode in the app. The Premium 200 V2 automatically adjusts to handle power fluctuations, protecting the unit and connected devices from potential issues due to variations in power quality.

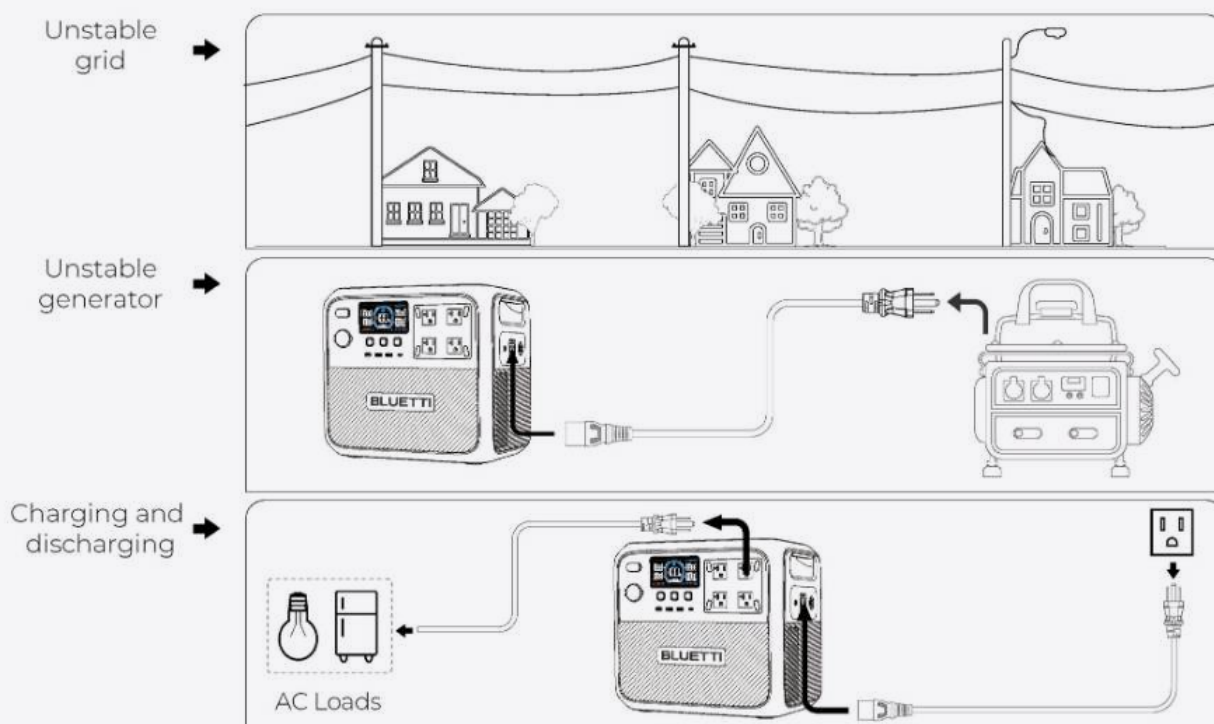


9. Adjust Grid Input Current

The default maximum grid input current is 12A. Use the app to increase it up to 15A.

Note:

- For settings above 12A, please contact BLUETTI support for help.
- If the current is set above 12A, the Premium 200 V2 switches to Turbo charging mode. For settings of 12A or below, it switches to Standard charging mode.

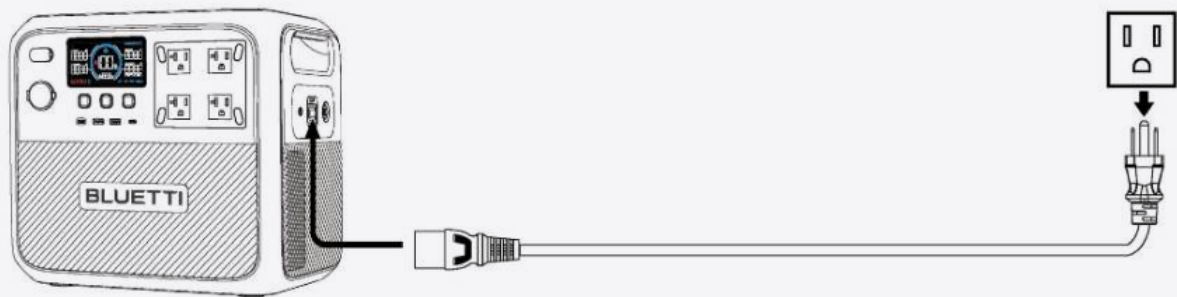

10. System Switch Recovery

When the battery runs out and the unit shuts down, it saves the ON/OFF status of the AC and DC power buttons.

- If connected to grid power, the saved settings will automatically restore when the battery reaches 5%.
- If not connected to grid power, the settings will only restore if the battery reaches 5% and at least 30 minutes have passed since the unit turned off.

For example, in standard UPS mode, if a refrigerator is plugged into the AC outlet of the Premium 200 V2 and the grid power goes out, the unit will provide immediate backup power. If the battery depletes, the unit will shut off but retain the AC output status as ON. When grid power returns and the battery is above 5%, the unit will automatically turn the AC output back ON to continue powering the refrigerator.

Note:

- During recovery, the AC and DC output settings can be adjusted via the app.
- To restore power immediately, turn off this feature.

11. Maintenance and Care

- If the unit's SoC falls below 5%, please recharge the unit in time.
- Before storing, charge to 40%-60% SoC, then power off and disconnect all cables.
- Store it in a cool, dry place, away from flammable materials.
- Safe storage temperature: -10°C to 40°C (14°F to 104°F). For storage over a month, keep it below 35°C (95°F).
- Fully cycle every 6 months to maintain battery health.
- Avoid extended storage; it may impact performance and lifespan.

If SoC drops to 0 during storage or startup:

- Shut down immediately.
- Charge within 48 hours.
- Keep it at 5°C to 35°C (41°F to 95°F) for 6 hours before charging.
- Recommended to charge via an AC source; if using solar energy, ensure an input of over 100W.

12. Specifications

Model	Premium 200 V2
Battery Capacity	2,073.6Wh (54Ah)
Battery Type	LiFePO ₄
Weight	24.2kg (53.35lbs)
Dimensions (L × W × H)	350 × 250 × 323.6mm (13.78 × 9.84 × 12.74in)
Charging Temperature	0°C to 40°C (32°F to 104°F)
Discharging Temperature	-20°C to 40°C (-4°F to 104°F)
Storage Temperature	Up to 1 month: -10°C to 40°C (14°F to 104°F) More than 1 month: -10°C to 35°C (14°F to 95°F) Before storage, keep the unit's SoC between 40% and 60%. Fully cycle it every 6 months. For transport, keep it at 25°C (77°F).
Operating Humidity	10% to 90%
AC Output	2,700W in total, 120V, 22.5A, 50Hz / 60Hz
DC Output	
Cigarette Lighter Port	12V / 10A
2 × USB-A	5V / 3A
2 × USB-C (PD 3.0)	100W Max. per port, 5V / 3A, 9V / 3A, 12V / 3A, 15V / 3A, 20V / 3A, 20V / 5A
AC Charging	1,800W Max., 120V, 15A Max., 50Hz / 60Hz (80% in 1 hr, 100% in 1.4 hrs @10°C to 30°C / 50°F to 86°F)
AC Input	1,800W Max. (Charging + Bypass)
DC Input (XT60PM-M)	1,000W Max., 12V to 60V, 20A Max.
AC + DC Input	2,400W Max.
Uninterruptible Power Supply (UPS)	
Switchover Time	≤15 ms

13. Troubleshooting & FAQ

On the Error Code page, the  and error code appears simultaneously on the screen. See the table below for guidance.

Error Code	Description	Solution
E001	Inverter overload	• Check device power usage. • Reduce load if too high.
E002	Inverter overtemperature protection, AC output off	• Wait 10 mins for the unit to cool down. • Turn on the AC output again.
E003	Inverter short circuit	• Check device power usage. • Check devices for short circuits.
E026	Unit overload	• Check if the AC and DC output is above 2,800W.
E033	PV overvoltage	• Ensure the PV input voltage is within 12V-60V.
E039	PV overtemperature	• Wait 10 mins for the unit to cool down. • Re-enable the PV input.
E065	DC output short circuit	• Check device power usage. • Check devices for short circuits.
E067	DC output overcurrent	• Check device power usage. • Reduce load if too high.
E068	DC output overtemperature	• Wait 10 mins for the unit to cool down. • Restart your devices.
E085	Charging temperature too high	• Wait for the unit to cool down before charging it again.
E086	Charging temperature too low	• Place the unit in an ambient temperature range of 0°C to 40°C (32°F to 104°F).
E087	Discharging temperature too high	• Wait for the unit to cool down before using it again.
E088	Discharging temperature too low	• Place the unit in an ambient temperature range of -20°C to 40°C (-4°F to 104°F).
E113	Grid overvoltage	• Verify home grid voltage. • Contact utility company if necessary.
E114	Grid undervoltage	• Verify home grid voltage. • Contact utility company if necessary.
E115	Grid overfrequency	• Verify home grid frequency. • Contact utility company if necessary.
E116	Grid underfrequency	• Verify home grid frequency. • Contact utility company if necessary.
Others	/	• Contact BLUETTI support for help.

FAQ (Frequently Asked Questions)

Q1: How do I know whether my devices will work with this product?

A: Keep the total AC power below 2,700W. Some devices with motors or compressors may start at 2-4 times their rated power, which could easily overload the Premium 200 V2.

Q2: Can I use third-party solar panels to charge this product?

A: Yes, you can use third-party solar panels with open circuit voltage of 12V-60V and MC4 connectors. Avoid mixing different types of solar panels.

Q3: Can it charge and discharge at the same time?

A: Yes, the Premium 200 V2 supports pass-through charging.

Q4: Why is the charging power often too low?

A: The built-in BMS adjusts the charging power based on battery temperature and SoC to protect the battery and extend its life.

Q5: How to calculate the operation time?

A: $\text{Operation time} = \text{Battery Capacity} \times \text{DoD} \times \eta \div (\text{Load} + \text{Premium 200 V2 Self-consumption})$

Note: DoD (Depth of Discharge) is 95%. η (inverter efficiency) is over 90%. The Premium 200 V2 self-consumption is about 13W.

Q6: Why does a warning come up when using a diesel heating pump with the cigarette lighter port?

A: The pump may require more initial power to start. Use a compatible adapter to start and run the pump with our AC outlets.

Appendix

Update Firmware via BLUETTI App

Keeping firmware updated is IMPORTANT for optimal performance. For detailed instructions, refer to the app user manual in the app.


1. Download the BLUETTI app

Scan the QR code or search for "BLUETTI" in the App Store or Google Play to download the app.




2. Log in or sign up

Log in with a BLUETTI account. If there is no account, create one by following the on-screen instructions.

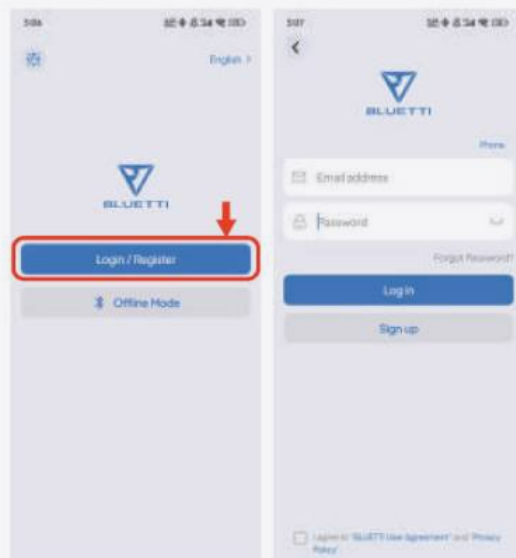


3. Bind the unit

- Tap Add Device directly or access My Devices > Add Device to start the process.
- Select the unit from the available device list, or choose Add Manually and enter the unit's serial number (SN).
- Alternatively, tap Scan on the Home page or in Add Device page to bind via QR code.

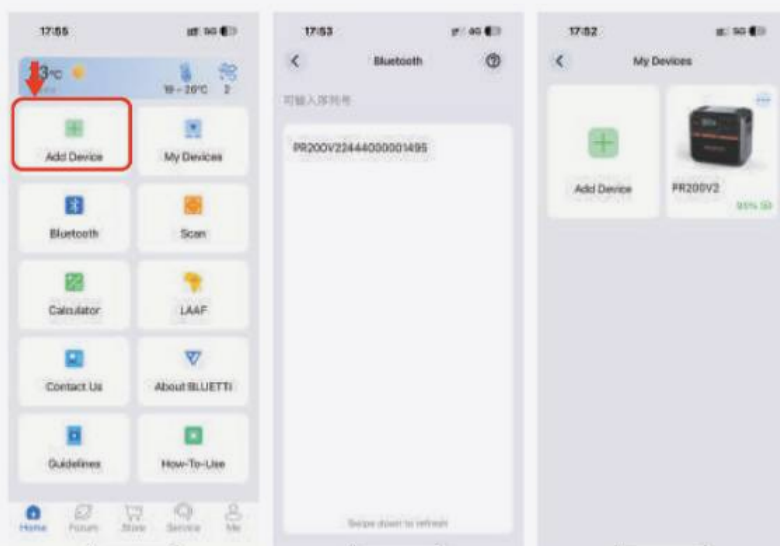

4. Connect via Bluetooth

On the My Devices page, tap the unit and select Bluetooth as the connection method.

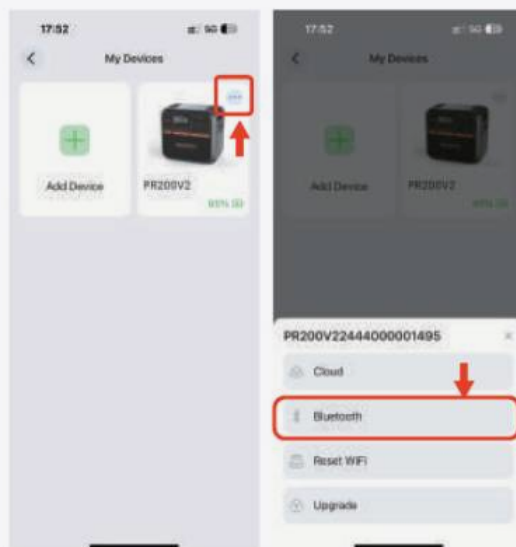


5. Check for Firmware Updates

Tap Upgrade to access the Upgrade page.
The app will check for the latest firmware version available for the unit.

6. Download and Install the Update

If a new firmware update is available, tap Upgrade and follow the on-screen instructions.

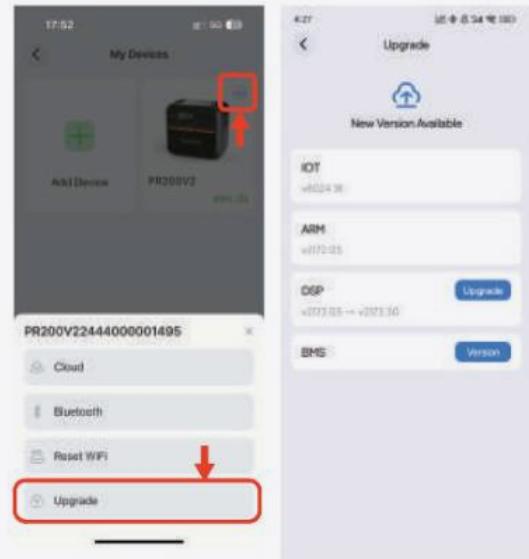


Note:


- Ensure the unit remains powered on and connected during the update.
- Keep your phone and the unit close together (recommended range: 5m / 16.4ft).
- Do not exit app until done.

Grounding Guidelines

Only use the grounding terminal when the product is connected to the home grid using a 2-pin cable, or if the wall outlet's grounding is ineffective, and the connected device features a metal case.

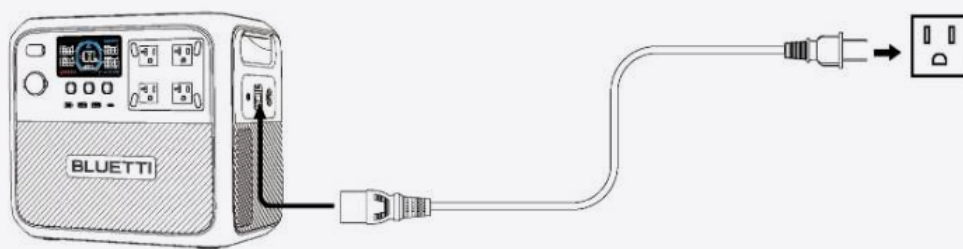

Use a cable with OT terminals for grounding. Connect one end to the grounding terminal with a grounding screw and the other end to the wall outlet or home distribution box ground.

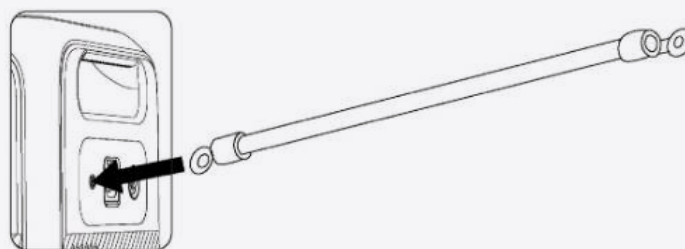

Compliance

• FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

IMPORTANT NOTE: FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

• IC Caution

This device contains licence-exempt transmitter(s) / receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

RF exposure statement: The equipment complies with ISED Radiation exposure limits set forth for uncontrolled environments. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) L' appareil ne doit pas produire de brouillage;
- (2) L' appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Déclaration d'exposition aux RF : L'équipement est conforme aux limites d'exposition aux rayonnements ISDE définies pour les environnements non contrôlés. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.

CAN ICES (B)/NMB(B)