



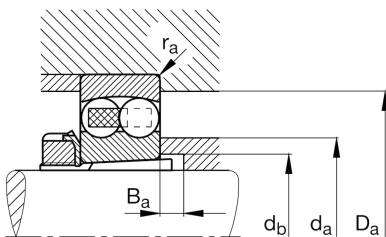
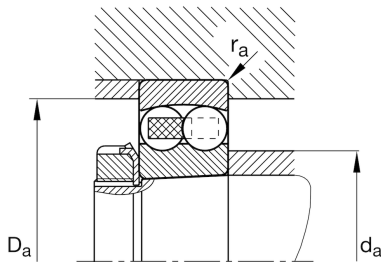
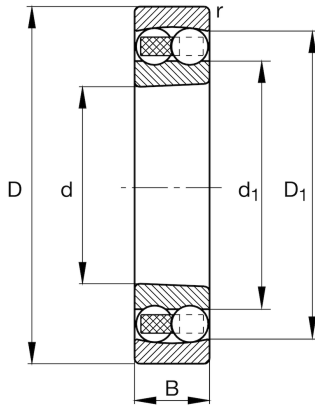
FAG

1306-K-TVH-C3

Self-aligning ball bearing

Schaeffler ID:
0389035120030Self-aligning ball bearing 13..-K-TVH,
tapered bore taper 1:12, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	30 mm	Bore diameter
D	72 mm	Outside diameter
B	19 mm	Width
r _{min}	1,1 mm	Minimum chamfer dimension
C _r	21.700 N	Basic dynamic load rating, radial
C _{0r}	6.300 N	Basic static load rating, radial
C _{ur}	400 N	Fatigue load limit, radial
n _G	11.100 1/min	Limiting speed
n _{gr}	8.700 1/min	Reference speed
	0,379 kg	Weight

Dimensions

D ₁	58,9 mm	Shoulder diameter outer ring
d ₁	45,1 mm	Shoulder diameter inner ring

Mounting dimensions

d _{a min}	37 mm	Minimum diameter shaft shoulder
d _{a max}	42 mm	Maximum diameter shaft shoulder
D _{a max}	65 mm	Maximum diameter of housing shoulder
d _{b min}	33 mm	Minimum cavity diameter of the sleeve
B _{a min}	6 mm	Minimum cavity width of the sleeve
r _{a max}	1 mm	Maximum fillet radius

Calculation factors

e	0,26	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y ₁	2,41	Dynamic axial load factor
Y ₂	3,72	Dynamic axial load factor
Y ₀	2,52	Static axial load factor

Additional information

H306	Adapter sleeve
------	----------------

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.