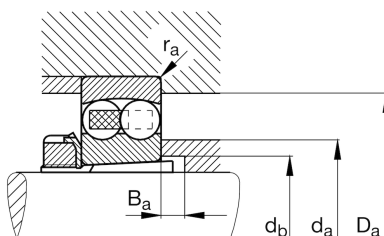
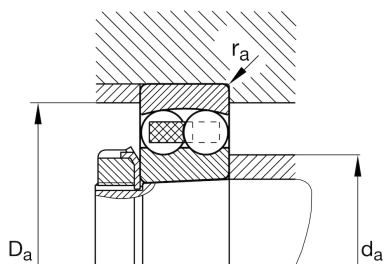
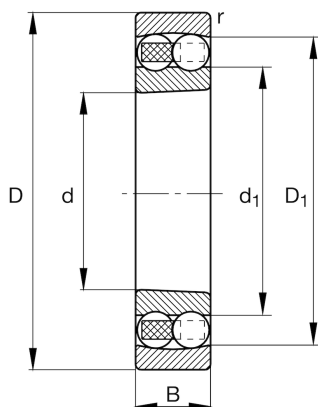
**FAG****1307-K-TVH-C3**

Self-aligning ball bearing

Schaeffler ID:
0389035390030Self-aligning ball bearing 13..-K-TVH,
tapered bore taper 1:12, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	35 mm	Bore diameter
D	80 mm	Outside diameter
B	21 mm	Width
r_{min}	1,5 mm	Minimum chamfer dimension
C_r	25.500 N	Basic dynamic load rating, radial
C_{0r}	7.900 N	Basic static load rating, radial
C_{ur}	500 N	Fatigue load limit, radial
n_G	9.700 1/min	Limiting speed
n_{gr}	7.800 1/min	Reference speed
	0,494 kg	Weight

Dimensions

D_1	70,1 mm	Shoulder diameter outer ring
d_1	51,3 mm	Shoulder diameter inner ring

Mounting dimensions

$d_{a min}$	44 mm	Minimum diameter shaft shoulder
$d_{a max}$	49 mm	Maximum diameter shaft shoulder
$D_{a max}$	71 mm	Maximum diameter of housing shoulder
$d_{b min}$	39 mm	Minimum cavity diameter of the sleeve
$B_{a min}$	8 mm	Minimum cavity width of the sleeve
$r_{a max}$	1,5 mm	Maximum fillet radius

Calculation factors

e	0,26	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	2,46	Dynamic axial load factor
Y_2	3,8	Dynamic axial load factor
Y_0	2,57	Static axial load factor

Additional information

H307	Adapter sleeve
------	----------------

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.