



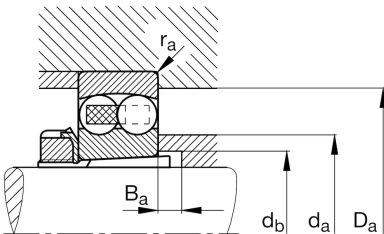
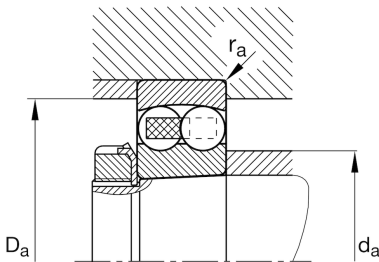
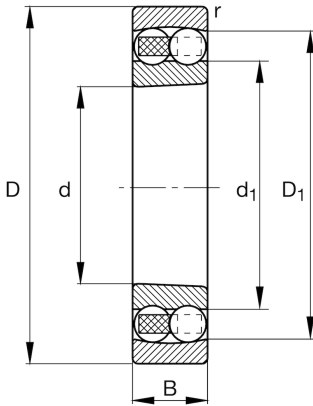
FAG

2205-K-TVH-C3

Self-aligning ball bearing

Schaeffler ID:
0389040040030Self-aligning ball bearing 22..-K-TVH,
tapered bore taper 1:12, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	25 mm	Bore diameter
D	52 mm	Outside diameter
B	18 mm	Width
r_{min}	1 mm	Minimum chamfer dimension
C_r	17.300 N	Basic dynamic load rating, radial
C_{0r}	4.450 N	Basic static load rating, radial
C_{ur}	285 N	Fatigue load limit, radial
n_G	14.400 1/min	Limiting speed
n_{gr}	13.400 1/min	Reference speed
	0,149 kg	Weight

Dimensions

D_1	44,4 mm	Shoulder diameter outer ring
d_1	32,3 mm	Shoulder diameter inner ring

Mounting dimensions

$d_{a min}$	30,6 mm	Minimum diameter shaft shoulder
$d_{a max}$	32 mm	Maximum diameter shaft shoulder
$D_{a max}$	46,4 mm	Maximum diameter of housing shoulder
$d_{b min}$	28 mm	Minimum cavity diameter of the sleeve
$B_{a min}$	5 mm	Minimum cavity width of the sleeve
$r_{a max}$	1 mm	Maximum fillet radius

Calculation factors

e	0,35	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	1,78	Dynamic axial load factor
Y_2	2,75	Dynamic axial load factor
Y_0	1,86	Static axial load factor

Additional information

H305	Adapter sleeve
------	----------------

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.