

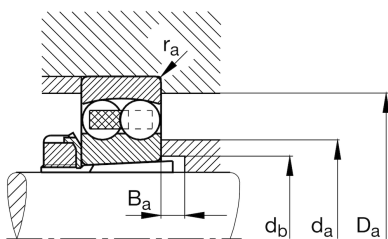
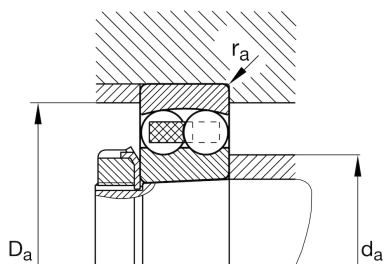
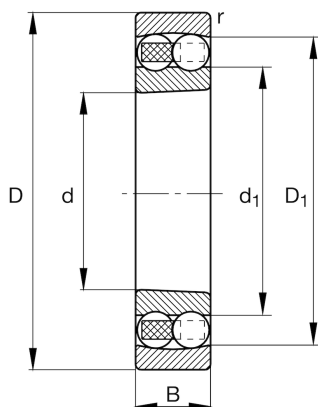
FAG

2210-K-TVH-C3

Self-aligning ball bearing

Schaeffler ID:
0380590880030Self-aligning ball bearing 22..-K-TVH,
tapered bore taper 1:12, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	50 mm	Bore diameter
D	90 mm	Outside diameter
B	23 mm	Width
r_{min}	1,1 mm	Minimum chamfer dimension
C_r	28.500 N	Basic dynamic load rating, radial
C_{0r}	9.500 N	Basic static load rating, radial
C_{ur}	600 N	Fatigue load limit, radial
n_G	8.100 1/min	Limiting speed
n_{gr}	7.100 1/min	Reference speed
	0,534 kg	Weight

Dimensions

D_1	80,5 mm	Shoulder diameter outer ring
d_1	64 mm	Shoulder diameter inner ring

Mounting dimensions

$d_{a min}$	57 mm	Minimum diameter shaft shoulder
$d_{a max}$	61 mm	Maximum diameter shaft shoulder
$D_{a max}$	83 mm	Maximum diameter of housing shoulder
$d_{b min}$	55 mm	Minimum cavity diameter of the sleeve
$B_{a min}$	10 mm	Minimum cavity width of the sleeve
$r_{a max}$	1 mm	Maximum fillet radius

Calculation factors

e	0,24	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	2,62	Dynamic axial load factor
Y_2	4,06	Dynamic axial load factor
Y_0	2,75	Static axial load factor

Additional information

H310	Adapter sleeve
------	----------------

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.