

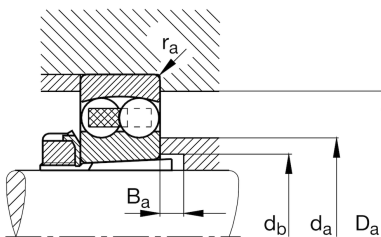
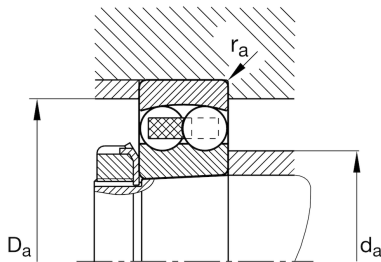
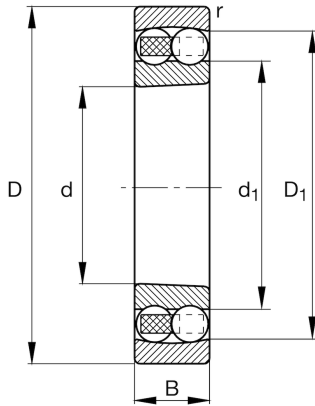
FAG

2212-K-TVH-C3

Self-aligning ball bearing

Schaeffler ID:
0384726000030Self-aligning ball bearing 22..-K-TVH,
tapered bore taper 1:12, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	60 mm	Bore diameter
D	110 mm	Outside diameter
B	28 mm	Width
r_{min}	1,5 mm	Minimum chamfer dimension
C_r	48.000 N	Basic dynamic load rating, radial
C_{0r}	16.500 N	Basic static load rating, radial
C_{ur}	1.040 N	Fatigue load limit, radial
n_G	6.300 1/min	Limiting speed
n_{gr}	6.400 1/min	Reference speed
	1,046 kg	Weight

Dimensions

D_1	98,2 mm	Shoulder diameter outer ring
d_1	76,6 mm	Shoulder diameter inner ring

Mounting dimensions

$d_{a min}$	69 mm	Minimum diameter shaft shoulder
$d_{a max}$	73 mm	Maximum diameter shaft shoulder
$D_{a max}$	101 mm	Maximum diameter of housing shoulder
$d_{b min}$	65 mm	Minimum cavity diameter of the sleeve
$B_{a min}$	8 mm	Minimum cavity width of the sleeve
$r_{a max}$	1,5 mm	Maximum fillet radius

Calculation factors

e	0,23	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	2,68	Dynamic axial load factor
Y_2	4,15	Dynamic axial load factor
Y_0	2,81	Static axial load factor

Additional information

H312	Adapter sleeve
------	----------------

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.