



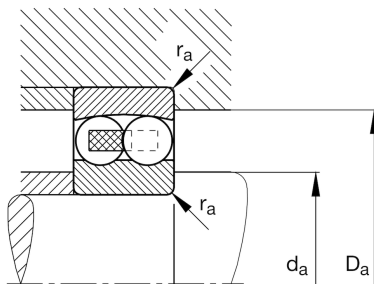
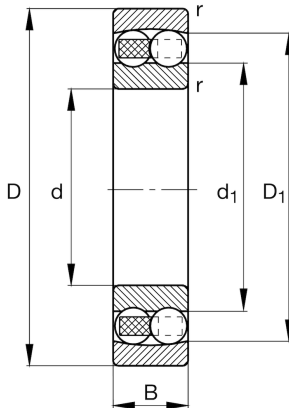
FAG

**2220-M**

Self-aligning ball bearing

Schaeffler ID:  
0190060800000Self-aligning ball bearing 22..-M, solid  
brass cage

## Technical information

**Main Dimensions & Performance Data**

d	100 mm	Bore diameter
D	180 mm	Outside diameter
B	46 mm	Width
$r_{\min}$	2,1 mm	Minimum chamfer dimension
$C_r$	98.000 N	Basic dynamic load rating, radial
$C_{0r}$	40.500 N	Basic static load rating, radial
$C_{ur}$	2.180 N	Fatigue load limit, radial
$n_G$	5.700 1/min	Limiting speed
$n_{gr}$	4.900 1/min	Reference speed
	4,98 kg	Weight

**Dimensions**

$D_1$	156,9 mm	Shoulder diameter outer ring
$d_1$	124,4 mm	Shoulder diameter inner ring

**Mounting dimensions**

$d_{a\min}$	112 mm	Minimum diameter shaft shoulder
$D_{a\max}$	168 mm	Maximum diameter of housing shoulder
$r_{a\max}$	2,1 mm	Maximum fillet radius

**Calculation factors**

e	0,27	Limiting value of $F_a/F_r$ for the applicability of diff. Values of factors X and Y
$Y_1$	2,33	Dynamic axial load factor
$Y_2$	3,61	Dynamic axial load factor
$Y_0$	2,45	Static axial load factor

**Temperature range**

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	150 °C	Operating temperature max.