



FAG


7304-B-XL-MP

Angular contact ball bearing

Schaeffler ID:
\${ctx.productData.sapMaterialNumber}Angular contact ball bearing 73..-B-XL-MP,
single row, X-life, solid brass cage

X-life

Technical information

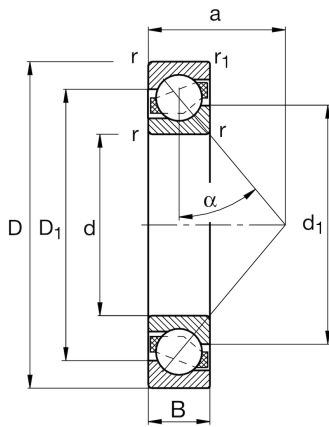

Main Dimensions & Performance Data

d	20 mm	Bore diameter
D	52 mm	Outside diameter
B	15 mm	Width
C _r	20.200 N	Basic dynamic load rating, radial
C _{0r}	10.000 N	Basic static load rating, radial
C _{ur}	700 N	Fatigue load limit, radial
n _G	25.000 1/min	Limiting speed
n _{gr}	11.700 1/min	Reference speed
	0,165 kg	Weight

Additional information

r _{min}	1,1 mm	Minimum chamfer dimension
r _{1 min}	0,6 mm	Minimum chamfer dimension
D ₁	39,7 mm	Shoulder diameter on outer ring wide side face
d ₁	33,04 mm	Shoulder diameter on inner ring wide side face
a	23 mm	Distance between the apexes of the pressure cones
α	40 °	Contact angle

Mounting dimensions

d _{a min}	27 mm	Minimum diameter of shaft shoulder
D _{a max}	45 mm	Maximum diameter of housing shoulder
D _{b max}	47,8 mm	Maximaler Durchmesser der Gehäuseschulter
r _{a max}	1 mm	Maximum fillet radius of shaft
r _{a1 max}	0,6 mm	Maximum fillet radius of housing

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	150 °C	Operating temperature max.

