

**FAG****QJ1256-N2-MPA**

Four-point contact bearing

Schaeffler ID:
0543081600000Four point contact bearing QJ12...N2-
MPA, holding grooves, solid brass cage

Technical information

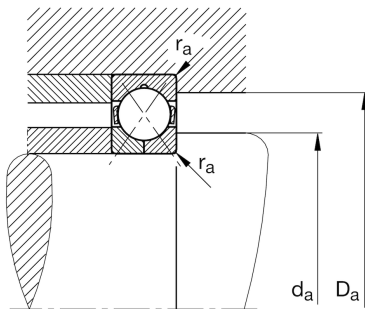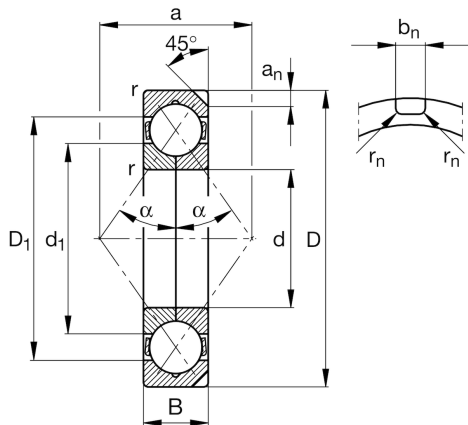

Main Dimensions & Performance Data

d	280 mm	Bore diameter
D	500 mm	Outside diameter
B	90 mm	Width
C _r	790.000 N	Basic dynamic load rating, radial
C _{0r}	1.600.000 N	Basic static load rating, radial
C _{ur}	45.500 N	Fatigue load limit, radial
n _G	2.240 1/min	Limiting speed
n _{gr}	1.110 1/min	Reference speed
	81,8 kg	Weight

Dimensions

r _{min}	5 mm	Minimum chamfer dimension
D ₁	420,8 mm	Shoulder diameter outer ring
d ₁	362,45 mm	Shoulder diameter inner ring
a	780 mm	Distance between the apexes of the pressure cones
a _n	15 mm	Height retaining slot
b _n	12,5 mm	Width retaining slot
r _n	2,5 mm	Radius retaining slot
	45 °	Angle retaining slot
α	45 °	Contact angle

Mounting dimensions

d _{a min}	300 mm	Minimum diameter shaft shoulder
D _{a max}	480 mm	Maximum diameter of housing shoulder
r _{a max}	4 mm	Maximum fillet radius

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	200 °C	Operating temperature max.