



FAG



QJ216-XL-N2-MPA-C3

Four-point contact bearing

Schaeffler ID:
0167423380030Four point contact bearing QJ2..-XL-N2-
MPA, X-life, holding grooves, solid brass
cage

X-life

Technical information

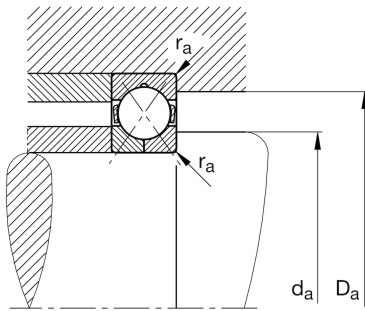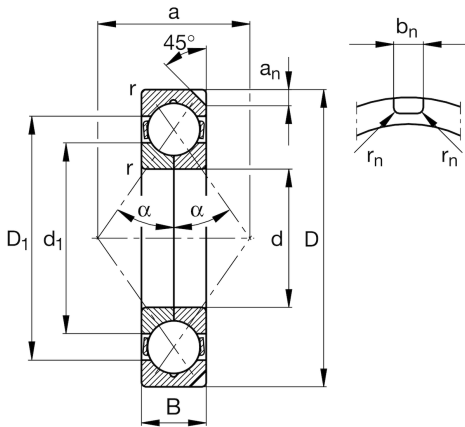

Main Dimensions & Performance Data

d	80 mm	Bore diameter
D	140 mm	Outside diameter
B	26 mm	Width
C _r	136.000 N	Basic dynamic load rating, radial
C _{0r}	137.000 N	Basic static load rating, radial
C _{ur}	9.700 N	Fatigue load limit, radial
n _G	9.400 1/min	Limiting speed
n _{gr}	4.250 1/min	Reference speed
	1,728 kg	Weight

Dimensions

r _{min}	2 mm	Minimum chamfer dimension
D ₁	119,6 mm	Shoulder diameter outer ring
d ₁	100,9 mm	Shoulder diameter inner ring
a	77 mm	Distance between the apexes of the pressure cones
a _n	8,1 mm	Height retaining slot
b _n	6,5 mm	Width retaining slot
r _n	1 mm	Radius retaining slot
	45 °	Angle retaining slot
α	35 °	Contact angle

Mounting dimensions

d _{a min}	91 mm	Minimum diameter shaft shoulder
D _{a max}	129 mm	Maximum diameter of housing shoulder
r _{a max}	2 mm	Maximum fillet radius

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	150 °C	Operating temperature max.