


Deep groove ball bearings - Single-row - Shielded/sealed type - Shielded ZZ

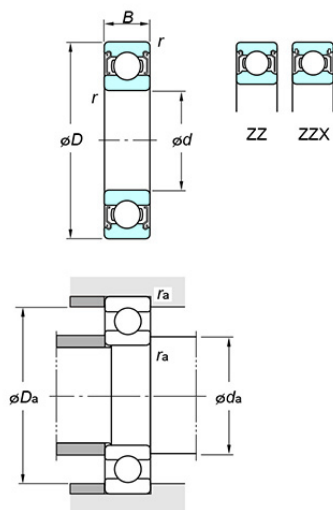

Bearing No. 6022 ZZX

Specifications

(Boundary dimensions ...etc)

d(mm)	110
D(mm)	170
B(mm)	28
r(min.)(mm)	2
Basic load ratings : Cr(kN)	103
Basic load ratings : C0r(kN)	73.0
Fatigue load limit : Cu(kN)	3.55
factor : f0(l)	15.6
Limiting speeds(Grease lub.)(min-1)	3800
Limiting speeds(Oil lub.)(min-1)	

Mounting dimensions

da(min.)(mm)	119
da(max.)(mm)	123
Da(max.)(mm)	161
ra(max.)(mm)	2

Refer.

(Refer.)Mass(kg)	1.96
------------------	------