
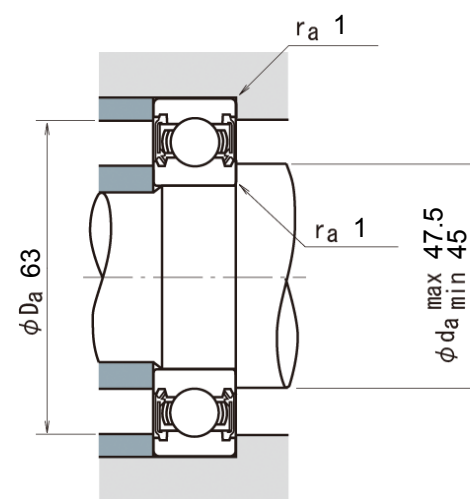


└ Single-Row

└ DDDDU: With Two Contact Sealed

Boundary Dimensions (mm)				Basic Load Ratings (kN)		Limiting Speeds (min ⁻¹)		Bearing Numbers	NSKHPS
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> min.	<i>C_r</i>	<i>C_{0r}</i>	Grease	Oil		
40	68	15	1	16.8	11.5	6000	-	6008DDU	

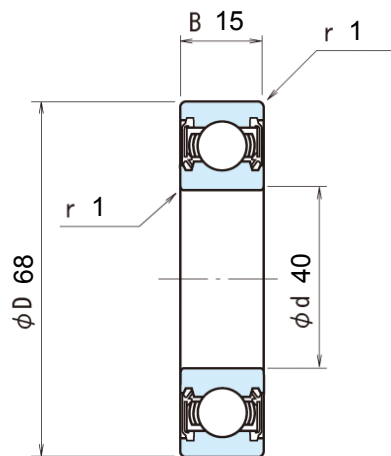

Factor	Mass (kg) approx.
<i>f₀</i>	
15.3	0.19