

[TopPage](#)>>[Search Result](#)>>5200AZZ

# Angular Contact Ball Bearings


Bearing No. : **NACHI 5200AZZ**

**Bearing Type** 
**Clearance** 
**Tolerance Class**

(0.002~0.013)

**Dimensions**

$d = 10$  0  
 -0.008  
 $D = 30$  0  
 -0.009  
 $B = 14.3$  0  
 -0.120  
 $r = 0.6 \sim 1$   
 (Radial Direction)  
 $r = 0.6 \sim 2$   
 (Axial Direction)

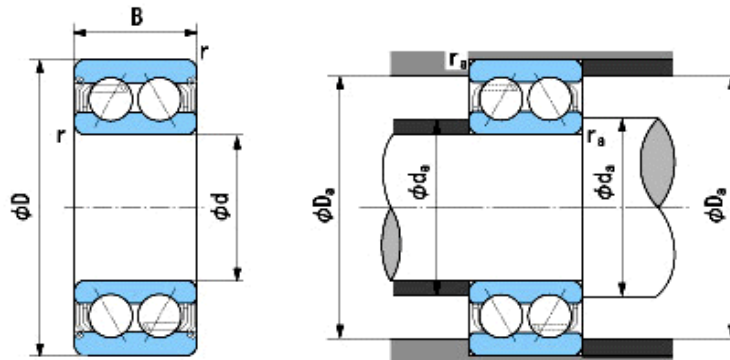

**Dimensions**  
 $d_a(\min) = 15$   
 $D_a(\max) = 25$   
 $r_a(\max) = 0.6$   
 Mass = 0.05 kg

Basic Dynamic Load Rating  $C_r$  : **6,950** N  
 Basic Static Load Rating  $C_{or}$  : **3,800** N  
 Limiting Speed ;  
 Grease Lubrication : **16,000**  $\text{min}^{-1}$   
 Oil Lubrication : -  $\text{min}^{-1}$

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	-
Axial Runout with Raceway :	-	-
Width Variation :	<b>0.015</b>	<b>0.015</b>
Radial Runout :	<b>0.010</b>	<b>0.015</b>