Angular Contact Ball Bearings

Bearing No. : NACHI 7234CDT

Bearing Type Tandem(DT) **Clearance** **Tolerance Class** Normal Class

Dimensions

d = 170 $^{0}_{-0.025}$

D = 310 $^{0}_{-0.035}$

B = 52 $^{0}_{0.000}$

r = 4~6.5
(Radial Direction)
r = 4~9
(Axial Direction)
r1 = 1.5~3
(Radial Direction)
r1 = 1.5~5
(Axial Direction)
a = 2.2

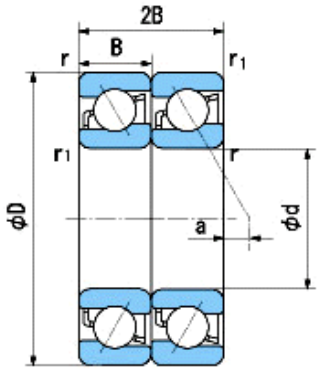

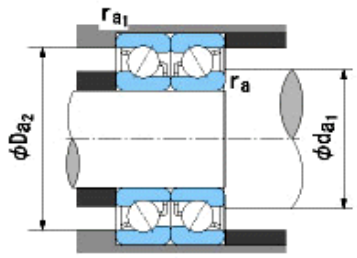

Dimensions

da1(min) = 188
da2(min) = 179
Da1(max) = 292
Da2(max) = 301
ra(max) = 3
ra1(max) = 1.5
Mass = 34.8 kg

			INNER RING	OUTER RING
Basic Dynamic Load Rating Cr :	485,000	N	O.D.Surface Runout with Side :	-
Basic Static Load Rating Cor :	725,000	N	Axial Runout with Bore :	-
Limiting Speed ;			Axial Runout with Raceway :	- -
Grease Lubrication :	2,600	min^{-1}	Width Variation :	0.030 0.030
Oil Lubrication :	3,700	min^{-1}	Radial Runout :	0.030 0.060

فروشگاه کالا صنعتی
www.kalasanati.com
کالا صنعتی تنها یک فروشگاه نیست!
آموزش، انتخاب، خرید