

Angular Contact Ball Bearings

Bearing No. : **NACHI 7302DT**



■ Bearing Type Tandem(DT) ▼

■ Clearance ▼

■ Tolerance Class Normal Class ▼

Dimensions

d = 15 0
-0.008
D = 42 0
-0.011
B = 13 0
0.000
r = 1~1.5
(Radial Direction)
r = 1~3
(Axial Direction)
r1 = 0.6~1
(Radial Direction)
r1 = 0.6~2
(Axial Direction)
a = 1.7

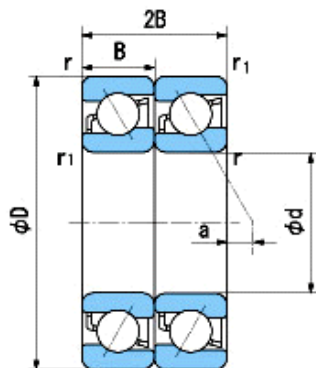

Dimensions

da1(min) = 21
da2(min) = 18
Da1(max) = 36
Da2(max) = 38.4
ra(max) = 1
ra1(max) = 0.6
Mass = 0.17 kg

Basic Dynamic Load Rating Cr : **22,000** N
Basic Static Load Rating Cor : **14,200** N
Limiting Speed ;
Grease Lubrication : **13,000** min⁻¹
Oil Lubrication : **17,000** min⁻¹

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	
Axial Runout with Raceway :	-	-
Width Variation :	0.020	0.020
Radial Runout :	0.010	0.020