

Angular Contact Ball Bearings

Bearing No. : **NACHI 7308CDF**



■ Bearing Type Face-to-Face(DF) ▼

■ Clearance ▼

■ Tolerance Class Normal Class ▼

Dimensions

d = 40 0
-0.012
D = 90 0
-0.015
B = 23 0
0.000
r = 1.5~2.3
(Radial Direction)
r = 1.5~4
(Axial Direction)
r1 = 1~1.5
(Radial Direction)
r1 = 1~3
(Axial Direction)
a = -4

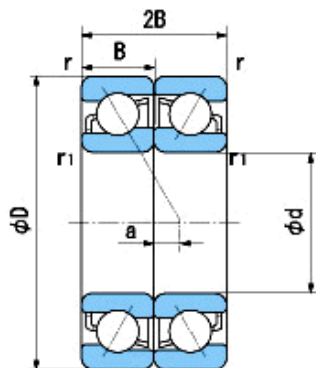

Dimensions

da1(min) = 49
da2(min) = 49
Da1(max) = 81
Da2(max) = 84.6
ra(max) = 1.5
ra1(max) = 1
Mass = 1.31 kg

Basic Dynamic Load Rating Cr :	80,500 N
Basic Static Load Rating Cor :	65,500 N
Limiting Speed ;	
Grease Lubrication :	9,600 min ⁻¹
Oil Lubrication :	13,000 min ⁻¹

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	
Axial Runout with Raceway :	-	-
Width Variation :	0.020	0.020
Radial Runout :	0.015	0.035