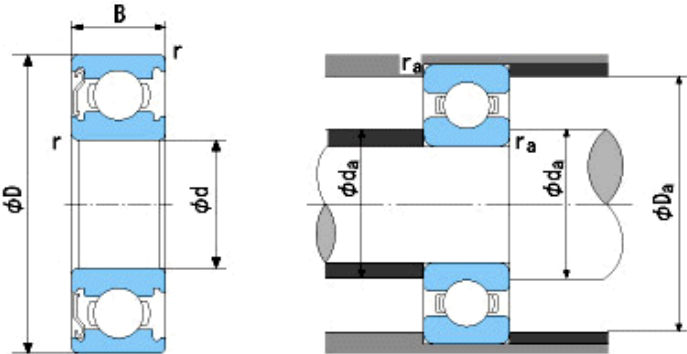


Deep-groove Ball Bearings

Bearing No. : **NACHI 6008ZE**

Bearing Type
Clearance
Tolerance Class

(0.006~0.020)

<p>Dimensions</p> <p>d = 40 $\begin{matrix} 0 \\ -0.012 \end{matrix}$</p> <p>D = 68 $\begin{matrix} 0 \\ -0.013 \end{matrix}$</p> <p>B = 15 $\begin{matrix} 0 \\ -0.120 \end{matrix}$</p> <p>r = 1~1.5 (Radial Direction)</p> <p>r = 1~3 (Axial Direction)</p>		<p>Dimensions</p> <p>da(min) = 45</p> <p>Da(max) = 63</p> <p>ra(max) = 1</p> <p>Mass = 0.194 kg</p>
---	---	---

Basic Dynamic Load Rating Cr :	16,800 N	INNER RING	OUTER RING
Basic Static Load Rating Cor :	11,500 N	O.D.Surface Runout with Side :	-
Limiting Speed ;		Axial Runout with Bore :	-
Grease Lubrication :	10,000 min ⁻¹	Axial Runout with Raceway :	-
Oil Lubrication :	12,000 min ⁻¹	Width Variation :	0.020 0.020
		Radial Runout :	0.015 0.025