

Deep-groove Ball Bearings

Bearing No. : **NACHI 6020N**

■ **Bearing Type** Snap Ring Groove only ▼



■ **Clearance** CN(Normal) ▼

■ **Tolerance Class** Normal Class ▼

(0.012~0.036)

Dimensions

d = 100⁰_{-0.020}
 D = 150⁰_{-0.018}
 B = 24⁰_{-0.200}
 r = 1.5~2.3
 (Radial Direction)
 r = 1.5~4
 (Axial Direction)
 r1 = 0.5~
 (Radial Direction)
 r1 = 0.5~
 (Axial Direction)
 D1 = 145.24
 a = 3.71
 b = 3.1
 D2 = 159.7
 f = 2.82

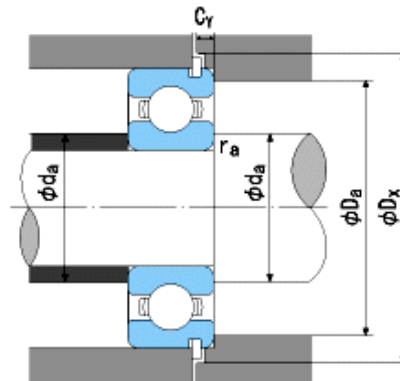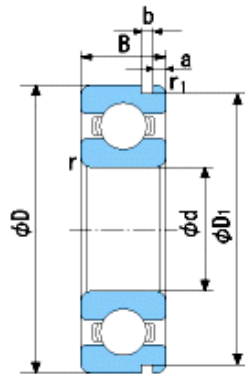

Dimensions

da(min) = 107
 Da(max) = 143
 Dx(min) = 162
 ra(max) = 1.5
 Cy(max) = 6.1

Basic Dynamic Load Rating Cr : **60,000** N
 Basic Static Load Rating Cor : **54,000** N
 Limiting Speed ;
 Grease Lubrication : **4,300** min⁻¹
 Oil Lubrication : **5,300** min⁻¹

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	-
Axial Runout with Raceway :	-	-
Width Variation :	0.025	0.025