

# Deep-groove Ball Bearings

Bearing No. : **NACHI 6026N**

■ **Bearing Type** Snap Ring Groove only ▼



■ **Clearance** CN(Normal) ▼

■ **Tolerance Class** Normal Class ▼

(0.018~0.048)

**Dimensions**

d = 130<sup>0</sup><sub>-0.025</sub>  
 D = 200<sup>0</sup><sub>-0.030</sub>  
 B = 33<sup>0</sup><sub>-0.250</sub>  
 r = 2~3.5  
 (Radial Direction)  
 r = 2~5  
 (Axial Direction)  
 r1 = 0.5~  
 (Radial Direction)  
 r1 = 0.5~  
 (Axial Direction)  
 D1 = 193.65  
 a = 5.69  
 b = 3.5  
 D2 = 212.9  
 f = 3.1

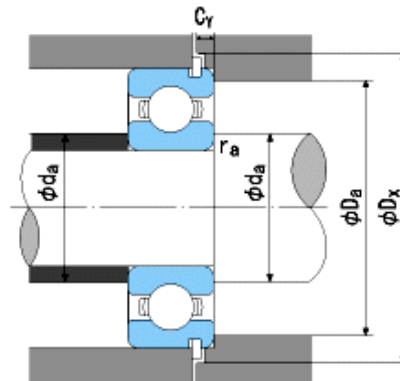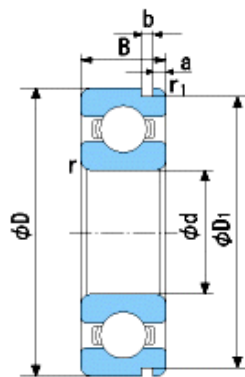

**Dimensions**

da(min) = 138  
 Da(max) = 192  
 Dx(min) = 215  
 ra(max) = 2  
 Cy(max) = 8.4

Basic Dynamic Load Rating Cr : **106,000** N  
 Basic Static Load Rating Cor : **101,000** N  
 Limiting Speed ;  
 Grease Lubrication : **3,200** min<sup>-1</sup>  
 Oil Lubrication : **3,800** min<sup>-1</sup>

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	-
Axial Runout with Raceway :	-	-
Width Variation :	<b>0.030</b>	<b>0.030</b>