

Deep-groove Ball Bearings

Bearing No. : **NACHI 6026NR**

Bearing Type Snap Ring
Clearance CN(Normal)
Tolerance Class Normal Class


(0.018~0.048)

Dimensions

Dimensions

$d = 130$
 $D = 200$
 $B = 33$
 $r = 2 \sim 3.5$
 (Radial Direction)
 $r = 2 \sim 5$
 (Axial Direction)
 $r_1 = 0.5 \sim$
 (Radial Direction)
 $r_1 = 0.5 \sim$
 (Axial Direction)
 $D_1 = 193.65$
 $a = 5.69$
 $D_2 = 212.9$
 $f = 3.1$

$d_{a(\min)} = 138$
 $D_{a(\max)} = 192$
 $D_{x(\min)} = 215$
 $r_{a(\max)} = 2$
 $C_{y(\max)} = 8.4$

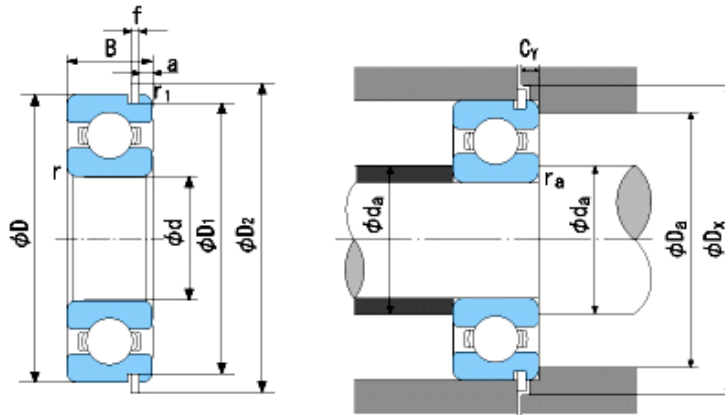

Basic Dynamic Load Rating C_r : **106,000** N
 Basic Static Load Rating C_{or} : **101,000** N
 Limiting Speed ;
 Grease Lubrication : **3,200** min⁻¹
 Oil Lubrication : **3,800** min⁻¹

	INNER RING	OUTER RING
O.D.Surface Runout with Side :	-	-
Axial Runout with Bore :	-	-
Axial Runout with Raceway :	-	-
Width Variation :	0.030	0.030
Radial Runout :	0.030	0.050