

[TopPage](#)>>[Search Result](#)>>6030ZZ

# Deep-groove Ball Bearings

Bearing No. : **NACHI 6030ZZ**

■ **Bearing Type**

Two shields ▼

■ **Clearance**

CN(Normal) ▼

■ **Tolerance Class**

Normal Class ▼

(0.018~0.053)



Dimensions

$d = 150$   
0  
-0.025

$D = 225$   
0  
-0.030

$B = 35$   
0  
-0.250

$r = 2.1 \sim 4$   
(Radial Direction)  
 $r = 2.1 \sim 6.5$   
(Axial Direction)

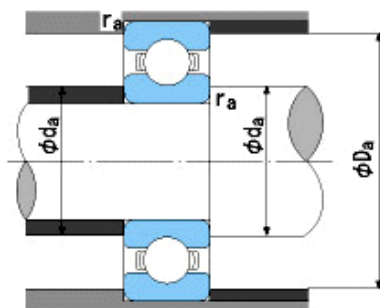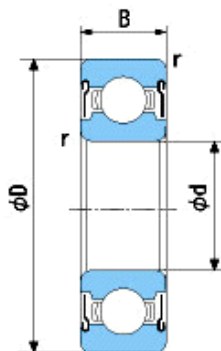

Dimensions

$d_a(\min) = 159$

$D_a(\max) = 216$

$r_a(\max) = 2$

Mass = 4.48 kg

Basic Dynamic Load Rating  $C_r$  : **126,000** N

Basic Static Load Rating  $C_{or}$  : **126,000** N

Limiting Speed ;

Grease Lubrication : **2,600**  $\text{min}^{-1}$

Oil Lubrication : -  $\text{min}^{-1}$

|                                | INNER RING   | OUTER RING   |
|--------------------------------|--------------|--------------|
| O.D.Surface Runout with Side : |              | -            |
| Axial Runout with Bore :       | -            |              |
| Axial Runout with Raceway :    | -            | -            |
| Width Variation :              | <b>0.030</b> | <b>0.030</b> |
| Radial Runout :                | <b>0.030</b> | <b>0.050</b> |