

Deep-groove Ball Bearings

Bearing No. : **NACHI 6216ZNR**

■ Bearing Type



■ Clearance

■ Tolerance Class

(0.010~0.030)

Dimensions

d = 80 0
-0.015
D = 140 0
-0.018
B = 26 0
-0.150
r = 2~3
(Radial Direction)
r = 2~4.5
(Axial Direction)
r1 = 0.5~
(Radial Direction)
r1 = 0.5~
(Axial Direction)
D1 = 135.23
a = 4.9
D2 = 149.7
f = 2.82

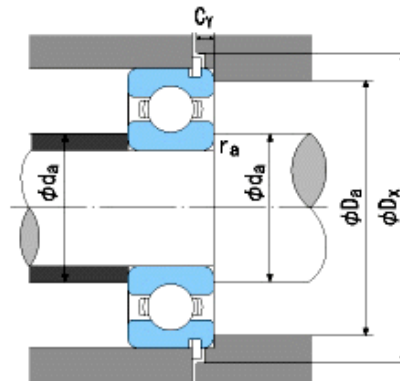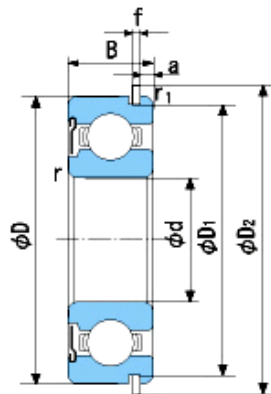

Dimensions

da(min) = 90
Da(max) = 130
Dx(min) = 152
ra(max) = 2
Cy(max) = 7.3

Basic Dynamic Load Rating Cr : **72,500** N
Basic Static Load Rating Cor : **53,000** N
Limiting Speed ;
Grease Lubrication : **4,500** min⁻¹
Oil Lubrication : **5,300** min⁻¹

	INNER RING	OUTER RING
O.D.Surface Runout with Side :	-	-
Axial Runout with Bore :	-	-
Axial Runout with Raceway :	-	-
Width Variation :	0.025	0.025
Radial Runout :	0.020	0.040