

Deep-groove Ball Bearings

Bearing No. : **NACHI 6224ZZ**

■ **Bearing Type**

Two shields ▼

■ **Clearance**

CN(Normal) ▼


■ **Tolerance Class**

Normal Class ▼

(0.015~0.041)

Dimensions

$d = 120$
0
-0.020
 $D = 215$
0
-0.030
 $B = 40$
0
-0.200
 $r = 2.1 \sim 4$
(Radial Direction)
 $r = 2.1 \sim 6.5$
(Axial Direction)

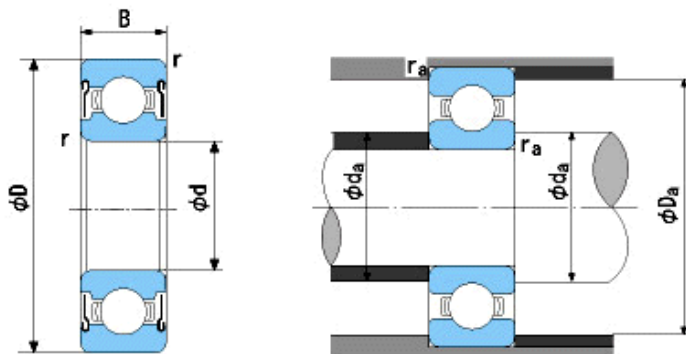

Dimensions

$d_a(\min) = 132$
 $D_a(\max) = 203$
 $r_a(\max) = 2$
Mass = 5.15 kg

Basic Dynamic Load Rating C_r : **145,000** N
Basic Static Load Rating C_{or} : **118,000** N
Limiting Speed ;
Grease Lubrication : **2,900** min⁻¹
Oil Lubrication : - min⁻¹

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	
Axial Runout with Raceway :	-	
Width Variation :	0.025	0.025
Radial Runout :	0.025	0.050