

Deep-groove Ball Bearings


Bearing No. : **NACHI 6238**

Bearing Type
Clearance
Tolerance Class

(0.025~0.071)

Dimensions

$d = 190$ $\begin{matrix} 0 \\ -0.030 \end{matrix}$
 $D = 340$ $\begin{matrix} 0 \\ -0.040 \end{matrix}$
 $B = 55$ $\begin{matrix} 0 \\ -0.300 \end{matrix}$
 $r = 4\sim 6.5$
 (Radial Direction)
 $r = 4\sim 9$
 (Axial Direction)

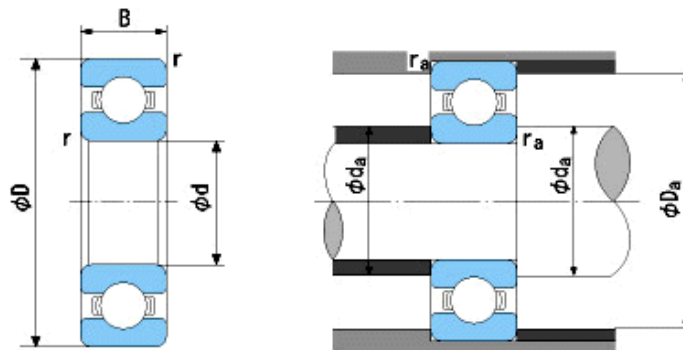

Dimensions
 $d_a(\min) = 208$
 $D_a(\max) = 322$
 $r_a(\max) = 3$
 Mass = 23 kg

Basic Dynamic Load Rating C_r : **255,000** N
 Basic Static Load Rating C_{or} : **282,000** N
 Limiting Speed ;
 Grease Lubrication : **1,800** min^{-1}
 Oil Lubrication : **2,100** min^{-1}

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	
Axial Runout with Raceway :	-	
Width Variation :	0.030	0.030
Radial Runout :	0.040	0.070