

Self-aligning Ball Bearings


Bearing No. : **NACHI 1320K**

Bearing Type
Clearance
Tolerance Class

(0.042~0.068)

Dimensions

$d = 100$ $+0.054$
 0
 $D = 215$ 0
 -0.030
 $B = 47$ 0
 -0.200
 $r = 3\sim 5$
 (Radial Direction)
 $r = 3\sim 8$
 (Axial Direction)

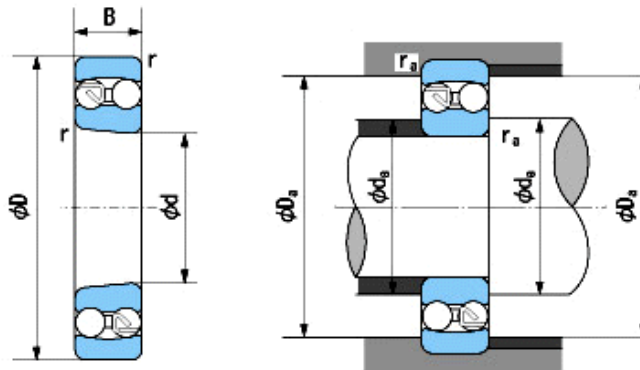

Dimensions
 $d_a(\min) = 113$
 $D_a(\max) = 202$
 $r_a(\max) = 2.5$
 Mass = 8.3 kg

Basic Dynamic Load Rating Cr :	143,000 N	INNER RING	OUTER RING
Basic Static Load Rating Cor :	57,300 N	O.D.Surface Runout with Side :	-
Limiting Speed ;		Axial Runout with Bore :	-
Grease Lubrication :	2,800 min ⁻¹	Axial Runout with Raceway :	-
Oil Lubrication :	3,400 min ⁻¹	Width Variation :	0.025 0.025
		Radial Runout :	0.025 0.050