

TopPage>>Search Result>>2216K


# Self-aligning Ball Bearings

Bearing No. : **NACHI 2216K**

**Bearing Type** 
**Clearance** 
**Tolerance Class** 
  
 (0.035~0.057)

**Dimensions**

$d = 80$  +0.046  
 0  
 $D = 140$  0  
 -0.018  
 $B = 33$  0  
 -0.150  
 $r = 2\sim3$   
 (Radial Direction)  
 $r = 2\sim4.5$   
 (Axial Direction)

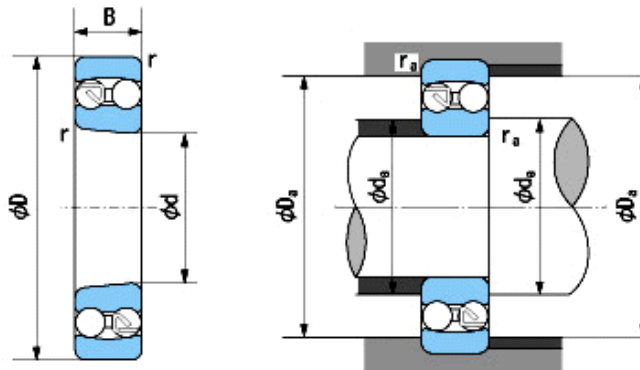

**Dimensions**  
 $d_a(\min) = 89$   
 $D_a(\max) = 131$   
 $r_a(\max) = 2$   
 Mass = 2.01 kg

Basic Dynamic Load Rating $C_r$ :	<b>49,000</b> N	INNER RING	OUTER RING
Basic Static Load Rating $C_{or}$ :	<b>19,900</b> N	O.D.Surface Runout with Side :	-
Limiting Speed ;		Axial Runout with Bore :	-
Grease Lubrication :	<b>4,100</b> min <sup>-1</sup>	Axial Runout with Raceway :	-
Oil Lubrication :	<b>5,000</b> min <sup>-1</sup>	Width Variation :	<b>0.025</b> <b>0.025</b>
		Radial Runout :	<b>0.020</b> <b>0.040</b>