

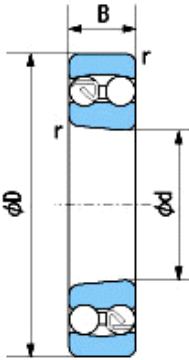
TopPage>>Search Result>>2222K

Self-aligning Ball Bearings

Bearing No. : **NACHI 2222K**

Bearing Type
Clearance
Tolerance Class

 (0.050~0.081)

<p>Dimensions</p> <p>d = 110 $+0.054$ 0</p> <p>D = 200 0 -0.030</p> <p>B = 53 0 -0.200</p> <p>r = 2.1~4 (Radial Direction)</p> <p>r = 2.1~6.5 (Axial Direction)</p>		<p>Dimensions</p> <p>da(min) = 121</p> <p>Da(max) = 189</p> <p>ra(max) = 2</p> <p>Mass = 7.10 kg</p>
--	--	--

Basic Dynamic Load Rating Cr :	120,000 N	INNER RING	OUTER RING
Basic Static Load Rating Cor :	48,900 N	O.D.Surface Runout with Side :	-
Limiting Speed ;		Axial Runout with Bore :	-
Grease Lubrication :	2,800 min ⁻¹	Axial Runout with Raceway :	-
Oil Lubrication :	3,400 min ⁻¹	Width Variation :	0.025 0.025
		Radial Runout :	0.025 0.050