

Thrust Ball Bearings

Bearing No. : **NACHI 51120**

■ Bearing Type

Flat back face ▼

■ Clearance



▼

■ Tolerance Class

Normal Class ▼

Dimensions

$d = 100$
 $D = 135$
 $T_3 = -$
 $T_4 = -$
 $r = 1 \sim 2.2$
 (Radial Direction and Axial Direction)
 $d_1(\max) = 135$
 $D_1(\min) = 102$
 $D_2 = -$
 $D_3 = -$
 $S = -$
 $R = -$
 $A = -$

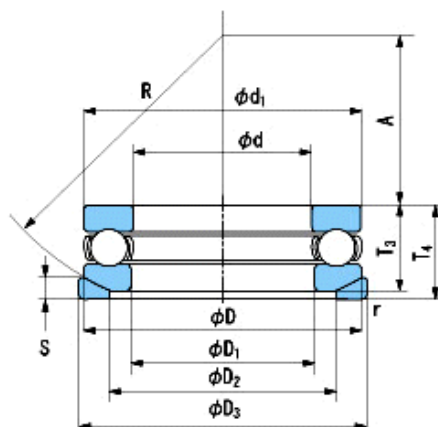

Dimensions
 $da(\min) = 121$
 $Da_2(\max) = -$
 $ra(\max) = 1$
 Mass = - kg

Basic Dynamic Load Rating C_a : **85,000** N

Basic Static Load Rating C_o : **268,000** N

Limiting Speed ;

Grease Lubrication : **1,700** min^{-1}

Oil Lubrication : **2,500** min^{-1}

O.D.Surface Runout with Side :

Axial Runout with Bore :

Axial Runout with Raceway :

Width Variation :

Radial Runout :

INNER RING

OUTER RING