

Thrust Ball Bearings

Bearing No. : **NACHI 51156**

■ Bearing Type

Flat back face ▼

■ Clearance


▼

■ Tolerance Class

Normal Class ▼


Dimensions

$d = 280$
 $D = 350$
 $T_3 = -$
 $T_4 = -$
 $r = 1.5 \sim 3.5$
 (Radial Direction and Axial Direction)
 $d_1(\max) = 347$
 $D_1(\min) = 283$
 $D_2 = -$
 $D_3 = -$
 $S = -$
 $R = -$
 $A = -$

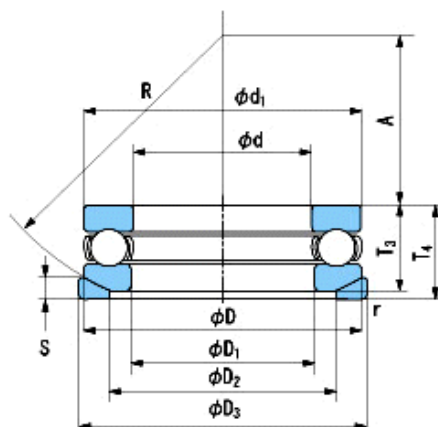

Dimensions

$da(\min) = 322$
 $Da_2(\max) = -$
 $ra(\max) = 1.5$
 Mass = - kg



Basic Dynamic Load Rating C_a : **315,000** N

Basic Static Load Rating C_{0a} : **1,350,000** N

Limiting Speed ;

Grease Lubrication : **700** min^{-1}

Oil Lubrication : **1,000** min^{-1}

O.D.Surface Runout with Side :

Axial Runout with Bore :

Axial Runout with Raceway :

Width Variation :

Radial Runout :

INNER RING

OUTER RING