

# Thrust Ball Bearings

Bearing No. : **NACHI 53201**


■ Bearing Type

■ Clearance

■ Tolerance Class

Dimensions

d = 12                    0  
                               -0.008  
 D = 28                    0  
                               -0.013  
 T3 = 11.4  
 r = 0.6~1.5  
 (Radial Direction and Axial Direction)  
 D1(min) = 14  
 d1(max) = 28  
 R = 25  
 A = 11.5

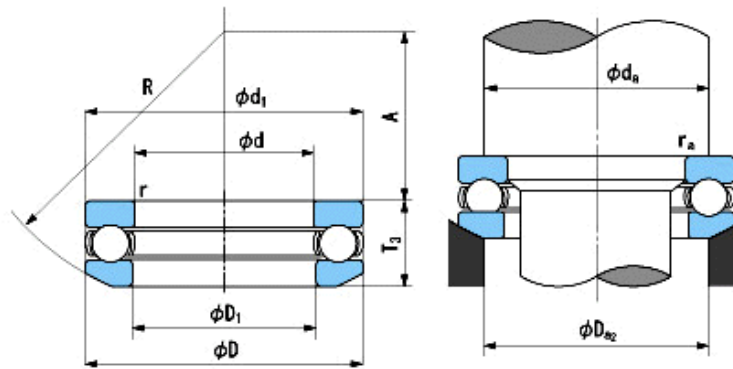

Dimensions

da(min) = 22  
 Da2(max) = 18  
 ra(max) = 0.6  
 Mass = 0.033 kg

Basic Dynamic Load Rating Ca :	<b>13,200</b> N	INNER RING	OUTER RING
Basic Static Load Rating Coa :	<b>19,000</b> N	O.D.Surface Runout with Side :	-
Limiting Speed ;		Axial Runout with Bore :	-
Grease Lubrication :	<b>5,600</b> min <sup>-1</sup>	Axial Runout with Raceway :	-
Oil Lubrication :	<b>8,500</b> min <sup>-1</sup>	Width Variation :	-
		Radial Runout :	-