

Thrust Ball Bearings

Bearing No. : **NACHI 53203U**


■ Bearing Type

■ Clearance

■ Tolerance Class

Dimensions

d = 17	0
	-0.008
D = 35	0
	-0.016
T3 = 13.2	
T4 = 15	
r = 0.6~1.5	
(Radial Direction and Axial Direction)	
d1(max) = 35	
D1(min) = 19	
D2 = 26	
D3 = 38	
S = 4	
R = 32	
A = 16	

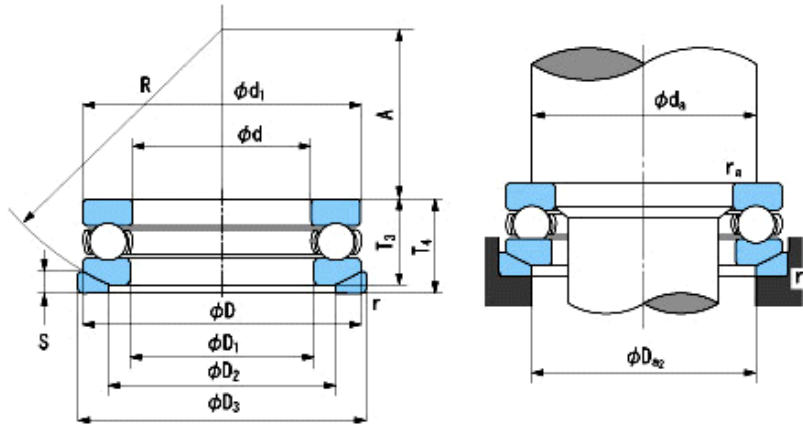

Dimensions

da(min) = 28
Da2(max) = 26
ra(max) = 0.6
Mass = 0.07 kg

Basic Dynamic Load Rating Ca : **17,100** N

Basic Static Load Rating Coa : **27,300** N

Limiting Speed ;

Grease Lubrication : **4,800** min⁻¹

Oil Lubrication : **7,300** min⁻¹

O.D.Surface Runout with Side :

Axial Runout with Bore :

Axial Runout with Raceway :

Width Variation :

Radial Runout :

INNER RING

OUTER RING

O.D.Surface Runout with Side :	-
Axial Runout with Bore :	-
Axial Runout with Raceway :	-
Width Variation :	-
Radial Runout :	-