

Thrust Ball Bearings

Bearing No. : **NACHI 53210U**


■ Bearing Type With aligning seat ▼

■ Clearance ▼

■ Tolerance Class Normal Class ▼


Dimensions

d = 50
0
-0.012
D = 78
0
-0.019
T3 = 23.5
T4 = 26
r = 1~2.2
(Radial Direction and Axial Direction)
d1(max) = 78
D1(min) = 52
D2 = 62
D3 = 82
S = 7.5
R = 64
A = 32.5

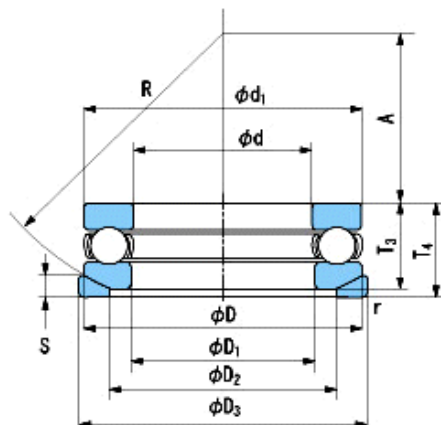

Dimensions

da(min) = 67
Da2(max) = 62
ra(max) = 1
Mass = 0.48 kg

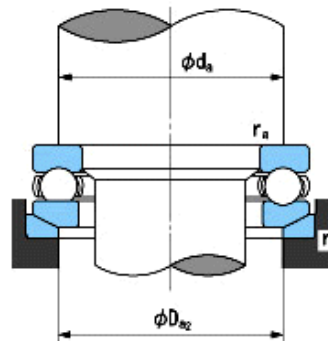

Basic Dynamic Load Rating Ca :	48,500 N
Basic Static Load Rating Coa :	112,000 N
Limiting Speed ;	
Grease Lubrication :	2,400 min ⁻¹
Oil Lubrication :	3,600 min ⁻¹

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	
Axial Runout with Raceway :	-	-
Width Variation :	-	-
Radial Runout :	-	-