

Thrust Ball Bearings

Bearing No. : **NACHI 53212**

■ Bearing Type

■ Clearance

■ Tolerance Class

Dimensions

d = 60
0
-0.015

D = 95
0
-0.022

T3 = 28


r = 1~2.2
(Radial Direction and Axial Direction)

D1(min) = 62

d1(max) = 95

R = 72

A = 32.5

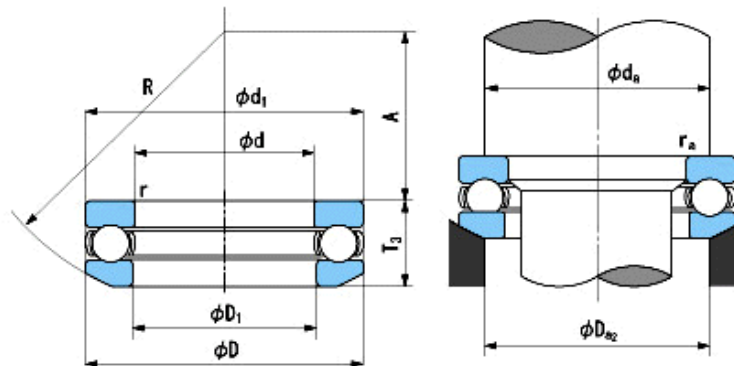

Dimensions
da(min) = 81
Da2(max) = 74
ra(max) = 1
Mass = 0.69 kg

Basic Dynamic Load Rating Ca : **73,500** N

Basic Static Load Rating Coa : **179,000** N

Limiting Speed ;

Grease Lubrication : **2,000** min⁻¹

Oil Lubrication : **3,000** min⁻¹

O.D.Surface Runout with Side :

Axial Runout with Bore :

Axial Runout with Raceway :

Width Variation :

Radial Runout :

INNER RING

OUTER RING