

Thrust Ball Bearings

Bearing No. : **NACHI 53218U**


■ Bearing Type

■ Clearance

■ Tolerance Class

Dimensions

d = 90	0 -0.020
D = 135	0 -0.025
T3 = 38.5	
T4 = 42	
r = 1.1~2.7	
(Radial Direction and Axial Direction)	
d1(max) = 135	
D1(min) = 93	
D2 = 110	
D3 = 140	
S = 13.5	
R = 100	
A = 45	

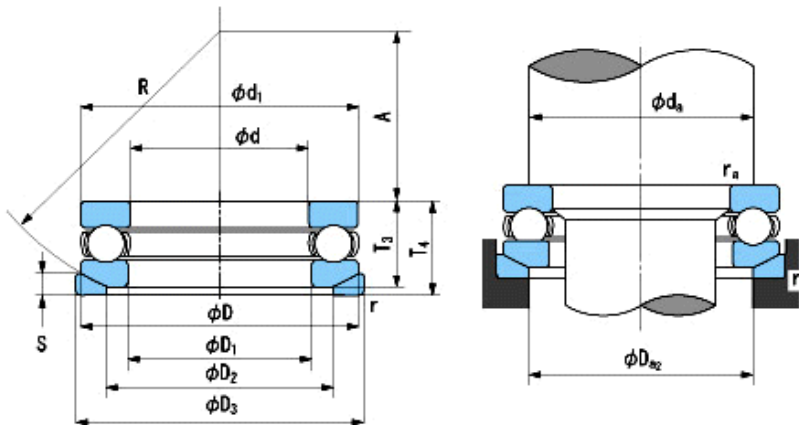

Dimensions

da(min) = 117
Da2(max) = 110
ra(max) = 1
Mass = 2.22 kg

Basic Dynamic Load Rating Ca : **116,000** N

Basic Static Load Rating Coa : **325,000** N

Limiting Speed ;

Grease Lubrication : **1,400** min⁻¹

Oil Lubrication : **2,100** min⁻¹

O.D.Surface Runout with Side :

Axial Runout with Bore :

Axial Runout with Raceway :

Width Variation :

Radial Runout :

INNER RING

OUTER RING

O.D.Surface Runout with Side :

Axial Runout with Bore :

Axial Runout with Raceway :

Width Variation :

Radial Runout :

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

