

Thrust Ball Bearings

Bearing No. : **NACHI 53220**

■ Bearing Type

■ Clearance


■ Tolerance Class

Dimensions

d = 100 0
 -0.020

D = 150 0
 -0.025

T3 = 40.9
r = 1.1~2.7
(Radial Direction and Axial Direction)
D1(min) = 103
d1(max) = 150
R = 112
A = 52

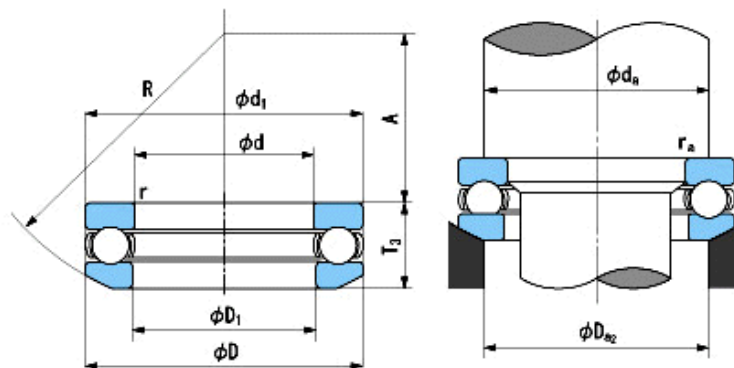

Dimensions
da(min) = 130
Da2(max) = 120
ra(max) = 1
Mass = 2.36 kg

Basic Dynamic Load Rating Ca : **146,000** N

Basic Static Load Rating Coa : **410,000** N

Limiting Speed ;

Grease Lubrication : **1,300** min⁻¹

Oil Lubrication : **1,900** min⁻¹

O.D.Surface Runout with Side :

Axial Runout with Bore :

Axial Runout with Raceway :

Width Variation :

Radial Runout :

INNER RING

OUTER RING

O.D.Surface Runout with Side : -

Axial Runout with Bore : -

Axial Runout with Raceway : -

Width Variation : -

Radial Runout : -