

Thrust Ball Bearings

Bearing No. : **NACHI 53228**


■ Bearing Type Spherical back face ▼

■ Clearance ▼

■ Tolerance Class Normal Class ▼

Dimensions

$d = 140$
 $D = 200$
 $T_3 = 48.6$
 $r = 1.5 \sim 3.5$
 (Radial Direction and Axial Direction)
 $D_1(\min) = 143$
 $d_1(\max) = 197$
 $R = 160$
 $A = 87$

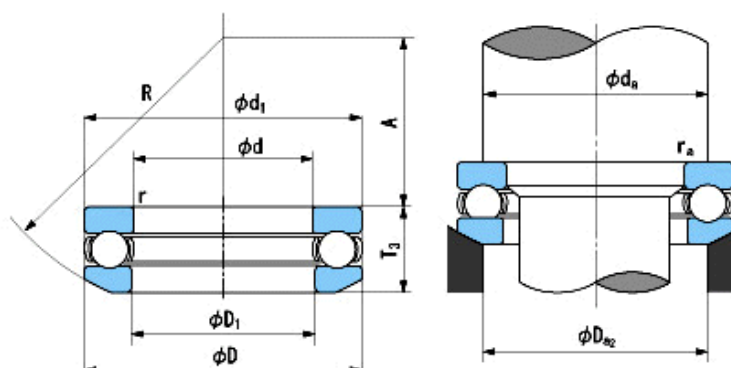

Dimensions

$d_a(\min) = 176$
 $Da_2(\max) = 164$
 $ra(\max) = 1.5$
 Mass = 4.4 kg

Basic Dynamic Load Rating C_a : **205,000** N
 Basic Static Load Rating C_o : **650,000** N
 Limiting Speed ;
 Grease Lubrication : **1,000** min⁻¹
 Oil Lubrication : **1,500** min⁻¹

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	
Axial Runout with Raceway :	-	-
Width Variation :	-	-
Radial Runout :	-	-