

Thrust Ball Bearings

Bearing No. : **NACHI 53228U**


■ Bearing Type With aligning seat ▼

■ Clearance ▼

■ Tolerance Class Normal Class ▼


Dimensions

$d = 140$
 $D = 200$
 $T_3 = 48.6$
 $T_4 = 55$
 $r = 1.5 \sim 3.5$
 (Radial Direction and Axial Direction)
 $d_1(\max) = 197$
 $D_1(\min) = 143$
 $D_2 = 170$
 $D_3 = 210$
 $S = 17$
 $R = 160$
 $A = 87$

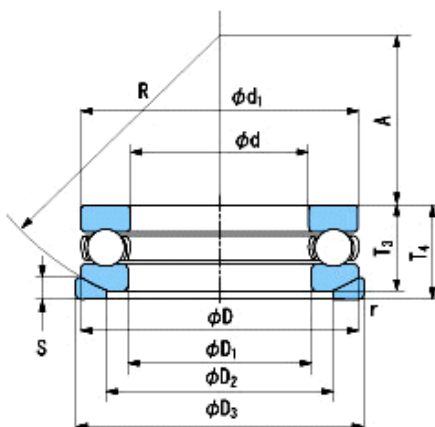

Dimensions

$da(\min) = 176$
 $Da_2(\max) = 170$
 $ra(\max) = 1.5$
 Mass = 5.61 kg



Basic Dynamic Load Rating C_a : **205,000** N

Basic Static Load Rating C_{0a} : **650,000** N

Limiting Speed ;

Grease Lubrication : **1,000** min^{-1}

Oil Lubrication : **1,500** min^{-1}

O.D.Surface Runout with Side :

Axial Runout with Bore :

Axial Runout with Raceway :

Width Variation :

Radial Runout :

INNER RING

OUTER RING