

# Thrust Ball Bearings

Bearing No. : **NACHI 53232U**

■ Bearing Type

■ Clearance

■ Tolerance Class

### Dimensions


d = 160  
0  
-0.025

D = 225  
0  
-0.030

T3 = 54.7  
T4 = 61  
r = 1.5~3.5  
(Radial Direction and Axial Direction)

d1(max) = 222  
D1(min) = 163

D2 = 190  
D3 = 235  
S = 21  
R = 160  
A = 74

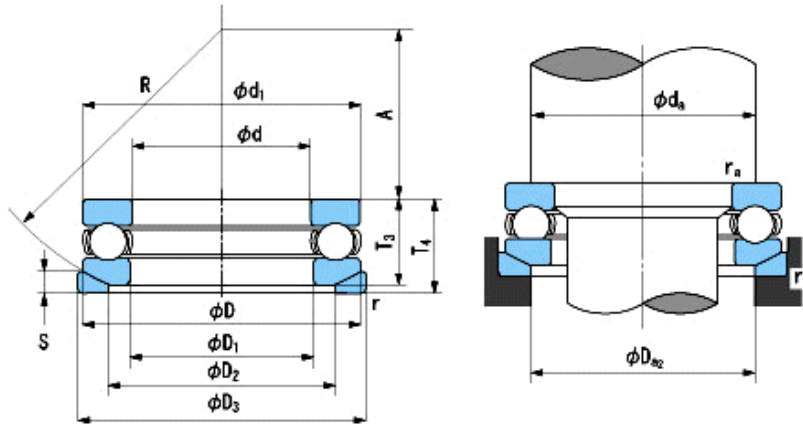

Dimensions  
da(min) = 223  
Da2(max) = 190  
ra(max) = 1.5  
Mass = 8.29 kg

Basic Dynamic Load Rating Ca : **223,000** N

Basic Static Load Rating Coa : **720,000** N

Limiting Speed ;

Grease Lubrication : **900** min<sup>-1</sup>

Oil Lubrication : **1,300** min<sup>-1</sup>

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	
Axial Runout with Raceway :	-	
Width Variation :	-	
Radial Runout :	-	