

# Thrust Ball Bearings

Bearing No. : **NACHI 53234**


■ Bearing Type

■ Clearance

■ Tolerance Class

### Dimensions

d = 170                    0  
                                 -0.025  
  
D = 240                    0  
                                 -0.030  
  
T3 = 58.7  
r = 1.5~3.5  
(Radial Direction and Axial Direction)  
D1(min) = 173  
d1(max) = 237  
R = 180  
A = 91

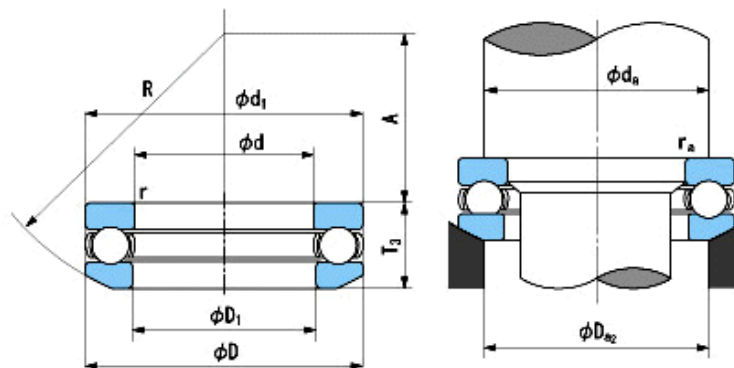

Dimensions  
da(min) = 212  
Da2(max) = 198  
ra(max) = 1.5  
Mass = 7.89 kg

Basic Dynamic Load Rating Ca : **261,000** N

Basic Static Load Rating Coa : **835,000** N

Limiting Speed ;

Grease Lubrication : **840** min<sup>-1</sup>

Oil Lubrication : **1,200** min<sup>-1</sup>

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	
Axial Runout with Raceway :	-	
Width Variation :	-	
Radial Runout :	-	