

Thrust Ball Bearings

Bearing No. : **NACHI 53238U**

Bearing Type

With aligning seat ▼

Clearance


▼

Tolerance Class

Normal Class ▼


Dimensions

d = 190
0
-0.030
D = 270
0
-0.035
T3 = 65.7
T4 = 73
r = 2~4
(Radial Direction and Axial Direction)
d1(max) = 267
D1(min) = 194
D2 = 230
D3 = 280
S = 23
R = 200
A = 98

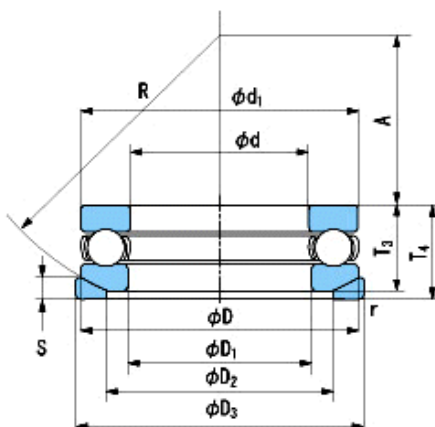

Dimensions

da(min) = 238
Da2(max) = 230
ra(max) = 2
Mass = 14 kg



Basic Dynamic Load Rating Ca : **310,000** N
Basic Static Load Rating Coa : **1,060,000** N
Limiting Speed ;
Grease Lubrication : **740** min⁻¹
Oil Lubrication : **1,100** min⁻¹

	INNER RING	OUTER RING
O.D.Surface Runout with Side :		-
Axial Runout with Bore :	-	
Axial Runout with Raceway :	-	-
Width Variation :	-	-
Radial Runout :	-	-