

Thrust Ball Bearings

Bearing No. : **NACHI 53244**

■ Bearing Type

■ Clearance


■ Tolerance Class

Dimensions

d = 220 0
 -0.030

D = 300 0
 -0.035

T3 = 65.6
r = 2~4
(Radial Direction and Axial Direction)
D1(min) = 224
d1(max) = 297
R = 225
A = 118

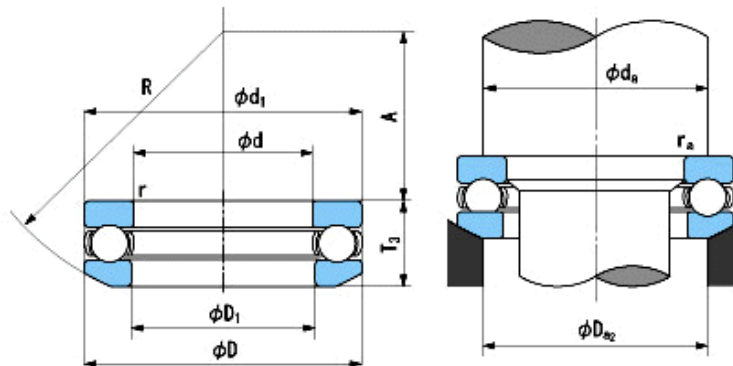

Dimensions
da(min) = 268
Da2(max) = 252
ra(max) = 2
Mass = 13 kg

Basic Dynamic Load Rating Ca : **325,000** N

Basic Static Load Rating Coa : **1,210,000** N

Limiting Speed ;

Grease Lubrication : **690** min⁻¹

Oil Lubrication : **1,000** min⁻¹

O.D.Surface Runout with Side :

Axial Runout with Bore :

Axial Runout with Raceway :

Width Variation :

Radial Runout :

INNER RING

OUTER RING

O.D.Surface Runout with Side :	-
Axial Runout with Bore :	-
Axial Runout with Raceway :	-
Width Variation :	-
Radial Runout :	-