



61805-2RZ Deep groove ball bearings

- Popular item

Deep groove ball bearings

Bearing data

[Tolerances,](#)

Normal (metric), P6, P5, Normal (inch),

[Radial internal clearance,](#)

Matched bearing pairs, Stainless steel


$d < 10$ mm, Other bearings

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fits](#)

Technical specification




DIMENSIONS

d	25 mm	Bore diameter
D	37 mm	Outside diameter
B	7 mm	Width
d_1	≈ 28.5 mm	Shoulder diameter
D_2	≈ 34.2 mm	Recess diameter
$r_{1,2}$	min. 0.6 mm	Chamfer dimension

ABUTMENT DIMENSIONS

d_{ϵ} min. 27 mm	Diameter of shaft abutment
d_{ϵ} max. 28.4 mm	Diameter of shaft abutment
D_{ϵ} max. 35 mm	Diameter of housing abutment
r_a max. 0.3 mm	Radius of shaft or housing fillet

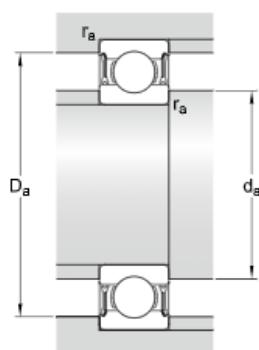

CALCULATION DATA

C	4.36 kN	Basic dynamic load rating
C ₀	2.6 kN	Basic static load rating
P _u	0.125 kN	Fatigue load limit
	38 000 r/min	Reference speed
	19 000 r/min	Limiting speed
k _r	0.015	Minimum load factor
f ₀	14.2	Calculation factor

MASS

0.022 kg	Mass bearing
----------	--------------

TOLERANCE CLASS

Normal	Dimensional tolerances
Normal	Radial run-out