



W 6004-2Z Deep groove ball bearings

- Popular item

Deep groove ball bearings

Bearing data

[Tolerances,](#)

Normal (metric), P6, P5, Normal (inch),

[Radial internal clearance,](#)

Matched bearing pairs, Stainless steel


$d < 10$ mm, Other bearings

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fits](#)

Technical specification

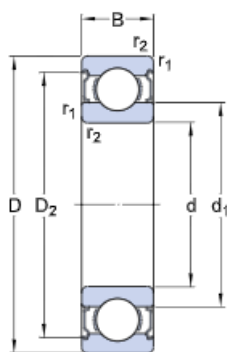


DIMENSIONS

d	20 mm	Bore diameter
D	42 mm	Outside diameter
B	12 mm	Width
d_1	≈ 27.6 mm	Shoulder diameter
d_2	≈ 27.6 mm	Recess diameter
D_2	≈ 38.75 mm	Recess diameter
$r_{1,2}$	min. 0.6 mm	Chamfer dimension

ABUTMENT DIMENSIONS

d_{ξ} min. 24 mm	Diameter of shaft abutment
d_{ξ} max. 27.5 mm	Diameter of shaft abutment
D_{ξ} max. 39.5 mm	Diameter of housing abutment
r_a max. 0.6 mm	Radius of shaft or housing fillet

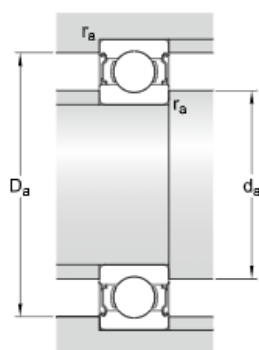

CALCULATION DATA

C	8.06 kN	Basic dynamic load rating
C ₀	5 kN	Basic static load rating
P _u	0.212 kN	Fatigue load limit
	38 000 r/min	Reference speed
	19 000 r/min	Limiting speed
k _r	0.03	Minimum load factor
f ₀	13.9	Calculation factor

MASS

0.065 kg	Mass bearing
----------	--------------

TOLERANCE CLASS

Normal	Dimensional tolerances
Normal	Radial run-out