



W 6007-2Z Deep groove ball bearings

Deep groove ball bearings

Bearing data

[Tolerances,](#)

Normal (metric), P6, P5, Normal (inch),

[Radial internal clearance,](#)

Matched bearing pairs, Stainless steel


$d < 10$ mm, Other bearings

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fits](#)

Technical specification

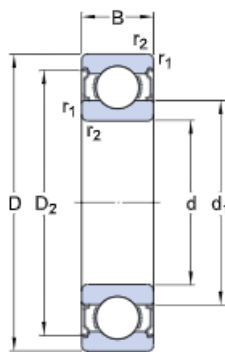


DIMENSIONS

d	35 mm	Bore diameter
D	62 mm	Outside diameter
B	14 mm	Width
d_1	≈ 44 mm	Shoulder diameter
d_2	≈ 44 mm	Recess diameter
D_2	≈ 57.05 mm	Recess diameter
h	10.1 mm	Depth of locating slot
b	8.5 mm	Width of locating slot
r_0	2 mm	Corner radius of locating slot
$r_{1,2}$	min. 1 mm	Chamfer dimension

ABUTMENT DIMENSIONS

d_c min.	40 mm	Diameter of shaft abutment
d_c max.	43.5 mm	Diameter of shaft abutment
D_i max.	57.5 mm	Diameter of housing abutment
r_a max.	1 mm	Radius of shaft or housing fillet



CALCULATION DATA

C	13.8 kN	Basic dynamic load rating
C ₀	10.2 kN	Basic static load rating
P _u	0.44 kN	Fatigue load limit
	24 000 r/min	Reference speed
	12 000 r/min	Limiting speed
k _r	0.03	Minimum load factor
f ₀	14.9	Calculation factor

MASS

0.15 kg	Mass bearing
---------	--------------

TOLERANCE CLASS

Normal	Dimensional tolerances
Normal	Radial run-out