



W 6009 Deep groove ball bearings

Deep groove ball bearings

Bearing data

[Tolerances,](#)

Normal (metric), P6, P5, Normal (inch),

[Radial internal clearance,](#)

Matched bearing pairs, Stainless steel


$d < 10$ mm, Other bearings

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fits](#)

Technical specification

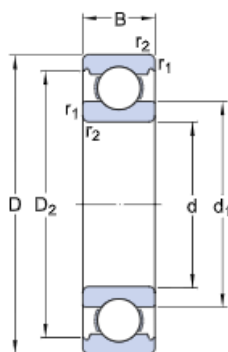


DIMENSIONS

d	45 mm	Bore diameter
D	75 mm	Outside diameter
B	16 mm	Width
d_1	≈ 54.5 mm	Shoulder diameter
D_2	≈ 69 mm	Recess diameter
$r_{1,2}$	min. 1 mm	Chamfer dimension

ABUTMENT DIMENSIONS

d_c min. 50 mm	Diameter of shaft abutment
D_i max. 70 mm	Diameter of housing abutment
r_a max. 1 mm	Radius of shaft or housing fillet

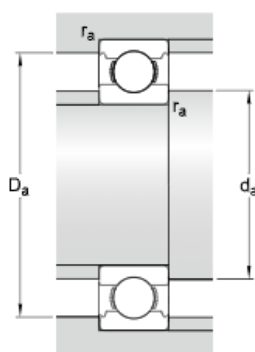

CALCULATION DATA

C	18.2 kN	Basic dynamic load rating
C ₀	15 kN	Basic static load rating
P _u	0.64 kN	Fatigue load limit
	20 000 r/min	Reference speed
	12 000 r/min	Limiting speed
k _r	0.03	Minimum load factor
f ₀	15.3	Calculation factor

MASS

0.22 kg	Mass bearing
---------	--------------

TOLERANCE CLASS

Normal	Dimensional tolerances
Normal	Radial run-out