



W 61805-2RZ Deep groove ball bearings

Deep groove ball bearings

Bearing data

[Tolerances,](#)

Normal (metric), P6, P5, Normal (inch),

[Radial internal clearance,](#)

Matched bearing pairs, Stainless steel


$d < 10$ mm, Other bearings

Bearing interfaces

[Seat tolerances for standard conditions,](#)


[Tolerances and resultant fits](#)

Technical specification

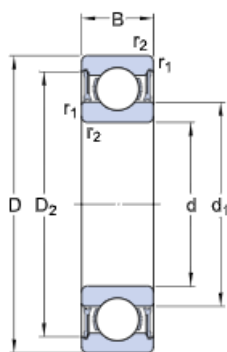

DIMENSIONS

d	25 mm	Bore diameter
D	37 mm	Outside diameter
B	7 mm	Width
d_1	≈ 28.2 mm	Shoulder diameter
d_2	≈ 28.2 mm	Recess diameter
D_2	≈ 34.12 mm	Recess diameter
$r_{1,2}$	min. 0.3 mm	Chamfer dimension

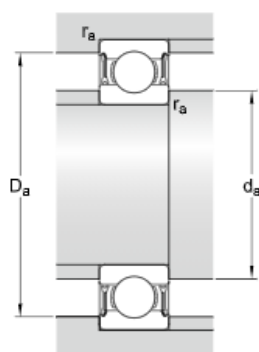

ABUTMENT DIMENSIONS

d_{ϵ} min. 27 mm	Diameter of shaft abutment
d_{ϵ} max. 28 mm	Diameter of shaft abutment
D_i max. 35 mm	Diameter of housing abutment
r_a max. 0.3 mm	Radius of shaft or housing fillet

CALCULATION DATA

C	3.38 kN	Basic dynamic load rating
C ₀	2.5 kN	Basic static load rating
P _u	0.108 kN	Fatigue load limit
	38 000 r/min	Reference speed
	19 000 r/min	Limiting speed
k _r	0.02	Minimum load factor
f ₀	13.7	Calculation factor

MASS

0.021 kg	Mass bearing
----------	--------------

TOLERANCE CLASS

Normal	Dimensional tolerances
Normal	Radial run-out