



W 61807-2RZ Deep groove ball bearings

Deep groove ball bearings

Bearing data

[Tolerances,](#)

Normal (metric), P6, P5, Normal (inch),

[Radial internal clearance,](#)

Matched bearing pairs, Stainless steel


$d < 10$ mm, Other bearings

Bearing interfaces

[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fits](#)

Technical specification

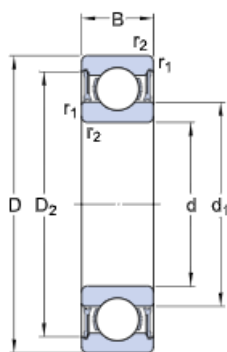


DIMENSIONS

d	35 mm	Bore diameter
D	47 mm	Outside diameter
B	7 mm	Width
d ₁	≈ 38.21 mm	Shoulder diameter
d ₂	≈ 38.21 mm	Recess diameter
D ₂	≈ 43.69 mm	Recess diameter
r _{1,2}	min. 0.3 mm	Chamfer dimension

ABUTMENT DIMENSIONS

d _ε min. 37 mm	Diameter of shaft abutment
d _ε max. 38 mm	Diameter of shaft abutment
D _i max. 45 mm	Diameter of housing abutment
r _a max. 0.3 mm	Radius of shaft or housing fillet

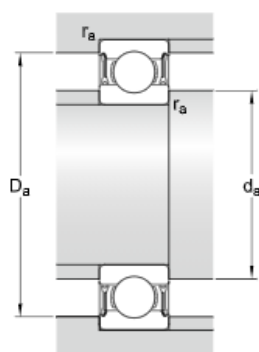

CALCULATION DATA

C	3.71 kN	Basic dynamic load rating
C ₀	3.35 kN	Basic static load rating
P _u	0.14 kN	Fatigue load limit
	30 000 r/min	Reference speed
	15 000 r/min	Limiting speed
k _r	0.02	Minimum load factor
f ₀	14.3	Calculation factor

MASS

0.03 kg	Mass bearing
---------	--------------

TOLERANCE CLASS

Normal	Dimensional tolerances
Normal	Radial run-out