

32210

- Popular item
- SKF Explorer

Tapered roller bearings, single row

Bearing data

[Tolerances,](#)

Normal and CL7C, CLN, Normal and CL, deviating width

Bearing interfaces


[Seat tolerances for standard conditions,](#)

[Tolerances and resultant fit](#)

Technical specification

Dimension series

3DC

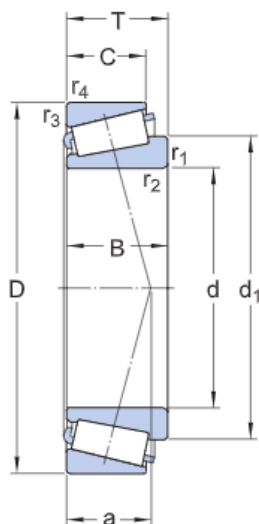


DIMENSIONS

d	50 mm	Bore diameter
D	90 mm	Outside diameter
T	24.75 mm	Total bearing width
d1	≈68.5 mm	Inner ring shoulder diameter
B	23 mm	Width inner ring
C	19 mm	Width outer ring
r1,2	min.1.5 mm	Corner radius inner ring
r3,4	min.1.5 mm	Corner radius outer ring
a	20.769 mm	Distance pressure point

ABUTMENT DIMENSIONS

da	max.58 mm	Abutment diameter shaft
	min.59	Abutment

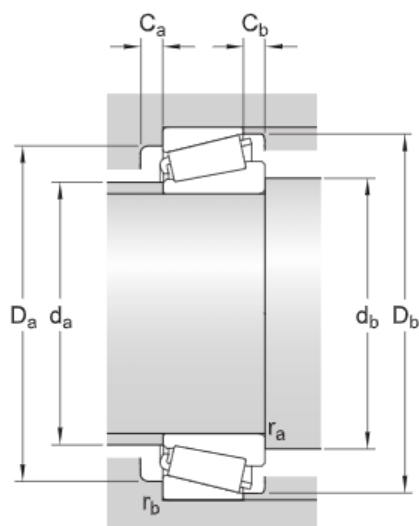

d_b	mm	diameter shaft
D_a	min.78 mm	Abutment diameter housing
D_a	max.82 mm	Abutment diameter housing
D_b	min.85 mm	Abutment diameter housing
C_a	min.3 mm	Abutment housing - axial space at the large side face/ both sides of the outer ring
C_b	min.5.5 mm	Abutment housing - axial space at the small side face/ both sides of the outer ring
r_a	max.1.5 mm	Fillet radius
r_b	max.1.5 mm	Fillet radius

CALCULATION DATA

Basic dynamic load rating	C	101 kN
Basic static load rating	C_0	100 kN
Fatigue load limit	P_u	11.4 kN
Reference speed		6 000 r/min
Limiting speed		7 500 r/min
Calculation factor	e	0.43
Calculation factor	Y	1.4
Calculation factor	Y_0	0.8

MASS

Mass bearing	0.62 kg
--------------	---------