

81104 TN

- Popular item



Cylindrical roller thrust bearings

Bearing data, Design considerations

[Tolerances,](#)

table, table, values,



[Design considerations,](#)

table

Bearing interfaces

[Seat tolerances for standard conditions](#)

Technical specification

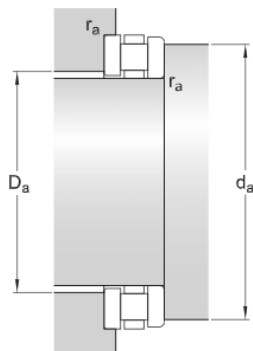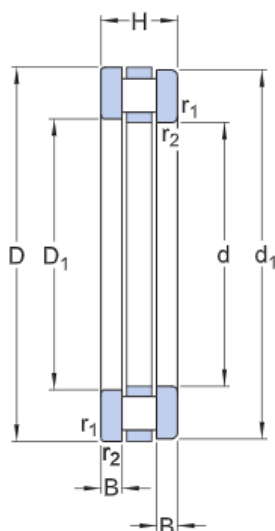

DIMENSIONS

d	20 mm	Bore diameter
D	35 mm	Outside diameter
H	10 mm	Nominal height
d ₁	35 mm	Outside diameter shaft washer
D ₁	21 mm	Bore diameter housing washer
B	2.75 mm	Height shaft washer
r _{1,2}	min.0.3 mm	Chamfer dimension housing washer

ABUTMENT DIMENSIONS

da	min.34 mm	Abutment diameter shaft
Da	max.21 mm	Abutment diameter housing
ra	max.0.3 mm	Fillet radius

CALCULATION DATA

Basic dynamic load rating	C	18.6 kN
Basic static load rating	C ₀	48 kN
Fatigue load limit	P _u	4.65 kN
Reference speed		3 800 r/min
Limiting speed		7 500 r/min
Minimum axial load factor	A	0

MASS

Mass bearing	0.037 kg
--------------	----------

INCLUDED PRODUCTS

Roller and cage thrust assembly	K 81104 TN
Shaft washer	WS 81104
Housing washer	GS 81104